


Technical Handbook



Worldwide Level and Flow SolutionsSM

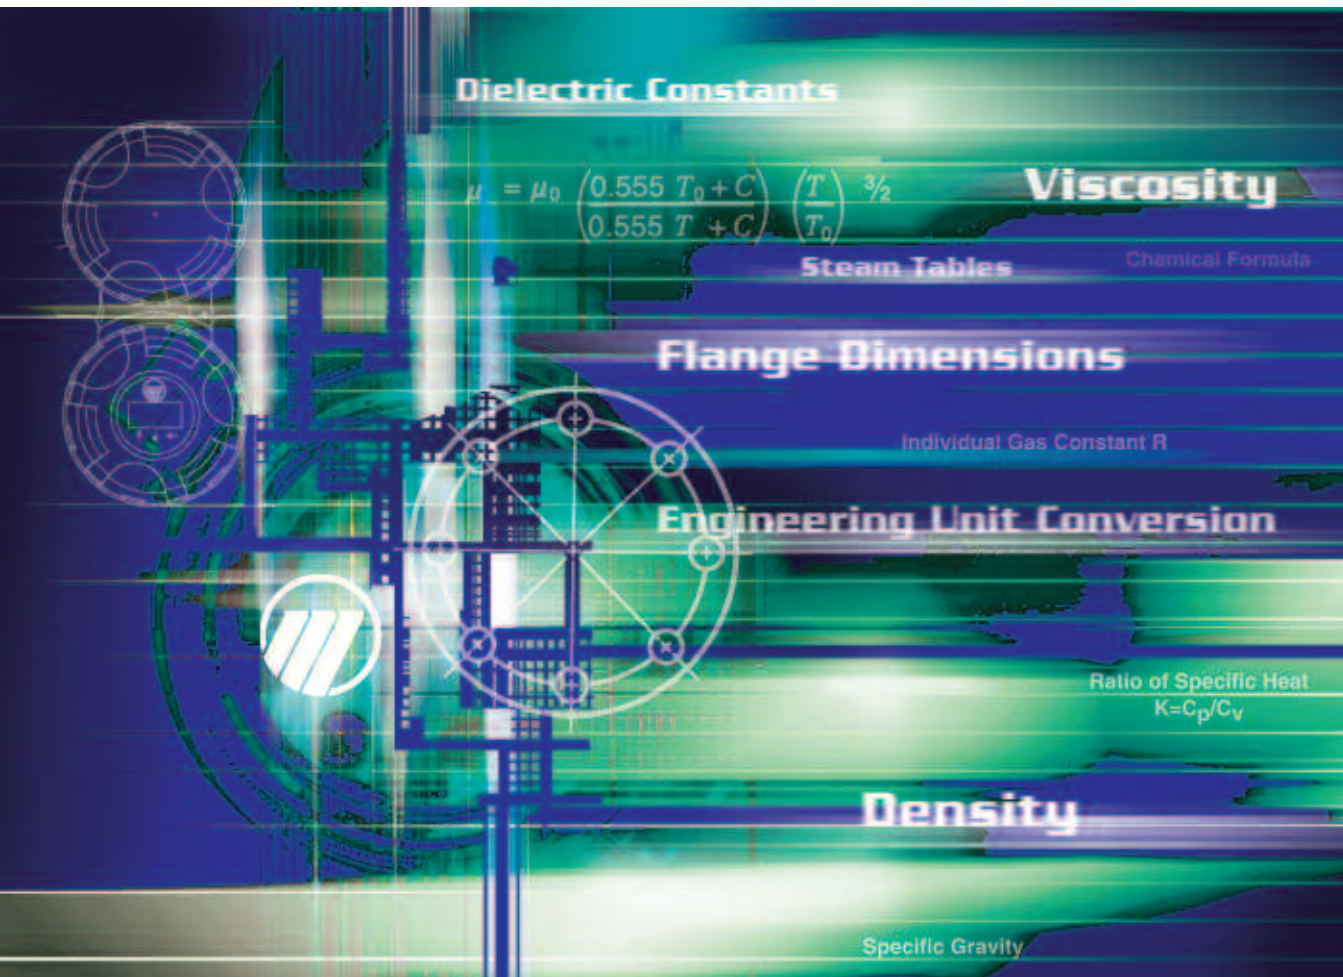

Magnetrol®

This Technical Handbook is the result of a combined effort by the Engineering, Sales, and Marketing Departments.

All reasonable efforts have been made to accurately compile the information contained in this handbook. However, no warranty is made with regard to any such information, and Magnetrol cannot assume responsibility for any possible errors or any direct or indirect result of the use of such information.

Table of Contents

Conversions

Metric Values.....	3
Metric Prefixes.....	3
Temperature	4
Flow Rate	5
Miscellaneous.....	7

Equivalents

Liquid Measures and Weights.....	14
Kinematic Viscosity	14
Absolute Viscosity	15
Electrical Units.....	15
Degrees API and Degrees Baumé	16
Kinematic and Saybolt Viscosity	17
Pressure and Head	18

Properties

Density and Specific Gravity of Selected Liquids	19
Density and Specific Gravity of Selected Gases	20
Density and Specific Gravity of Saturated Water.....	21
Density of Superheated Steam and Compressed Water	22
Specific Gravity of Petroleum Products	23
Density of Air	24
Speed of Sound	24
Dielectric Constants of Liquids.....	25
Dielectric Constants of Solids	31
Viscosity of Gases and Vapors	32
Viscosity of Water and Steam	33
Viscosity of Various Liquids.....	33
Viscosity of Petroleum Products	34

Pipe Data

Dimensions of Blind Flanges.....	35
Flange Ratings by Class	37
Plastic Flange Rating	39
ANSI Bolting Dimensions	39
Tri-Clamp Rating	39
Cast Iron Pipe	40
Steel Pipe	41

Conversions: Metric Values

The table below provides a fast and easy means of conversion from one metric notation to another. The value labeled "Unit" represents a basic unit of measurement, such as meter, gram, ohm, erg, etc. First, locate the original value in the left-hand column. Follow the row horizontally to the vertical column headed by the prefix of the desired value. The arrow and figure at this intersection represent the direction in which the decimal point should be moved and the number of places to move it.

Example: Convert 0.15 kilowatts to watts. Starting at the "Kilo-" box in the left-hand column, move horizontally to the column headed by "Unit" (since watt is a basic unit of measurement), and read 3 → . Thus 0.15 kilowatts is the equivalent of 150 watts.

Example: Convert 4,500 kilohertz to megahertz, read in the box horizontal to "Kilo-" and under "Mega-" the notation ← 3, which means a shift of the decimal point three places to the left. Thus, 4,500 kilohertz is the equivalent of 4.5 megahertz.

Original Value	Desired Value													
	Tera-	Giga-	Mega-	Myria-	Kilo-	Hecto-	Deka-	Unit	Deci-	Centi-	Milli-	Micro-	Nano-	Pico-
Tera-		3 →	6 →	8 →	9 →	10 →	11 →	12 →	13 →	14 →	15 →	18 →	21 →	24 →
Giga-	← 3		3 →	5 →	6 →	7 →	8 →	9 →	10 →	11 →	12 →	15 →	18 →	21 →
Mega-	← 6	← 3		2 →	3 →	4 →	5 →	6 →	7 →	8 →	9 →	12 →	15 →	18 →
Myria-	← 8	← 5	← 2		1 →	2 →	3 →	4 →	5 →	6 →	7 →	10 →	13 →	16 →
Kilo-	← 9	← 6	← 3	← 1		1 →	2 →	3 →	4 →	5 →	6 →	9 →	12 →	15 →
Hecto-	← 10	← 7	← 4	← 2	← 1		1 →	2 →	3 →	4 →	5 →	8 →	11 →	14 →
Deka-	← 11	← 8	← 5	← 3	← 2	← 1		1 →	2 →	3 →	4 →	7 →	10 →	13 →
Unit	← 12	← 9	← 6	← 4	← 3	← 2	← 1		1 →	2 →	3 →	6 →	9 →	12 →
Deci-	← 13	← 10	← 7	← 5	← 4	← 3	← 2	← 1		1 →	2 →	5 →	8 →	11 →
Centi-	← 14	← 11	← 8	← 6	← 5	← 4	← 3	← 2	← 1		1 →	4 →	7 →	10 →
Milli-	← 15	← 12	← 9	← 7	← 6	← 5	← 4	← 3	← 2	← 1		3 →	6 →	9 →
Micro-	← 18	← 15	← 12	← 10	← 9	← 8	← 7	← 6	← 5	← 4	← 3		3 →	6 →
Nano-	← 21	← 18	← 15	← 13	← 12	← 11	← 10	← 9	← 8	← 7	← 6	← 3		3 →
Pico-	← 24	← 21	← 18	← 16	← 15	← 14	← 13	← 12	← 11	← 10	← 9	← 6	← 3	

Conversions: Metric Prefixes

atto a	one-quintillionth	0.000 000 000 000 000 001	10 ⁻¹⁸
femto f	one-quadrillionth	0.000 000 000 000 001	10 ⁻¹⁵
pico p	one-trillionth	0.000 000 000 001	10 ⁻¹²
nano n	one-billionth	0.000 000 001	10 ⁻⁹
micro μ	one-millionth	0.000 001	10 ⁻⁶
milli m	one-thousandth	0.001	10 ⁻³
centi c	one-hundredth	0.01	10 ⁻²
deci d	one-tenth	0.1	10 ⁻¹
uni	one	1.0	10 ⁰
deka da	ten	10.0	10 ¹
hecto h	one hundred	100.0	10 ²
kilo k	one thousand	1 000.0	10 ³
mega M	one million	1 000 000	10 ⁶
giga G	one billion	1 000 000 000	10 ⁹
tera T	one trillion	1 000 000 000 000	10 ¹²

Conversions: Temperature

Locate temperature in middle column. If in degrees Celsius, read Fahrenheit equivalent in right hand column; if in degrees Fahrenheit, read Celsius equivalent in left hand column.

-459.4° to 0°			1 to 60°			61° to 290°			300° to 890°			900° to 3000°		
C	F	F	C	F	F	C	F	F	C	F	F	C	F	F
-273.1	-459.7		-17.2	1	33.8	16.1	61	141.8	149	300	572	482	900	1652
-268	-450		-16.7	2	35.6	16.7	62	143.6	154	310	590	488	910	1670
-262	-440		-16.1	3	37.4	17.2	63	145.4	160	320	608	493	920	1688
-257	-430		-15.6	4	39.2	17.8	64	147.2	166	330	626	499	930	1706
-251	-420		-15.0	5	41.0	18.3	65	149.0	171	340	644	504	940	1724
-246	-410		-14.4	6	42.8	18.9	66	150.8	177	350	662	510	950	1742
-240	-400		-13.9	7	44.6	19.4	67	152.6	182	360	680	516	960	1760
-234	-390		-13.3	8	46.4	20.0	68	154.4	188	370	698	521	970	1778
-229	-380		-12.8	9	48.2	20.6	69	156.2	193	380	716	527	980	1796
-223	-370		-12.2	10	50.0	21.1	70	158.0	199	390	734	532	990	1814
-218	-360		-11.7	11	51.8	21.7	71	159.8	204	400	752	538	1000	1832
-212	-350		-11.1	12	53.6	22.2	72	161.6	210	410	770	549	1020	1868
-207	-340		-10.6	13	55.4	22.8	73	163.4	216	420	788	560	1040	1904
-201	-330		-10.0	14	57.2	23.3	74	165.2	221	430	806	571	1060	1940
-196	-320		- 9.4	15	59.0	23.9	75	167.0	227	440	824	582	1080	1976
-190	-310		- 8.9	16	60.8	24.4	76	168.8	232	450	842	593	1100	2012
-184	-300		- 8.3	17	62.6	25.0	77	170.6	238	460	860	604	1120	2048
-179	-290		- 7.8	18	64.4	25.6	78	172.4	243	470	878	616	1140	2084
-173	-280		- 7.2	19	66.2	26.1	79	174.2	249	480	896	627	1160	2120
-169	-273.1	-459.7	- 6.7	20	68.0	26.7	80	176.0	254	490	914	638	1180	2156
-168	-270	-454	- 6.1	21	69.8	27.2	81	177.8	260	500	932	649	1200	2192
-162	-260	-436	- 5.6	22	71.6	27.8	82	179.6	266	510	940	660	1220	2228
-157	-250	-418	- 5.0	23	73.4	28.3	83	181.4	271	520	968	671	1240	2264
-151	-240	-400	- 4.4	24	75.2	28.9	84	183.2	277	530	986	682	1260	2300
-146	-230	-382	- 3.9	25	77.0	29.4	85	185.0	282	540	1004	693	1280	2336
-140	-220	-364	- 3.3	26	78.8	30.0	86	186.8	288	550	1022	704	1300	2372
-134	-210	-346	- 2.8	27	80.6	30.6	87	188.6	293	560	1040	732	1350	2462
-129	-200	-328	- 2.2	28	82.4	31.1	88	190.4	299	570	1058	760	1400	2552
-123	-190	-310	- 1.7	29	84.2	31.7	89	192.2	304	580	1076	788	1450	2642
-118	-180	-292	- 1.1	30	86.0	32.2	90	194.0	310	590	1094	816	1500	2732
-112	-170	-274	- 0.6	31	87.8	32.8	91	195.8	316	600	1112	843	1550	2822
-107	-160	-256	0.0	32	89.6	33.3	92	197.6	321	610	1130	871	1600	2912
-101	-150	-238	0.6	33	91.4	33.9	93	199.4	327	620	1148	899	1650	3002
- 96	-140	-220	1.1	34	93.2	34.4	94	201.2	332	630	1166	927	1700	3092
- 90	-130	-202	1.7	35	95.0	35.0	95	203.0	338	640	1184	954	1750	3182
- 84	-120	-184	2.2	36	96.8	35.6	96	204.8	343	650	1202	982	1800	3272
- 79	-110	-166	2.8	37	98.6	36.1	97	206.6	349	660	1220	1010	1850	3362
- 73	-100	-148	3.3	38	100.4	36.7	98	208.4	354	670	1238	1038	1900	3452
- 68	- 90	-130	3.9	39	102.2	37.2	99	210.2	360	680	1256	1066	1950	3542
- 62	- 80	-112	4.4	40	104.0	37.8	100	212.0	366	690	1274	1093	2000	3632
- 57	- 70	- 94	5.0	41	105.8	43	110	230	371	700	1292	1121	2050	3722
- 51	- 60	- 76	5.6	42	107.6	49	120	248	377	710	1310	1149	2100	3812
- 46	- 50	- 58	6.1	43	109.4	54	130	266	382	720	1328	1177	2150	3902
- 40	- 40	- 40	6.7	44	111.2	60	140	284	388	730	1346	1204	2200	3992
- 34	- 30	- 22	7.2	45	113.0	66	150	302	393	740	1364	1232	2250	4082
- 29	- 20	- 4	7.8	46	114.8	71	160	320	399	750	1382	1260	2300	4172
- 23	- 10	14	8.3	47	116.6	77	170	338	404	760	1400	1288	2350	4262
- 17.8	0	32	8.9	48	118.4	82	180	356	410	770	1418	1316	2400	4352
			9.4	49	120.2	88	190	374	416	780	1436	1343	2450	4442
			10.0	50	122.0	92	200	392	421	790	1454	1371	2500	4532
			10.6	51	123.8	99	210	410	427	800	1472	1399	2550	4622
			11.1	62	125.6	100	212	413.6	432	810	1490	1427	2600	4712
			11.7	53	127.4	104	220	428	438	820	1508	1454	2650	4802
			12.2	54	129.2	110	230	446	443	830	1526	1482	2700	4892
			12.8	55	131.0	116	240	464	449	840	1544	1510	2750	4982
			13.3	56	132.8	121	250	482	454	850	1562	1538	2800	5072
			13.9	57	134.6	127	260	500	460	860	1580	1566	2850	5162
			14.4	58	136.4	132	270	518	466	870	1598	1593	2900	5252
			15.0	59	138.2	138	280	536	471	880	1616	1621	2950	5342
			15.6	60	140.0	143	290	554	477	890	1634	1649	3000	5432

Conversions: Flow Rate

Velocity in Feet per Second.

Find the volume flow rate (gallons per minute) in the left hand column, read the velocity flow rate (feet per second) for a specific line size in the right hand column. (Based on Schedule 40 pipe.)

GPM	Line Size	Line Size	Line Size	Line Size	Line Size	Line Size	Line Size	Line Size	Line Size	Line Size	Line Size	Line Size
	1"											
0.03	0.011											
0.05	0.019											
0.10	0.037											
0.25	0.093											
0.50	0.186											
0.75	0.279											
1	0.371											
2	0.743											
3	1.114											
4	1.485											
5	1.857											
6	2.228											
8	2.971											
10	3.713											
15	5.570											
20	7.427											
25	9.283											
30												
35												
40												
45												
50												
60												
70												
80												
100												
125												
150												
175												
200												
225												
250												
275												
300												
325												
350												
375												
400												
425												
450												
475												
500												
550												
600												
650												
700												
750												
800												
850												
900												
950												
1,000												
1,100												
1,200												
1,300												
1,400												
1,500												
1,600												
1,800												
2,000												
2,500												

Conversions: Flow Rate (cont.)

Velocity in Meters per Second

Find the volume flow rate (cubic meters per hour) in the left hand column, read the velocity flow rate (meters per second) for a specific line size in the right hand column. (Based on Schedule 40 pipe.)

m ³ /hr	Line Size	Line Size	Line Size	Line Size	Line Size	Line Size	Line Size	Line Size	Line Size	Line Size	Line Size	Line Size
	1"											
0.02	0.010	1 1/4"	1 1/2"	2"	2 1/2"	3"	4"	5"	6"	8"	10"	
0.05	0.025	0.014	0.011	0.013	0.009	0.009	0.007	0.005	0.004	0.003	0.002	
0.10	0.050	0.029	0.021	0.019	0.014	0.012	0.010	0.008	0.006	0.005	0.003	
0.15	0.075	0.043	0.032	0.026	0.018	0.015	0.011	0.009	0.007	0.006	0.004	
0.20	0.100	0.057	0.042	0.032	0.023	0.017	0.012	0.009	0.007	0.006	0.004	
0.25	0.125	0.072	0.053	0.038	0.027	0.020	0.014	0.010	0.008	0.006	0.004	
0.30	0.149	0.086	0.063	0.045	0.032	0.023	0.017	0.012	0.009	0.007	0.005	
0.35	0.174	0.101	0.074	0.051	0.036	0.023	0.014	0.010	0.008	0.006	0.004	
0.40	0.199	0.115	0.085	0.064	0.045	0.029	0.017	0.011	0.008	0.006	0.004	
0.50	0.249	0.144	0.106	0.096	0.068	0.044	0.025	0.016	0.011	0.006	0.004	
0.75	0.374	0.216	0.159	0.128	0.090	0.058	0.034	0.022	0.015	0.009	0.005	
1.0	0.498	0.287	0.211	0.192	0.135	0.087	0.051	0.032	0.022	0.013	0.008	
1.5	0.747	0.431	0.317	0.256	0.180	0.117	0.068	0.043	0.030	0.017	0.011	
2.0	0.997	0.575	0.423	0.320	0.225	0.146	0.085	0.054	0.037	0.022	0.014	
2.5	1.246	0.719	0.529	0.384	0.270	0.175	0.101	0.065	0.045	0.026	0.016	
3.0	1.495	0.862	0.634	0.449	0.315	0.204	0.118	0.075	0.052	0.030	0.019	
3.5	1.744	1.006	0.740	0.513	0.360	0.233	0.135	0.086	0.060	0.034	0.022	
4.0	1.993	1.150	0.846	0.577	0.405	0.262	0.152	0.097	0.067	0.039	0.025	
4.5	2.242	1.294	0.952	0.641	0.450	0.291	0.169	0.108	0.075	0.043	0.027	
5.0	2.492	1.437	1.057	0.705	0.495	0.321	0.186	0.118	0.082	0.047	0.030	
5.5	2.741	1.581	1.163	0.769	0.540	0.350	0.203	0.129	0.089	0.052	0.033	
6.0		1.725	1.269	0.897	0.630	0.408	0.237	0.151	0.104	0.060	0.038	
7.0		2.012	1.480	1.025	0.720	0.466	0.271	0.172	0.119	0.069	0.044	
8.0		2.300	1.692	1.282	0.900	0.583	0.338	0.215	0.149	0.086	0.055	
10		2.875	2.114	1.538	1.080	0.699	0.406	0.258	0.179	0.103	0.066	
12			2.537	1.794	1.250	0.815	0.474	0.301	0.209	0.120	0.076	
14				2.050	1.440	0.933	0.541	0.344	0.238	0.138	0.087	
16				2.307	1.620	1.049	0.609	0.387	0.268	0.155	0.098	
18				2.563	1.800	1.166	0.676	0.430	0.298	0.172	0.109	
20				2.819	1.980	1.282	0.744	0.473	0.328	0.189	0.120	
22					2.160	1.399	0.812	0.516	0.358	0.207	0.131	
24					2.340	1.515	0.879	0.559	0.388	0.224	0.142	
26					2.520	1.632	0.947	0.602	0.417	0.241	0.153	
28					2.700	1.748	1.015	0.645	0.447	0.258	0.164	
30					2.880	1.865	1.082	0.688	0.477	0.275	0.175	
32					3.060	1.982	1.150	0.731	0.507	0.293	0.186	
34						2.098	1.218	0.774	0.537	0.310	0.197	
36						2.215	1.285	0.817	0.566	0.327	0.208	
38						2.331	1.353	0.860	0.596	0.344	0.218	
40						2.623	1.522	0.968	0.671	0.387	0.246	
45						2.914	1.691	1.075	0.745	0.430	0.273	
50						3.205	1.860	1.183	0.820	0.473	0.300	
55							2.029	1.291	0.894	0.516	0.328	
60							2.198	1.398	0.969	0.559	0.355	
65							2.368	1.506	1.043	0.602	0.382	
70							2.537	1.613	1.118	0.645	0.410	
75							2.706	1.721	1.192	0.689	0.437	
80							3.044	1.936	1.341	0.775	0.491	
90								2.151	1.490	0.861	0.546	
100								2.581	1.789	1.033	0.655	
120								3.011	2.087	1.205	0.765	
140									2.385	1.377	0.874	
160									2.683	1.549	0.983	
180										1.721	1.092	
200										2.152	1.365	
250										2.582	1.638	
300										3.012	1.911	
350											2.184	
400											2.457	
450											2.730	
500												

Conversions: Miscellaneous

TO CONVERT	INTO	MULTIPLY BY
A		
acres	sq. feet	43,560.0
"	sq. meters	4,047.0
"	sq. miles	1.562 x 10 ⁻³
"	sq. yards	4,840.0
acre-feet	cu. feet	43,560.0
"	gallons	3.259 x 10 ⁵
amperes/sq. cm.	amps./sq. in.	6.452
"	amps/sq. meter	10 ⁴
amperes/sq. in.	amps/sq. cm.	0.1550
"	amps/sq. meter	1,550.0
amperes/sq. meter	amps/sq. cm.	10 ⁴
"	amps/sq. in.	6.452 x 10 ⁻⁴
ampere-hours	coulombs	3,600.0
"	faradays	0.03731
ampere-turns	gilberts	1.257
ampere-turns/cm.	amp-turns/in.	2.540
"	amp-turns/meter	100.0
"	gilberts/cm.	1.257
ampere-turns/in.	amp-turns/cm.	0.3937
"	amp-turns/meter	39.37
"	gilberts/cm.	0.4950
ampere-turns/meter	amp-turns/cm.	0.01
"	amp-turns/in.	0.0254
"	gilberts/cm.	0.01257
ares	acres	0.02471
"	sq. meters	100.0
atmospheres	cms. of mercury	76.0
"	ft. of water (at 4°C)	33.90
"	in. of mercury (at 0°C)	29.92
"	kgs./sq. cm.	1.0333
"	kgs./sq. meter	10,332.0
"	pounds/sq. in.	14.70
"	tons/sq. ft.	1.058

B		
barrels (oil)	gallons (oil)	42.0
bars	atmospheres	0.9869
"	dynes/sq. cm.	1
"	kgs./sq. meter	1.020 x 10 ⁴
"	pounds/sq. ft.	2,089.0
"	pounds/sq. in.	14.50
Btu	ergs	1.0550 x 10 ¹⁰
"	foot-lbs.	778.3
"	gram-calories	252.0
"	horsepower-hrs.	3.931 x 10 ⁻⁴
"	joules	1,054.8
"	kilogram-calories	0.2520
"	kilogram-meters	107.5
"	kilowatt-hrs.	2.928 x 10 ⁻⁴
Btu/hr.	foot-pounds/sec.	0.2162
"	gram-cal./sec.	0.0700
"	horsepower-hrs.	3.929 x 10 ⁻⁴
"	watts	0.2931
Btu/min.	foot-lbs./sec.	12.96
"	horsepower	0.02356
"	kilowatts	0.01757
"	watts	17.57
Btu/sq. ft./min.	watts/sq. in.	0.1221
bushels	cu. ft.	1.2445
"	cu. in.	2,150.4
"	cu. meters	0.03524
"	liters	35.24
"	pecks	4.0
"	pints (dry)	64.0
"	quarts (dry)	32.0

TO CONVERT	INTO	MULTIPLY BY
C		
centares (centiares)	sq. meters	1.0
Centigrade	Fahrenheit	(C° x 9/5) + 32
centigrams	grams	0.01
centiliters	liters	0.01
centimeters	feet	3.281 x 10 ⁻²
"	inches	0.3937
"	kilometers	10 ⁻⁵
"	meters	0.01
"	miles	6.214 x 10 ⁻⁶
"	millimeters	10.0
"	mils	393.7
"	yards	1.094 x 10 ⁻²
centimeter-dynes	cm.-grams	1.020 x 10 ⁻³
"	meter-kgs.	1.020 x 10 ⁻⁶
"	pound-feet	7.376 x 10 ⁻⁹
centimeter-grams	cm.-dynes	980.7
"	meter-kgs.	10 ⁻⁵
"	pound-feet	7.233 x 10 ⁻⁵
centimeters of mercury	atmospheres	0.01310
"	feet of water	0.4401
"	kgs./sq. meter	136.0
"	pounds/sq. ft.	27.85
"	pounds/sq. in.	0.1934
centimeters/sec.	feet/min.	1.1969
"	feet/sec.	0.03281
"	kilometers/hr.	0.036
"	knots	0.1943
"	meters/min.	0.6
"	miles/hr.	0.02237
"	miles/min.	3.728 x 10 ⁻⁴
centimeters/sec./sec.	feet/sec./sec.	0.03281
"	kms./hr./sec.	0.036
"	meters/sec./sec.	0.01
"	miles/hr./sec.	0.02237
circular mils	sq. cms.	5.067 x 10 ⁻⁶
"	sq. mils	0.7854
"	sq. inches	7.854 x 10 ⁻⁷
coulombs	faradays	1.036 x 10 ⁻⁵
coulombs/sq. cm.	coulombs/sq. in.	64.52
"	coulombs/sq. meter	10 ⁴
coulombs/sq. in.	coulombs/sq. cm.	0.1550
"	coulombs/sq. meter	1,550.0
coulombs/sq. meter	coulombs/sq. cm.	10 ⁻⁴
"	coulombs/sq. in.	6.452 x 10 ⁻⁴
cubic centimeters	cu. feet	3.531 x 10 ⁻⁵
"	cu. inches	0.06102
"	cu. meters	10 ⁻⁶
"	cu. yards	1.308 x 10 ⁻⁶
"	gallons (U.S. liq.)	2.642 x 10 ⁻⁴
"	liters	0.001
"	pints (U.S. liq.)	2.113 x 10 ⁻³
"	quarts (U.S. liq.)	1.057 x 10 ⁻³
cubic feet	bushels (dry)	0.8036
"	cu. cms.	28,320.0
"	cu. inches	1,728.0
"	cu. meters	0.02832
"	cu. yards	0.03704
"	gallons (U.S. liq.)	7.48052
"	liters	28.32
"	pints (U.S. liq.)	59.84
"	quarts (U.S. liq.)	29.92
cubic feet/min.	cu. cms./sec.	472.0
"	gallons/sec.	0.1247
"	liters/sec.	0.4720
"	pounds of water/min.	62.43

Conversions: Miscellaneous (cont.)

TO CONVERT	INTO	MULTIPLY BY
C (cont.)		
cubic feet/sec.	million gals./day	0.646317
"	gallons/min.	448.831
cubic inches	cu. cms.	16.39
"	cu. feet	5.787×10^{-4}
"	cu. meters	1.639×10^{-5}
"	cu. yards	2.143×10^{-5}
"	gallons (U.S. liq.)	4.329×10^{-3}
"	liters	0.01639
"	mil.-ft.	1.061×10^5
"	pints (U.S. liq.)	0.03463
"	quarts (U.S. liq.)	0.01732
cubic meters	bushels (dry)	28.38
"	cu. cms.	10^6
"	cu. feet	35.31
"	cu. inches	61,023.0
"	cu. yards	1.308
"	gallons (U.S. liq.)	264.2
"	liters	10^3
"	pints (U.S. liq.)	2,113.0
"	quarts (U.S. liq.)	1,057.0
cubic yards	cu. cms.	7.646×10^5
"	cu. feet	27.0
"	cu. inches	46,656.0
"	cu. meters	0.7646
"	gallons (U.S. liq.)	202.0
"	liters	764.6
"	pints (U.S. liq.)	1,615.9
"	quarts (U.S. liq.)	807.9
cubic yards/min.	cubic ft./sec.	0.45
"	gallons/sec.	3.367
"	liters/sec.	12.74

D

days	hours	24.0
"	minutes	1,440.0
"	seconds	86,400.0
decigrams	grams	0.1
deciliters	liters	0.1
decimeters	meters	0.1
degrees (angle)	minutes	60.0
"	quadrants	0.01111
"	radians	0.01745
"	seconds	3,600.0
degrees/sec.	radians/sec.	0.01745
"	revolutions/min.	0.1667
"	revolutions/sec.	2.778×10^{-3}
dekagrams	grams	10.0
dekaliters	liters	10.0
dekameters	meters	10.0
drams	grams	1.7718
"	grains	27.3437
"	ounces	0.0625
dynes	grams	1.020×10^{-3}
"	joules/cm.	10^7
"	joules/meter (newtons)	10^{-5}
"	kilograms	1.020×10^{-6}
"	poundals	7.233×10^{-5}
"	pounds	2.248×10^{-6}
dynes/sq. cm.	bars	1
dynes/sq. meters	bars	10^{-4}

E

ergs	Btu	9.480×10^{-11}
"	dyne-centimeters	1.0
"	foot-pounds	7.378×10^{-8}
"	gram-calories	2.389×10^{-8}

TO CONVERT	INTO	MULTIPLY BY
E (cont.)		
ergs (continued)	gram-cms.	1.020×10^{-3}
"	horsepower-hrs.	3.7250×10^{-14}
"	joules	10^{-7}
"	kg.-calories	2.389×10^{-11}
"	kg.-meters	1.020×10^{-8}
"	kilowatt-hrs.	0.2778×10^{-13}
"	watt-hours	0.2778×10^{-10}
ergs/sec.	Btu/min.	$5,688.0 \times 10^{-9}$
"	ft.-lbs./min.	4.427×10^{-6}
"	ft.-lbs./sec.	7.3756×10^{-8}
"	horsepower	1.341×10^{-10}
"	kg.-calories/min.	1.433×10^{-9}
"	kilowatts	10^{-10}

F

farads	microfarads	10^6
faradays	ampere-hours	26.80
"	coulombs	9.649×10^4
fathoms	feet	6.0
feet	centimeters	30.48
"	kilometers	3.048×10^{-4}
"	meters	0.3048
"	miles (naut.)	1.645×10^{-4}
"	miles (stat.)	1.894×10^{-4}
"	millimeters	304.8
"	mils	1.2×10^4
feet of water	atmospheres	0.02950
"	in. of mercury	0.8826
"	kgs./sq. cm.	0.03048
"	kgs./sq. meter	304.8
"	pounds/sq. ft.	62.43
"	pounds/sq. in.	0.4335
feet/min.	cms./sec.	0.5080
"	feet/sec.	0.01667
"	kms./hr.	0.01829
"	meters/min.	0.3048
"	miles/hr.	0.01136
feet/sec.	cms./sec.	30.48
"	kms./hr.	1.097
"	knots	0.5921
"	meters/min.	18.29
"	miles/hr.	0.6818
"	miles/min.	0.01136
feet/sec./sec.	cms./sec./sec.	30.48
"	kms./hr./sec.	1.097
"	meters/sec./sec.	0.3048
"	miles/hr./sec.	0.6818
feet/100 feet	per cent grade	1.0
foot-pounds	Btu	1.286×10^{-3}
"	ergs	1.356×10^7
"	grams-calories	0.3238
"	hp-hrs.	5.050×10^{-7}
"	joules	1.356
"	kg.-calories	3.24×10^{-4}
"	kg.-meters	0.1383
"	kilowatt-hrs.	3.766×10^{-7}
foot-pounds/min.	Btu/min.	1.286×10^{-3}
"	foot-pounds/sec.	0.01667
"	horsepower	3.030×10^{-5}
"	kg.-calories/min.	3.24×10^{-4}
"	kilowatts	2.260×10^{-5}
foot-pounds/sec.	Btu/hr.	4.6263
"	Btu/min.	0.07717
"	horsepower	1.818×10^{-3}
"	kg.-calories/min.	0.01945
"	kilowatts	1.356×10^{-3}
furlongs	rods	40.0
"	feet	660.0

Conversions: Miscellaneous (cont.)

TO CONVERT	INTO	MULTIPLY BY
G		
gallons	cu. cms.	3,785.0
"	cu. feet	0.1337
"	cu. inches	231.0
"	cu. meters	3.785×10^{-3}
"	cu. yards	4.951×10^{-3}
"	liters	3.785
"	pints	8.0
"	quarts	4.0
gallons (liq. Br. Imp.)	gallons (U.S. liq.)	1.20095
gallons (U.S.)	gallons (Imp.)	0.83267
gallons of water	pounds of water	8.3453
gallons/min.	cu. ft./sec.	2.228×10^{-3}
"	liters/sec.	0.06308
"	cu. ft./hr.	8.0208
gausses	lines/sq. in.	6.452
"	webers/sq. cm.	10^{-8}
"	webers/sq. in.	6.452×10^{-8}
"	webers/sq. meter	10^{-4}
gilberts	ampere-turns	0.7958
gilberts/cm.	amp-turns/cm.	0.7958
"	amp-turns/in.	2.021
"	amp-turns/meter	79.58
gils	liters	0.1183
"	pints (liq.)	0.25
grains (troy)	grains (avdp.)	1.0
"	grams	0.06480
"	ounces (avdp.)	2.0833×10^{-3}
"	pennyweight (troy)	0.04167
grains/U.S. gal.	parts/million	17.118
"	pounds/million gal.	142.86
grains/Imp. gal.	parts/million	14.286
grams	dynes	980.7
"	grains	15.43
"	joules/cm	9.807×10^{-5}
"	joules/meter (newtons)	9.807×10^{-3}
"	kilograms	10^{-3}
"	milligrams	10^3
"	ounces (avdp.)	0.03527
"	ounces (troy)	0.03215
"	poundals	0.07093
"	pounds	2.205×10^{-3}
grams/cm.	pounds/inch	5.600×10^{-3}
grams/cu. cm.	pounds/cu. ft.	62.43
"	pounds/cu. in.	0.03613
"	pounds/mil.-foot	3.405×10^{-7}
grams/liter	grains/gal.	58.417
"	pounds/1,000 gal.	8.345
"	pounds/cu. ft.	0.062427
"	parts/million	1,000.0
grams/sq. cm.	pounds/sq. ft.	2.0481
gram-calories	Btu	3.9683×10^{-3}
"	ergs	4.1868×10^7
"	foot-pounds	3.0880
"	horsepower-hrs.	1.5596×10^{-6}
"	kilowatt-hrs.	1.1630×10^{-6}
"	watt-hrs.	1.1630×10^{-3}
gram-calories/sec.	Btu/hr.	14.286
gram-centimeters	Btu	9.297×10^{-8}
"	ergs	980.7
"	joules	9.807×10^{-5}
"	kg.-cal.	2.343×10^{-8}
"	kg-meters	10^{-5}

TO CONVERT	INTO	MULTIPLY BY
H		
hectares	acres	2.471
"	sq. foot	1.076×10^6
hectograms	grams	100.0
hectoliters	liters	100.0
hectometers	meters	100.0
hectowatts	watts	100.0
henries	millihenries	10^3
horsepower	Btu/min.	42.44
"	foot-lbs./min.	33,000.0
"	foot-lbs./sec.	550.0
horsepower (metric)	horsepower (542.5 ft. lb./sec.)	0.9863
horsepower (550 ft. lb./sec.)	horsepower (metric) (542.5 ft. lb./sec.)	1.014
horsepower	kg.-calories/min.	10.68
"	kilowatts	0.7457
"	watts	745.7
horsepower (boiler)	Btu/hr.	33,479
"	kilowatts	9.803
horsepower-hrs.	Btu	2,547.0
"	ergs	2.6845×10^{13}
"	foot-lbs.	1.98×10^6
"	gram-calories	641,190.0
"	joules	2.694×10^6
"	kg.-calories	641.1
"	kg.-meters	2.737×10^5
"	kilowatt-hrs.	0.7457
hours	days	4.167×10^{-2}
"	minutes	60.0
"	seconds	3,600.0
"	weeks	5.952×10^{-3}

I		
inches	centimeters	2.540
"	feet	8.333×10^{-2}
"	meters	2.540×10^{-2}
"	miles	1.578×10^{-5}
"	millimeters	25.40
"	mils	10^3
"	yards	2.778×10^{-2}
inches of mercury	atmospheres	0.03342
"	feet of water	1.133
"	kgs./sq. cm.	0.03453
"	kgs./sq. meter	345.3
"	pounds/sq. ft.	70.73
"	pounds/sq. in.	0.4912
inches of water (at 4°C)	atmospheres	2.458×10^{-3}
"	inches of mercury	0.07355
"	kgs./sq. cm.	2.540×10^{-3}
"	ounces/sq. in.	0.5781
"	pounds/sq. ft.	5.204
"	pounds/sq. in.	0.03613

J		
joules	Btu	9.480×10^{-4}
"	ergs	10^7
"	foot-pounds	0.7376
"	kg.-calories	2.389×10^{-4}
"	kg.-meters	0.1020
"	watt-hrs.	2.778×10^{-4}
joules/cm.	grams	1.020×10^{-4}
"	dynes	10^7
"	joules/meter (newtons)	100.0
"	poundals	723.3
"	pounds	22.48

Conversions: Miscellaneous (cont.)

TO CONVERT	INTO	MULTIPLY BY
K		
kilograms	dynes	980,665.0
"	grams	10 ³
"	joules/cm.	0.09807
"	joules/meter (newtons)	9.807
"	poundals	70.93
"	pounds	2.205
"	tons (long)	9.842 x 10 ⁻⁴
"	tons (short)	1.102 x 10 ⁻³
kilograms/cu. meter	grams/cu. cm.	0.001
"	pounds/cu. ft.	0.06243
"	pounds/cu. in.	3.613 x 10 ⁻⁵
"	pounds/mil.-foot	3.405 x 10 ⁻¹⁰
kilograms/meter	pounds/ft.	0.6720
kilograms/sq. cm.	atmospheres	0.9678
"	feet of water	32.81
"	inches of mercury	28.96
"	pounds/sq. ft.	2,048.0
"	pounds/sq. in.	14.22
kilograms/sq. meter	atmospheres	9.678 x 10 ⁻⁵
"	bars	98.07 x 10 ⁻⁶
"	feet of water	32.81 x 10 ⁻³
"	inches of mercury	2.896 x 10 ⁻³
"	pounds/sq. ft.	0.2048
"	pounds/sq. in.	1.422 x 10 ⁻³
kilograms/sq. mm.	kgs./sq. meter	10 ⁶
kilogram-calories	Btu	3.968
"	foot-pounds	3,088.0
"	hp-hrs.	1.560 x 10 ⁻⁷
"	joules	4,186.0
"	kg.-meters	426.9
"	kilojoules	4.186
"	kilowatt-hrs.	1.163 x 10 ⁻³
kilogram meters	Btu	9.294 x 10 ⁻³
"	ergs	9.804 x 10 ⁷
"	foot-pounds	7.233
"	joules	9.804
"	kg.-calories	2.342 x 10 ⁻³
"	kilowatt-hrs.	2.723 x 10 ⁻⁶
kilolines	maxwells	10 ³
kiloliters	liters	10 ³
kilometers	centimeters	10 ⁵
"	feet	3,281.0
"	inches	3.937 x 10 ⁴
"	meters	10 ³
"	miles	0.6214
"	millimeters	10 ⁶
"	yards	1,094.0
kilometers/hr.	cms./sec.	27.78
"	feet/min.	54.68
"	feet/sec.	0.9113
"	knots	0.5396
"	meters/min.	16.67
"	miles/hr.	0.6214
kilometers/hrs./sec.	cms./sec./sec.	27.78
"	ft./sec./sec.	0.9113
"	meters/sec./sec.	0.2778
"	miles/hr./sec.	0.6214
kilopascals	atmospheres	9.87x10 ⁻³
"	feet of water	0.335
"	inches of Hg	0.296
"	kgs/sq. meter	1.02x10 ²
"	pounds/sq. ft.	20.9
"	pounds/sq. in.	0.145
"	torr	7.5
kilowatts	Btu/min.	56.92
"	foot-lbs./min.	4.426 x 10 ⁴
"	foot-lbs./sec.	737.6

TO CONVERT	INTO	MULTIPLY BY
K (cont.)		
kilowatts (cont.)	horsepower	1.341
"	kg.-calories/min.	14.34
"	watts	10 ³
kilowatt-hrs.	Btu	3,413.0
"	ergs	3.600 x 10 ¹³
"	foot-lbs.	2.655 x 10 ⁶
"	gram-calories	859,850.0
"	horsepower-hrs.	1.341
"	joules	3.6 x 10 ⁶
"	kg.-calories	860.5
"	kg.-meters	3.671 x 10 ⁵
"	pounds of water evaporated from and at 212°F	3.53
"	pounds of water raised from 62° to 212°F	22.75
knots	feet/hr.	6,080.0
"	kilometers/hr.	1.8532
"	nautical miles/hr.	1.0
"	statute miles/hr.	1.151
"	yards/hr.	2,027.0
"	feet/sec.	1.689

L		
league	miles (approx.)	3.0
lines/sq. cm.	gausses	1.0
lines/sq. in.	gausses	0.1550
"	webers/sq. cm.	1.550 x 10 ⁻⁹
"	webers/sq. in.	10 ⁻⁸
"	webers/sq. meter	1.550 x 10 ⁻⁵
links (engineer's)	inches	12.0
links (surveyor's)	inches	7.92
liters	bushels (U.S. dry)	0.02838
"	cu. cm.	10 ³
"	cu. feet	0.03531
"	cu. inches	61.02
"	cu. meters	0.001
"	cu. yards	1.308 x 10 ⁻³
"	gallons (U.S. liq.)	0.2642
"	pints (U.S. liq.)	2.113
"	quarts (U.S. liq.)	1.057
liters/min.	cu. ft./sec.	5.886 x 10 ⁻⁴
"	gals./sec.	4.403 x 10 ⁻³
lumens/sq. ft.	foot-candles	1.0
lux	foot-candles	0.0929

M		
maxwells	kilolines	10 ⁻³
"	webers	10 ⁻⁸
megalines	maxwells	10 ⁶
megohms	microhms	10 ¹²
"	ohms	10 ⁶
meters	centimeters	10 ²
"	feet	3.281
"	inches	39.37
"	kilometers	0.001
"	miles (naut.)	5.396 x 10 ⁻⁴
"	miles (stat.)	6.214 x 10 ⁻⁴
"	millimeters	10 ³
"	yards	1.094
"	varas	1.179
meters/min.	cms./sec.	1.667
"	feet/min.	3.281
"	feet/sec.	0.5468
"	kms./hr.	0.06
"	knots	0.03238

Conversions: Miscellaneous (cont.)

TO CONVERT	INTO	MULTIPLY BY
M (cont.)		
meters/min. (cont.)	miles/hr.	0.03728
meters/sec.	feet/min.	196.8
"	feet/sec.	3.281
"	kilometers/hr.	3.6
"	miles/hr.	2.237
"	miles/min.	0.03728
meters/sec./sec.	cms./sec./sec.	10 ²
"	ft./sec./sec.	3.281
"	kms./hr./sec.	3.6
"	miles/hr./sec.	2.237
meter-kilograms	cm.-dynes	9.807 x 10 ⁷
"	cm.-grams	10 ⁵
"	pound-feet	7.233
microfarad	farads	10 ⁻⁶
micrograms	grams	10 ⁻⁶
microhms	megohms	10 ⁻¹²
"	ohms	10 ⁻⁶
microliters	liters	10 ⁻⁶
microns	meters	10 ⁻⁶
miles (naut.)	feet	6,080.27
"	kilometers	1.853
"	meters	1,853.00
"	miles (statute)	1.1516
"	yards	2,027.0
miles (statute)	centimeters	1.609 x 10 ⁵
"	feet	5,280.0
"	inches	6.336 x 10 ⁴
"	kilometers	1.609
"	meters	1,609.0
"	miles (naut.)	0.8684
"	yards	1,760.0
miles/hr.	cm./sec.	44.70
"	feet/min.	88.0
"	feet/sec.	1.467
"	kms./hr.	1.609
"	kms./min.	0.02682
"	knots	0.8684
"	meters/min.	26.82
"	miles/min.	0.01667
miles/hr./sec.	cms./sec./sec.	44.70
"	feet/sec./sec.	1.467
"	kms./hr./sec.	1.609
"	meters/sec./sec.	0.4470
miles/min.	cms./sec.	2,682.0
"	feet/sec.	88.0
"	kms./min.	1.609
"	miles (naut.)/min.	0.8684
"	miles/hr.	60.0
mil-feet	cu. inches	9.425 x 10 ⁻⁶
milliers	kilograms	10 ³
milligrams	grams	10 ⁻³
milligrams/liter	parts/million	1.0
millihenries	henries	10 ⁻³
milliliters	liters	10 ⁻³
millimeters	centimeters	0.1
"	feet	3.281 x 10 ⁻³
"	inches	0.03937
"	meters	0.001
"	miles	6.214 x 10 ⁻⁷
"	mils	39.37
"	yards	1.094 x 10 ⁻³
million gals./day	cu. ft./sec.	1.54723
mils	centimeters	2.540 x 10 ⁻³
"	feet	8.333 x 10 ⁻⁵
"	inches	0.001
"	kilometers	2.540 x 10 ⁻⁹

TO CONVERT	INTO	MULTIPLY BY
M (cont.)		
mils (cont.)	yards	2.778 x 10 ⁻⁵
miner's inches	cu. ft./min.	1.5
minutes (angles)	degrees	0.01667
"	quadrants	1.852 x 10 ⁻⁴
"	radians	2.909 x 10 ⁻⁴
"	seconds	60.0 myriagrams
	kilograms	10.0
myriameters	kilometers	10.0
myriawatts	kilowatts	10.0

N

nepers	decibels	8.686
--------	----------	-------

O

ohms	megohms	10 ⁻⁶
ohms	microhms	10 ⁶
ounces	drams	16.0
"	grains	437.5
"	grams	28.349527
"	pounds	0.0625
"	ounces (troy)	0.9115
"	tons (long)	2.790 x 10 ⁻⁵
"	tons (metric)	2.834 x 10 ⁻⁵
ounces (fluid)	cu. inches	1.805
"	liters	0.2957
ounces (troy)	grains	480.0
"	grams	31.103481
"	ounces (avdp.)	1.09714
"	pennyweights (troy)	20.0
"	pounds (troy)	0.08333
ounces/sq. in.	pounds/sq. in.	0.0625

P

parts/million	grains/U.S. gal.	0.0584
"	grains/Imp. gal.	0.07016
"	pounds/million gal.	8.345
pascals	millibar	10 ⁻²
"	pounds/sq. ft.	2.09 x 10 ⁻²
"	pounds/sq. in.	1.45 x 10 ⁻⁴
"	torr	7.5 x 10 ⁻³
"	in.Hg	2.96 x 10 ⁻⁴
pennyweights (troy)	grains	24.0
"	ounces (troy)	0.05
"	grams	1.55517
"	pounds (troy)	4.1667 x 10 ⁻³
pints (dry)	cu. inches	33.60
pints (liq.)	cu. cms.	473.2
"	cu. feet	0.01671
"	cu. inches	28.87
"	cu. meters	4.732 x 10 ⁻⁴
"	cu. yards	6.189 x 10 ⁻⁴
"	gallons	0.125
"	liters	0.4732
"	quarts (liq.)	0.5
poundals	dynes	13,826.0
"	grams	14.10
"	joules/cm.	1.383 x 10 ⁻³
"	joules/meter (newtons)	0.1383
"	kilograms	0.01410
"	pounds	0.03108
pounds	drams	256.0
"	dynes	44.4823 x 10 ⁴
"	grains	7,000.0
"	grams	453.5924
"	joules/cm.	0.04448
"	joules/meter (newton)	4.448

Conversions: Miscellaneous (cont.)

TO CONVERT	INTO	MULTIPLY BY
------------	------	-------------

P (cont.)

pounds (cont.)	kilograms	0.4536
"	ounces	16.0
"	ounces (troy)	14.5833
"	poundals	32.17
"	pounds (troy)	1.21528
"	tons (short)	0.0005
pounds (troy)	grains	5,760.0
"	grams	373.24177
"	ounces (avdp.)	13.1657
"	ounces (troy)	12.0 pounds (troy)
"	pennyweights (troy)	240.0
"	pounds (avdp.)	0.822857
"	tons (long)	3.6735×10^{-4}
"	tons (metric)	3.7324×10^{-4}
"	tons (short)	4.1143×10^{-4}
pounds of water	cu. feet	0.01602
"	cu. inches	27.68
"	gallons	0.1198
pounds of water/min.	cu. ft./sec.	2.670×10^{-4}
pounds-foot	cm.-dynes	1.356×10^7
"	cm.-grams	13,825.0
"	meter-kgs.	0.1383
pounds/cu. ft.	grams/cu. cm.	0.01602
"	kgs./cu. meter	16.02
"	pounds/cu. in.	5.787×10^{-4}
"	pounds/mil.-ft.	5.456×10^{-9}
pounds/cu. in.	gms./cu. cm.	27.68
"	kgs./cu. meter	2.768×10^4
"	pounds/cu. ft.	1,728.0
"	pounds/mil.-foot	9.425×10^{-6}
pounds/ft.	kgs./meter	1.488
pounds/in.	gms./cm.	178.6
pounds/mil.-foot	gms./cu. cm.	2.306×10^6
pounds/sq. ft.	atmospheres	4.725×10^{-4}
"	feet of water	0.01602
"	inches of mercury	0.01414
"	kgs./sq. meter	4.882
"	pounds/sq. in.	6.944×10^{-3}
pounds/sq. in.	atmospheres	0.06804
"	feet of water	2.307
"	inches of mercury	2.036
"	kgs./sq. meter	703.1
"	pounds/sq. ft.	144.0
"	kilopascal	6.8948

Q

quadrants (angle)	degrees	90.0
"	minutes	5,400.0
"	radians	1.571
"	seconds	3.24×10^5
quarts (dry)	cu. inches	67.20
quarts (liq.)	cu. cms.	946.4
"	cu. feet	0.03342
"	cu. inches	57.75
"	cu. meters	9.464×10^{-4}
"	cu. yards	1.238×10^{-3}
"	gallons	0.25
"	liters	0.9463

R

radians	degrees	57.30
"	minutes	3,438.0
"	quadrants	0.6366
"	seconds	2.063×10^5
radians/sec.	degrees sec.	57.30
"	revolutions/min.	9.549

TO CONVERT	INTO	MULTIPLY BY
------------	------	-------------

R (cont.)

radians/sec. (cont.)	revolutions/sec.	0.1592
radians/sec./sec.	revs./min./min.	573.0
"	revs./min./sec.	9.549
"	revs./sec./sec.	0.1592
revolutions	degrees	360.0
"	quadrants	4.00
"	radians	6.283
revolutions/min.	degrees/sec.	6.0
"	radians/sec.	0.1047
"	revs./sec.	0.01667
revolutions/min./min.	radians/sec./sec.	1.745×10^{-3}
"	revs./min./sec.	0.01667
"	revs./sec./sec.	2.778×10^{-4}
revolutions/sec.	degrees/sec.	360.0
"	radians/sec.	6.283
"	revs./min.	60.0
revolutions/sec./sec.	radians/sec./sec.	6.283
"	revs./min./min.	3,600.0
"	revs./min./sec.	60.0
rods	feet	16.5

S

seconds (angle)	degrees	2.778×10^{-4}
"	minutes	0.01667
"	quadrants	3.087×10^{-6}
"	radians	4.848×10^{-6}
square centimeters	circular mils	1.973×10^5
"	sq. feet	1.076×10^{-3}
"	sq. inches	0.1550
"	sq. meters	0.0001
"	sq. miles	3.861×10^{-11}
"	sq. millimeters	100.0
"	sq. yards	1.196×10^{-4}
square feet	acre	2.296×10^{-5}
"	circular mils	1.833×10^8
"	sq. cms.	929.0
"	sq. inches	144.0
"	sq. meters	0.09290
"	sq. miles	3.587×10^{-8}
"	sq. millimeters	9.290×10^4
"	sq. yards	0.1111
square inches	circular mils	1.273×10^6
"	sq. cms.	6.452
"	sq. feet	6.944×10^{-3}
"	sq. millimeters	645.2
"	sq. mils	10^6
"	sq. yards	7.716×10^{-4}
square kilometers	acres	247.1
"	sq. cms.	10^{10}
"	sq. ft.	10.76×10^6
"	sq. inches	1.550×10^9
"	sq. meters	10^6
"	sq. miles	0.3861
"	sq. yards	1.196×10^6
square meters	acres	2.471×10^{-4}
"	sq. cms.	10^4
"	sq. feet	10.76
"	sq. inches	1,550.0
"	sq. miles	3.861×10^{-7}
"	sq. millimeters	10^6
"	sq. yards	1.196
square miles	acres	640.0
"	sq. feet	27.88×10^6
"	sq. kms.	2.590
"	sq. meters	2.590×10^6
"	sq. yards	3.098×10^6

Conversions: Miscellaneous (cont.)

TO CONVERT	INTO	MULTIPLY BY
S (cont.)		
square millimeters	circular mils	1,973.0
"	sq. cms.	0.01
"	sq. feet	1.076×10^{-5}
"	sq. inches	1.550×10^{-4}
square mils	circular mils	1.273
"	sq. cms.	6.452×10^{-6}
"	sq. inches	10^{-6}
square yards	acres	2.066×10^{-4}
"	sq. cms.	8,361.0
"	sq. ft.	9.0
"	sq. inches	1,296.0
"	sq. meters	0.8361
"	sq. miles	3.228×10^{-7}
"	sq. millimeters	8.361×10^5

T

temperature (°C) + 273	absolute temperature (°C)	1.0
temperature (°C) + 17.78	temperature (°F)	1.8
temperature (°F) + 460	absolute temperature (°F)	1.0
temperature (°F) - 32	temperature (°C)	0.555
tons (long)	kilograms	1,016.0
"	pounds	2,240.0
"	tons (short)	1.120
tons (metric)	kilograms	1,000.0
"	pounds	2,205.0
tons (short)	kilograms	907.1848
"	ounces	32,000.0
"	ounces (troy)	29,166.66
"	pounds	2,000.0
"	pounds (troy)	2,430.56
"	tons (long)	0.89287
"	tons (metric)	0.9078
tons (short)/sq. ft.	kgs./sq. meter	9,765.0
"	pounds/sq. in.	2,000.0
tons of water/24 hrs.	pounds of water/hr.	83.333
"	gallons/min.	0.16643
"	cu. ft./hr.	1.3349

TO CONVERT	INTO	MULTIPLY BY
W		
watts	Btu/hr.	3.4192
"	Btu/min.	0.05688
"	ergs/sec.	107.0
"	foot-lbs./min.	44.27
"	foot-lbs./sec.	0.7378
"	horsepower	1.341×10^{-3}
"	horsepower (metric)	1.360×10^{-3}
"	kg.-calories/min.	0.01433
"	kilowatts	0.001
watt-hours	Btu	3.413
"	ergs	3.60×10^{10}
"	foot-pounds	2,656.0
"	gram-calories	859.85
"	horsepower-hrs.	1.341×10^{-3}
"	kilogram-calories	0.8605
"	kilogram-meters	367.2
"	kilowatt-hrs.	0.001
webers	maxwells	10^8
"	kilolines	10^5
webers/sq. in.	gausses	1.550×10^7
"	lines/sq. in.	10^8
"	webers/sq. cm.	0.1550
"	webers/sq. meter	1,550.0
webers/sq. meter	gausses	10^4
"	lines/sq. in.	6.452×10^4
"	webers/sq. cm.	10^{-4}
"	webers/sq. in.	6.452×10^{-4}

Y

yards	centimeters	91.44
"	feet	3.0
"	inches	36.0
"	kilometers	9.144×10^{-4}
"	meters	0.9144
"	miles (naut.)	4.934×10^{-4}
"	miles (stat.)	5.682×10^{-4}
"	millimeters	914.4

Equivalents: Liquid Measures and Weights

TO OBTAIN MULTIPLY BY	U.S. Gallon	Imperial Gallon	U.S. Pint	U.S. Pound Water*	U.S. Cubic Foot	U.S. Cubic Inch	Liter	Cubic Meter
U.S. Gallon	1	0.833	8.0	8.337	0.13368	231.0	3.78533	0.003785
Imperial Gallon	1.2009	1	9.60762	10.0	0.16054	277.42	4.54596	0.004546
U.S. Pint	0.125	0.1041	1	1.042	0.01671	28.875	0.473166	0.000473
U.S. Pound Water*	0.11995	0.1	0.9596	1	0.016035	27.708	0.45405	0.000454
U.S. Cubic Foot	7.48052	6.22888	59.8442	62.365	1	1728.0	28.31702	0.028317
U.S. Cubic Inch	0.004329	0.00361	0.034632	0.03609	0.0005787	1	0.016387	0.0000164
Liter	0.2641779	0.2199756	2.113423	2.202	0.0353154	61.02509	1	0.001000
Cubic Meter	264.170	219.969	2113.34	2202.0	35.31446	61023.38	999.972	1

*Water at 60°F (15.6°C)
1 Barrel = 42 gallons (petroleum measure)

EXAMPLE:
(8 Imperial gallons) (4.54596) = 36.36768 liters

Equivalents: Kinematic Viscosity

To convert kinematic viscosity from one set of units to another, locate the given set of units in the left hand column and multiply the numerical value by the factor shown horizontally to the right, under the set of units desired.

As an example, suppose a given kinematic viscosity of 0.5 square foot/second is to be converted to centistokes. By referring to the table, we find the conversion factor to be 92,900. Then, 0.5 (sq ft/sec) times 92,900 = 46,450 centistokes.

Kinematic Viscosity		centistokes	stokes	$\frac{\text{ft}^2}{\text{sec}}$
		(ν)	$\frac{\text{cm}^2}{\text{sec}}$	(ν')
		(ν)	(100 ν)	(ν')
centistokes	(ν)	1	0.01	1.076 (10^{-5})
stokes	(100 ν)	100	1	1.076 (10^{-3})
$\frac{\text{cm}^2}{\text{sec}}$	(ν)	92,900	929	1
$\frac{\text{ft}^2}{\text{sec}}$	(ν')			

Equivalents: Absolute (Dynamic) Viscosity

To convert absolute or dynamic viscosity from one set of units to another, locate the given set of units in the left hand column and multiply the numerical value by the factor shown horizontally to the right under the set of units desired.

As an example, suppose a given absolute viscosity of 2 poise is to be converted to N s/m². By referring to the table the conversion factor is 0.1. Thus 2 Poise is equal to 2 times 0.1, which is equal to 0.2 N s/m².

MULTIPLY BY						
CONVERT FROM	CONVERT TO					
	Poiseuille (Pa s)	Poise (dyne s/cm ²) (g/cm s)	N s/m ²	centiPoise	kg _r s/m ²	kg/m h
Poiseuille (Pa s)	1	10	1	1000	0.102	3600
Poise (dyne s/cm ²) (g/cm s)	0.1	1	0.1	100	0.0102	360
N s/m ²	1	10	1	1000	0.102	3600
centiPoise	0.001	0.01	0.001	1	0.000102	3.6
kg _r s/m ²	9.81	98.1	9.807	9807	1	35.304
slugs/ftsec (lb s/ft ²)	47.9	479	47.9	4.79 x 10 ⁴	4.882	1.72 x 10 ⁵
lb/ft s	1.49	14.9	1.488	1,488	0.152	5,357

Equivalents: Electrical Units

	Practical Unit	Cgs Electromagnetic Unit	Cgs Electrostatic Unit
Emf	volt = 10 ⁸ abvolts volt = 3.3 x 10 ⁻⁹ statvolt	abvolt = 10 ⁻⁸ volt abvolt = 3.3 x 10 ⁻¹¹ statvolt	statvolt = 300 volts (approx.) statvolt = 3 x 10 ¹⁰ abvolts
Resistance	ohm = 10 ⁹ abohms ohm = 1.1 x 10 ⁻¹² statohm	abohm = 10 ⁻⁹ ohm abohm = 1.1 x 10 ⁻²¹ statohm	statohm = 9 x 10 ¹¹ ohms statohm = 9 x 10 ²⁰ abohms
Current	ampere = 10 ⁻¹ abampere ampere = 3 x 10 ⁹ statamperes	abampere = 10 amperes abampere = 3 x 10 ¹⁰ statamperes	statampere = 3.3 x 10 ⁻¹⁰ ampere statampere = 3.3 x 10 ⁻¹¹ abampere
Quantity	coulomb = 10 ⁻¹ abcoulomb coulomb = 3 x 10 ⁹ statcoulombs	abcoulomb = 10 coulombs abcoulomb = 3 x 10 ¹⁰ statcoulombs	statcoulomb = 3.3 x 10 ⁻¹⁰ coulomb statcoulomb = 3.3 x 10 ⁻¹¹ abcoulombs
Capacitance	farad = 10 ⁻⁹ abfarads farad = 9 x 10 ¹¹ statfarads	abfarad = 10 ⁹ farads abfarad = 9 x 10 ²⁰ statfarads	statfarad = 1.1 x 10 ⁻¹² farads statfarad = 1.1 x 10 ⁻²¹ abfarads
Inductance	henry = 10 ⁹ abhenries henry = 1.1 x 10 ⁻¹² stathenry	abhenry = 10 ⁻⁹ henry abhenry = 1.1 x 10 ⁻²¹ stathenries	stathenry = 9 x 10 ¹¹ henries stathenry = 9 x 10 ²⁰ abhenries
Energy	joule = 10 ⁷ ergs	erg = 10 ⁻⁷ joule	erg = 10 ⁻⁷ joule
Power	watt = 10 ⁷ $\frac{\text{ergs}}{\text{sec}}$	erg = 10 ⁻⁷ watt sec	erg = 10 ⁻⁷ watt sec

Equivalents: Degrees API and Degrees Baumé

Degrees on API or Baumé Scale	Values for API Scale Oil			Values for Baumé Scale					
	Specific Gravity	Weight Density Lb/Ft ³	Pounds per Gallon	Liquids Lighter Than Water			Liquids Heavier Than Water		
				Specific Gravity	Weight Density Lb/Ft ³	Pounds per Gallon	Specific Gravity	Weight Density Lb/Ft ³	Pounds per Gallon
<i>S</i>	<i>p</i>		<i>S</i>	<i>p</i>		<i>S</i>	<i>p</i>		
0	—	—	—	—	—	—	1.0000	62.36	8.337
2	—	—	—	—	—	—	1.0140	63.24	8.454
4	—	—	—	—	—	—	1.0284	64.14	8.574
6	—	—	—	—	—	—	1.0432	65.06	8.697
8	—	—	—	—	—	—	1.0584	66.01	8.824
10	1.0000	62.36	8.337	1.0000	62.36	8.337	1.0741	66.99	8.955
12	0.9861	61.50	8.221	0.9859	61.49	8.219	1.0902	67.99	9.089
14	0.9724	60.65	8.108	0.9722	60.63	8.105	1.1069	69.03	9.228
16	0.9593	59.53	7.998	0.9589	59.80	7.994	1.1240	70.10	9.371
18	0.9465	59.03	7.891	0.9459	58.99	7.886	1.1417	71.20	9.518
20	0.9340	58.25	7.787	0.9333	58.20	7.781	1.1600	72.34	9.671
22	0.9218	57.87	7.736	0.9211	57.44	7.679	1.1789	73.52	9.828
24	0.9100	56.75	7.587	0.9091	56.70	7.579	1.1983	74.73	9.990
26	0.8984	56.03	7.490	0.8974	55.97	7.482	1.2185	75.99	10.159
28	0.8871	55.32	7.396	0.8861	55.26	7.387	1.2393	77.29	10.332
30	0.8762	54.64	7.305	0.8750	54.57	7.295	1.2609	78.64	10.512
32	0.8654	53.97	7.215	0.8642	53.90	7.205	1.2832	80.03	10.698
34	0.8550	53.32	7.128	0.8537	53.24	7.117	1.3063	81.47	10.891
36	0.8448	52.69	7.043	0.8434	52.60	7.031	1.3303	82.96	11.091
38	0.8348	52.06	6.960	0.8333	51.97	6.947	1.3551	84.51	11.297
40	0.8251	51.46	6.879	0.8235	51.36	6.865	1.3810	86.13	11.513
42	0.8155	50.86	6.799	0.8140	50.76	6.786	1.4078	87.80	11.737
44	0.8063	50.28	6.722	0.8046	50.18	6.708	1.4356	89.53	11.969
46	0.7972	49.72	6.646	0.7955	49.61	6.632	1.4646	91.34	12.210
48	0.7883	49.16	6.572	0.7865	49.05	6.557	1.4948	93.22	12.462
50	0.7796	48.62	6.499	0.7778	48.51	6.484	1.5263	95.19	12.725
52	0.7711	48.09	6.429	0.7692	47.97	6.413	1.5591	97.23	12.998
54	0.7628	47.57	6.359	0.7609	47.45	6.344	1.5934	99.37	13.284
56	0.7547	47.07	6.292	0.7527	46.94	6.275	1.6292	101.60	13.583
58	0.7467	46.57	6.225	0.7447	46.44	6.209	1.6667	103.94	13.895
60	0.7389	46.08	6.160	0.7368	45.95	6.143	1.7059	106.39	14.222
62	0.7313	45.61	6.097	0.7292	45.48	6.079	1.7470	108.95	14.565
64	0.7238	45.14	6.034	0.7216	45.00	6.016	1.7901	111.64	14.924
66	0.7165	44.68	5.973	0.7143	44.55	5.955	1.8354	114.46	15.302
68	0.7093	44.23	5.913	0.7071	44.10	5.895	1.8831	117.44	15.699
70	0.7022	43.79	5.854	0.7000	43.66	5.836	1.9333	120.57	16.118
72	0.6953	43.36	5.797	0.6931	43.22	5.788	—	—	—
74	0.6886	42.94	5.741	0.6863	42.80	5.722	—	—	—
76	0.6819	42.53	5.685	0.6796	42.38	5.666	—	—	—
78	0.6754	42.12	5.631	0.6731	41.98	5.612	—	—	—
80	0.6690	41.72	5.577	0.6667	41.58	5.558	—	—	—
82	0.6628	41.33	5.526	0.6604	41.19	5.506	—	—	—
84	0.6566	40.95	5.474	0.6542	40.80	5.454	—	—	—
86	0.6506	40.57	5.424	0.6482	40.42	5.404	—	—	—
88	0.6446	40.20	5.374	0.6422	40.05	5.354	—	—	—
90	0.6388	39.84	5.326	0.6364	39.69	5.306	—	—	—
92	0.6331	39.48	5.278	0.6306	39.33	5.257	—	—	—
94	0.6275	39.13	5.231	0.6250	38.98	5.211	—	—	—
96	0.6220	38.79	5.186	0.6195	38.63	5.165	—	—	—
98	0.6166	38.45	5.141	0.6140	38.29	5.119	—	—	—
100	0.6112	38.12	5.096	0.6087	37.96	5.075	—	—	—

Equivalents: Kinematic and Saybolt Viscosity

Equivalents of Kinematic and Saybolt Furol Viscosity

Kinematic Viscosity, Centistokes ν	Equivalent Saybolt Furol Viscosity, Sec	
	At 122°F (50°C) Basic Values	At 210°F (99°C)
48	25.3	
50	26.1	25.2
60	30.6	29.8
70	35.1	34.4
80	39.6	39.0
90	44.1	43.7
100	48.6	48.3
125	60.1	60.1
150	71.7	71.8
175	83.8	83.7
200	95.0	95.6
225	106.7	107.5
250	118.4	119.4
275	130.1	131.4
300	141.8	143.5
325	153.6	155.5
350	165.3	167.6
375	177.0	179.7
400	188.8	191.8
425	200.6	204.0
450	212.4	216.1
475	224.1	228.3
500	235.9	240.5
525	247.7	252.8
550	259.5	265.0
575	271.3	277.2
600	283.1	289.5
625	294.9	301.8
650	306.7	314.1
675	318.4	326.4
700	330.2	338.7
725	342.0	351.0
750	353.8	363.4
775	365.5	375.7
800	377.4	388.1
825	389.2	400.5
850	400.9	412.9
875	412.7	425.3
900	424.5	437.7
925	436.3	450.1
950	448.1	462.5
975	459.9	474.9
1000	471.7	487.4
1024	483.5	499.8
1050	495.2	512.3
1075	507.0	524.8
1100	518.8	537.2
1125	530.6	549.7
1150	542.4	562.2
1175	554.2	574.7
1200	566.0	587.2
1225	577.8	599.7
1250	589.9	612.2
1275	601.3	624.8
1300	613.1	637.3
Over 1300	Saybolt Furol Seconds = Centistokes x 0.4717	Log (Saybolt Furol Seconds - 2.87) = 1.0276 [Log (Centistokes)] - 0.3975

Equivalents of Kinematic and Saybolt Universal Viscosity

Kinematic Viscosity, Centistokes ν	Equivalent Saybolt Universal Viscosity, Sec	
	At 100°F (37.8°C) Basic Values	At 210°F (99°C)
1.83	32.01	32.23
2.0	32.62	32.85
4.0	39.14	39.41
6.0	45.56	45.88
8.0	52.09	52.45
10.0	58.91	59.32
15.0	77.39	77.93
20.0	97.77	98.45
25.0	119.3	120.1
30.0	141.3	142.3
35.0	163.7	164.9
40.0	186.3	187.6
45.0	209.1	210.5
50.0	232.1	233.8
55.0	255.2	257.0
60.0	278.3	280.2
65.0	301.4	303.5
70.0	324.4	326.7
75.0	347.6	350.0
80.0	370.8	373.4
85.0	393.9	396.7
90.0	417.1	420.0
95.0	440.3	443.4
100.0	463.5	466.7
120.0	556.2	560.1
140.0	648.9	653.4
160.0	741.6	
180.0	834.2	
200.0	926.9	
220.0	1019.6	
240.0	1112.3	
250.0	1205.0	
280.0	1297.7	
300.0	1390.4	
320.0	1483.1	
340.0	1575.8	
360.0	1668.5	
380.0	1761.2	
400.0	1853.9	
420.0	1946.6	
440.0	2039.3	
460.0	2132.0	
480.0	2224.7	
500.0	2317.4	
Over 500	Saybolt Seconds = Centistokes x 4.6347	Saybolt Seconds = Centistokes x 4.6673

Note: To obtain the Saybolt Universal viscosity equivalent to a kinematic viscosity determined at ν , multiply the equivalent Saybolt Universal viscosity at 100°F (37.8°C) by $1 + (\nu - 100) 0.000 064$.

For example, 10 ν at 210°F (99°C) are equivalent to 58.91 multiplied by 1.0070 or 59.32 sec Saybolt Universal at 210°F (99°C).

These tables are reprinted with the permission of the American Society for Testing Materials (ASTM). The table at the left was abstracted from Table 1, D2161-63T. The table at the right was abstracted from Table 3, D2161-63T.

Equivalents: Pressure and Head

To convert from one set of units to another, locate the given unit in the left hand column, and multiply the numerical value by the factor shown horizontally to the right, under the set of units desired.

TO OBTAIN MULTIPLY BY	lb/in. ²	lb/ft. ²	Atmospheres	kg/cm ²	kg/m ²	in. water (68°F)*	ft. water (68°F)*	in. mercury (32°F)†	mm mercury (32°F)†	Bars ‡	Mega-Pascals (MPa)‡	kPa	mm water (68°F)
lb/in. ²	1	144.0	0.068046	0.070307	703.070	27.7300	2.3108	2.03602	51.7149	0.068948	0.0068948	6.8948	704.342
lb/ft. ²	0.0069444	1	0.000473	0.000488	4.88243	0.019257	0.016048	0.014139	0.35913	0.0004788	0.0000479	0.04788	4.89127
Atmospheres	14.696	2116.22	1	1.0332	10332.0	407.520	33.9600	29.921	760.00	1.01325	0.101325	101.325	10351.0
kg/cm ²	14.2233	2048.16	0.96784	1	10000.0	394.41	32.868	28.959	735.558	0.98066	0.098066	98.066	10018.1
kg/m ²	0.001422	0.204816	0.0000968	0.0001	1	0.03944	0.003287	0.002896	0.073556	0.000098	0.0000098	0.0098	1.00181
in./water*	0.036062	5.1929	0.002454	0.00253	25.354	1	0.08333	0.073423	1.8649	0.002486	0.000249	0.24864	25.4
ft./water*	0.432744	62.315	0.029446	0.030425	304.249	12.0	1	0.88108	22.3793	0.29837	0.0029837	2.9837	304.800
in. mercury†	0.491154	70.7262	0.033420	0.03453	345.319	13.6197	1.1350	1	25.4	0.033864	0.0033864	3.3864	345.94
mm mercury†	0.0193368	2.78450	0.0013158	0.0013595	13.595	0.53621	0.044684	0.03937	1	0.001333	0.0001333	0.13332	13.6197
Bars‡	14.5038	2088.54	0.98692	1.01972	10197.2	402.190	33.5158	29.5300	750.061	1	0.10	100.0	10215.6
MPa‡	145.038	20885.4	9.8692	10.1972	101972.0	4021.90	335.158	295.300	7500.61	10.0	1	1000.0	102156.0
kPa	0.145038	20.8854	0.0098692	0.0101972	101.972	4.02190	0.33516	0.2953	7.50061	0.01	0.001	1	102.156
mm water column	.0014198	.20445	.0000966	.0000998	.99819	.039370	.003281	.002891	.073423	.0000979	.0000098	.0097889	1

*Water at 68°F (20°C) †mercury at 32°F (0°C) ‡MPa (MegaPascal) = 10 Bars = 1,000,000 N/m² (Newtons/meter²)

EXAMPLE:
(5 kg/cm²) (2048.16) = 10,240.8 lb./ft.²

Properties: Density and Specific Gravity of Selected Liquids

Liquid	Temperature		Density ^① lb/ft ³	Specific ^② Gravity
	°F	°C		
Acetaldehyde	64	17.8	38.9	0.8
Acetone	60	15.6	49.4	0.8
Acetic Anhydride	68	20.0	67.5	1.1
Acid, Acetic Conc.	68	20.0	65.5	1.1
Acid, Benzoic	59	15.0	79.0	1.3
Acid, Butyric, Conc.	68	20.0	60.2	1.0
Acid, Hydrochloric, 42.5%	64	17.8	92.3	1.4
Acid, Hydrocyanic	64	17.8	43.5	0.8
Acid, Nitric, Conc. Boil.	64	17.8	93.7	1.5
Acid, Ortho-phosphoric	65	18.3	114.4	1.8
Ammonia, Saturated	10	-12.2	40.9	0.7
Aniline	68	20.0	63.8	1.0
Argon	60	15.6	102.9	1.7
Asphalt	75	23.9	61.1	1.0
Beer	60	15.6	63.0	1.0
Benzene	32	0.0	56.1	0.9
Brine, 10% CaCl	32	0.0	68.1	1.1
Brine, 10% NaCl	32	0.0	67.2	1.1
Bromine	60	15.6	182.7	3.0
Bunkers C Fuel Max	60	15.6	63.3	1.0
Butane-n	60	15.6	36.4	0.6
Carbon Disulphide	32	0.0	80.6	1.3
Carbon Monoxide	60	15.6	49.9	0.8
Carbon Tetrachloride	68	20.0	99.6	1.6
China Wood Oil	60	15.6	58.8	1.0
Chloride	77	25.0	97.3	1.6
Chlorobenzene	68	20.0	69.1	1.1
Chloroform	68	20.0	92.9	1.5
Chromic Acid	60	15.6	75.5	1.2
Citric Acid	60	15.6	96.1	1.5
Cocoonat Oil	60	15.6	57.9	0.9
Corn syrup 86.4 Brix	60	15.6	91.1	1.5
Corn syrup 78.4 Brix	60	15.6	87.9	1.4
Creosote	60	15.6	66.7	1.1
Cresol, Meta	68	20.0	64.5	1.0
Decane-n	60	15.6	45.5	0.7
Diesel Fuel grade 1-D	60	15.6	51.5	0.8
Diesel Fuel grade 2-D	60	15.6	54.0	0.9
Diesel Fuel grade 4-D	60	15.6	57.3	0.9
Diphenyl	163	72.8	61.9	1.0
Distillate	60	15.6	63.0	0.9
Dowtherm A	700	371.1	45.5	0.7
Ethanol	77	25.0	48.6	0.8
Ether	77	25.0	44.7	0.7
Ethyl Acetate	68	20.0	56.1	0.9
Ethyl Alcohol	77	25.0	49.1	0.8
Ethylamine	61	16.1	42.6	0.7
Ethyl Benzene	68	20.0	53.6	0.9
Ethyl Chloride	68	20.0	78.0	1.3
Ethyl Oxide	30	-1.1	54.9	0.9
Ethylene Glycol	60	15.6	70.5	1.1
Fluorine	60	15.6	69.7	1.1
Formaldehyde	113	45.0	50.8	0.8
Formic Acid	100	37.8	56.1	0.9
Fuel 3 Max	60	15.6	56.0	0.9
Fuel 5 Min	60	15.6	60.2	1.0
Fuel 5 Max	60	15.6	61.9	1.0
Fuel 6 Min	60	15.6	61.9	1.0
Fuel Oil (Bunker C)	59	15.6	62.3	1.0
Furfural	68	20.0	72.3	1.2
Gasoline	60	15.6	46.8	0.8
Gasoline, Natural	60	15.6	42.4	0.7
Glucose	60	15.6	87.3	1.4
Glycerol (Glycerine)	122	50.0	78.6	1.3
Glycol	68	20.0	69.2	1.1
Helium	60	15.6	8.7	0.1
Heptane	68	20.0	42.7	0.7
Heptane-n	60	15.6	42.9	0.7
Hexane-n	60	15.6	41.4	0.7
Hexanol	77	25.0	50.7	0.8
Hydrofluoric Acid	60	15.6	57.4	0.9
Hydrogen Chloride	60	15.6	53.6	0.9
Hydrogen Sulfide	60	15.6	49.3	0.8
Ink, printers	60	15.6	74.8	1.2
Ionene	77	25.0	58.3	0.9
Isobutyl Alcohol	68	20.0	50.5	0.8
Isopropyl Alcohol	68	20.0	49.9	0.8
Jet Fuel, grade JP-4	60	15.6	53.0	0.7
Kerosene	60	15.6	50.8	0.8
Lard	60	15.6	59.9	1.0

Liquid	Temperature		Density ^① lb/ft ³	Specific ^② Gravity
	°F	°C		
Lard Oil	60	15.6	57.4	0.9
Linolenic Acid	77	25.0	56.3	0.9
Linseed Oil	60	15.6	58.0	0.9
M. C. Residuum	60	15.6	58.3	0.9
Mercury	20	-6.7	849.7	13.6
Mercury	40	4.4	848.0	13.6
Mercury	60	15.6	846.3	13.6
Mercury	80	26.7	844.6	13.5
Mercury	100	37.8	842.9	13.5
Methane	-2.66	-16.3	29.1	0.5
Methyl Alcohol	77	25.0	49.2	0.8
Methylene Chloride	68	20.0	83.4	1.3
Methyl Ethyl Ketone	72	22.2	49.9	0.8
Methyl Propyl	58	14.4	50.5	0.8
Milk	60	15.6	64.8	1.0
Mineral Oil	80	26.7	56.1	0.9
Naphtha, Petroleum	59	15.0	41.6	0.7
Naphtha, Wood	77	25.0	43.7	0.7
Naphthalene	77	25.0	60.1	1.0
Nonane-n	60	15.6	64.8	1.0
Nonanol	77	25.0	51.3	0.8
Ocimene	77	25.0	49.9	0.8
Octane-n	60	15.6	44.1	0.7
Oil, Olive	69	15.0	57.3	0.9
Palmitic Acid	77	25.0	53.2	0.9
Pentane	59	15.0	38.9	0.6
Petroleum Ether	60	15.6	39.9	0.6
Phenol	77	25.0	66.8	1.1
Phosgene	32	0	86.1	1.4
Phosphorus	93	33.9	108.5	1.7
Propane	0	-17.7	30.1	0.5
Propanol	77	25.0	50.3	0.8
Propyl Alcohol	77	25.0	50.0	0.8
Propylene	77	25.0	32.2	0.5
Propylene Glycol	77	25.0	60.4	1.0
Pyridine	68	20.0	61.3	1.0
Resorcinol	77	25.0	79.3	1.3
Rosin Oil	60	15.6	61.1	1.0
Sabiname	77	25.0	50.8	0.8
SAE 10 Lube	60	15.6	54.6	0.9
SAE 30 Lube	60	15.6	56.0	0.9
SAE 70 Lube	60	15.6	57.1	0.9
Salt Creek Crude	60	15.6	53.8	0.9
Silane	77	25.0	44.8	0.7
Sorbaldehyde	77	25.0	56.0	0.9
Sperm Oil	60	15.6	86.7	1.4
Starch	60	15.6	93.6	1.5
Stearic Acid	77	25.0	58.7	0.9
Styrene	77	25.0	56.5	0.9
Sucrose 60 Brix	60	15.6	80.5	1.3
Sucrose 76 Brix	60	15.6	86.7	1.4
Sulphur Dioxide	32	0.0	89.2	1.4
Sulphuric Acid	68	20.0	116.0	1.9
Sulphuric Acid	60	15.6	114.1	1.8
Sulphur Trioxide	70	21.1	119.8	1.9
32.6° API Crude	60	15.6	53.8	0.9
35.6° API Crude	60	15.6	52.8	0.8
40° API Crude	60	15.6	51.4	0.8
48° API Crude	60	15.6	49.2	0.8
Tar, Road RT-4	60	15.6	67.4	1.1
Tar, Road RT-8	60	15.6	70.5	1.1
Tar, Road RT-12	60	15.6	71.7	1.2
Terpinene	212	100.0	53.0	0.9
Toluene (Toluol)	68	20.0	54.1	0.9
Transmission Oil	80	26.7	58.6	0.9
Trichloroethylene	68	20.0	91.5	1.5
Turpentine	60	15.6	53.9	0.9
Varnish, spar	60	15.6	56.1	0.9
Vegetable Oil	60	15.6	56.8	0.9
Water	60	15.6	62.4	1.0
Water	100	37.8	61.9	1.0
Water, Distilled	70	21.1	61.7	1.0
Water, sea	60	15.6	64.2	1.0
Whale Oil	60	15.6	57.7	0.9
Xylol (Xylene)	68	20.0	55.0	0.9

① Density is shown for the temperature listed.

② Specific gravity uses water at 60°F as base conditions.

Properties: Density and Specific Gravity of Selected Gases

Gas	Chemical Formula	Molecular Weight	Density ^① lb/ft ³	Density ^② kg/m ³	Specific ^② Gravity	Critical Temperature
Acetylene	C ₂ H ₂	26.04	0.0673	1.1459	0.899	95
Air	–	28.96	0.0748	1.2740	1.000	-220
Ammonia	NH ₃	17.03	0.0440	0.7491	0.588	270
Argon	Ar	39.95	0.1032	1.7572	1.379	-188
Bio Gas (65% Methane, 35% CO ₂)	–	25.83	0.0668	1.1363	0.892	-116
Butane-N	C ₄ H ₁₀	58.12	0.1502	2.5567	2.007	305
Butylene	C ₄ H ₈	56.11	0.1450	2.4681	1.937	306
Carbon Dioxide	CO ₂	44.11	0.1137	1.9359	1.520	90
Carbon Monoxide	CO	28.01	0.0724	1.2321	0.967	-222
Chlorine	Cl ₂	70.91	0.1833	3.1205	2.499	291
Ethane	C ₂ H ₆	30.07	0.0777	1.3227	1.038	90
Ethylene	C ₂ H ₄	28.05	0.0725	1.2340	0.969	49
Helium	He	4.00	0.0103	0.1761	0.138	-450
Hexane, Average	C ₆ H ₁₄	86.18	0.2227	3.7908	2.976	454
Hydrogen	H ₂	2.02	0.0052	0.0887	0.070	-402
Hydrogen Sulfide	H ₂ S	34.08	0.0881	1.4997	2.125	213
Methane	CH ₄	16.04	0.0415	0.7057	0.554	-117
Nitric Oxide	NO	30.00	0.0776	1.3202	1.071	-135
Nitrogen	N ₂	28.01	0.0724	1.2323	0.967	-233
Nitrous Oxide	N ₂ O	44.01	0.1138	1.9367	1.376	98
Oxygen	O ₂	32.00	0.0827	1.4076	1.105	246
Pentane	C ₅ H ₁₂	72.15	0.1865	3.1738	2.491	368
Propane	C ₃ H ₈	44.10	0.1140	1.9397	1.523	206
Propylene	C ₃ H ₆	42.08	0.1088	1.8510	1.453	198
Sulphur Dioxide	SO ₂	64.06	0.1656	2.8191	2.213	316

① Density is given for gas at 14.7 psia @ +70° F.

② Density is given for gas at 1 bar @ +0° C.

Properties: Density and Specific Gravity of Saturated Water

Temperature		Pressure PSI	Density lbs/ft ³	S.G.	Dielectric Constant Of Liquid	Dielectric Constant Of Vapor	Error in Distance, %
°F	°C						
32	0	0.09	62.42	1.00	—	—	—
35	2	0.10	62.42	1.00	—	—	—
40	4	0.12	62.42	1.00	—	—	—
45	7	0.15	62.42	1.00	—	—	—
50	10	0.18	62.42	1.00	—	—	—
52	11	0.19	62.38	1.00	—	—	—
54	12	0.21	62.38	1.00	—	—	—
56	13	0.22	62.38	1.00	—	—	—
58	14	0.24	62.38	1.00	—	—	—
60	16	0.26	62.34	1.00	—	—	—
62	17	0.28	62.34	1.00	—	—	—
64	18	0.30	62.34	1.00	—	—	—
66	19	0.32	62.34	1.00	—	—	—
68	20	0.34	62.31	1.00	—	—	—
70	21	0.36	62.31	1.00	—	—	—
72	22	0.39	62.27	1.00	—	—	—
74	23	0.42	62.27	1.00	—	—	—
76	24	0.45	62.27	1.00	—	—	—
78	26	0.48	62.23	1.00	—	—	—
80	27	0.51	62.23	1.00	—	—	—
82	28	0.54	62.19	1.00	—	—	—
84	29	0.58	62.19	1.00	—	—	—
86	30	0.62	62.15	1.00	—	—	—
88	31	0.66	62.15	1.00	—	—	—
90	32	0.70	62.11	1.00	—	—	—
92	33	0.74	62.07	0.99	—	—	—
94	34	0.79	62.07	0.99	—	—	—
96	36	0.84	62.03	0.99	—	—	—
98	37	0.89	62.03	0.99	—	—	—
100	38	0.95	62.00	0.99	73.95	1.001	0.0
110	43	1.28	61.84	0.99	72.09	1.001	0.0
120	49	1.70	61.69	0.99	70.27	1.001	0.0
130	54	2.23	61.54	0.99	68.50	1.001	0.0
140	61	2.89	61.39	0.98	66.77	1.001	0.0
150	66	3.72	61.20	0.98	65.09	1.002	0.1
160	71	4.74	60.98	0.98	63.44	1.002	0.1
170	77	6.00	60.79	0.97	61.84	1.003	0.1
180	82	7.52	60.57	0.97	60.28	1.003	0.1
190	88	9.34	60.35	0.97	58.75	1.004	0.2
200	92	11.53	60.13	0.96	57.26	1.005	0.2


Temperature		Pressure PSI	Density lbs/ft ³	S.G.	Dielectric Constant Of Liquid	Dielectric Constant Of Vapor	Error in Distance, %
°F	°C						
210	99	14.13	59.88	0.96	55.81	1.006	0.3
212	100	14.70	59.81	0.96	—	—	—
220	104	17.19	59.63	0.96	54.40	1.007	0.3
230	110	20.78	59.35	0.95	53.02	1.008	0.4
240	116	24.97	59.10	0.95	51.67	1.009	0.4
250	121	29.82	58.82	0.94	50.36	1.011	0.5
260	127	35.42	58.55	0.94	49.08	1.013	0.6
270	132	41.83	58.24	0.93	47.83	1.015	0.7
280	138	49.18	57.94	0.93	46.61	1.017	0.8
290	143	57.53	57.64	0.92	45.42	1.019	0.9
300	149	66.98	57.31	0.92	44.26	1.022	1.1
310	154	77.64	56.98	0.91	43.13	1.025	1.2
320	160	89.60	56.66	0.91	42.02	1.028	1.4
330	166	103.00	56.34	0.90	40.94	1.032	1.6
340	171	117.93	55.96	0.90	39.88	1.036	1.8
350	177	134.53	55.59	0.89	38.84	1.040	2.0
360	182	152.92	55.22	0.88	37.83	1.045	2.2
370	188	173.23	54.85	0.88	36.84	1.050	2.5
380	193	195.60	54.47	0.87	35.88	1.056	2.8
390	199	220.20	54.05	0.87	34.93	1.062	3.1
400	204	247.10	53.65	0.86	34.00	1.069	3.4
410	210	276.50	53.25	0.85	33.09	1.076	3.7
420	216	308.50	52.80	0.85	32.20	1.085	4.2
430	221	343.30	52.38	0.84	31.32	1.093	4.5
440	227	381.20	51.92	0.83	30.46	1.103	5.0
450	232	422.10	51.47	0.82	29.62	1.113	5.5
460	238	466.30	50.99	0.82	28.78	1.124	6.0
470	243	514.10	50.51	0.81	27.97	1.137	6.6
480	249	565.50	50.00	0.80	27.16	1.150	7.2
490	254	620.70	49.48	0.79	26.36	1.164	7.9
500	260	680.00	48.95	0.78	25.58	1.180	8.6
520	271	811.40	47.82	0.77	24.04	1.216	10.3
540	282	961.50	46.62	0.75	22.52	1.260	12.2
560	293	1131.80	45.31	0.73	21.03	1.313	14.6
580	304	1324.30	43.90	0.70	19.54	1.378	17.4
600	316	1541.00	42.32	0.68	18.04	1.461	20.9
620	327	1784.40	40.57	0.65	16.52	1.570	25.3
640	338	2057.10	38.57	0.62	14.93	1.719	31.1
660	349	2362.00	36.14	0.58	13.23	1.938	39.2
680	360	2705.00	32.98	0.53	11.23	2.310	52.0
700	371	3090.00	27.28	0.44	8.29	3.295	81.5
705	374	3204.00	19.79	0.32	—	—	—

Properties: Density of Superheated Steam and Compressed Water

Temperature		Superheated Steam and Compressed Water Density lbm/ft ³										
°F	°C	1 PSIA	2 PSIA	5 PSIA	10 PSIA	20 PSIA	50 PSIA	100 PSIA	200 PSIA	500 PSIA	750 PSIA	1000 PSIA
32	0	62.42	62.42	62.42	62.42	62.42	62.42	62.42	62.46	62.54	62.58	62.62
40	4	62.42	62.42	62.42	62.42	62.42	62.42	62.42	62.46	62.54	62.58	62.62
60	16	62.37	62.37	62.37	62.37	62.37	62.37	62.37	62.42	62.46	62.50	62.58
80	27	62.23	62.23	62.23	62.23	62.23	62.23	62.23	62.27	62.31	62.38	62.42
100	38	62.00	62.00	62.00	62.00	62.00	62.00	62.00	62.04	62.07	62.15	62.19
120	49	.002901	61.73	61.73	61.73	61.73	61.73	61.73	61.77	61.81	61.84	61.88
140	60	.002804	.005619	61.39	61.39	61.39	61.39	61.39	61.43	61.46	61.50	61.58
160	71	.002713	.005435	60.98	60.98	61.01	61.01	61.01	61.01	61.09	61.13	61.20
180	82	.002628	.005263	.01321	60.55	60.57	60.57	60.57	60.61	60.68	60.72	60.75
200	93	.002548	.005101	.01280	.02575	60.10	60.13	60.13	60.13	60.21	60.24	60.31
220	104	.002472	.004950	.01241	.02495	59.59	59.60	59.60	59.67	59.70	59.77	59.81
240	116	.002402	.004807	.01205	.02420	.04885	59.10	59.10	59.10	59.17	59.24	59.28
260	127	.002334	.004672	.01171	.02351	.04738	58.51	58.55	58.55	58.62	58.69	58.72
280	138	.002271	.004545	.01139	.02285	.04602	57.94	57.94	57.97	58.04	58.07	58.14
300	149	.002211	.004425	.01108	.02223	.04473	.1140	57.31	57.34	57.41	57.57	57.54
320	160	.002154	.004311	.01079	.02165	.04352	.1107	56.63	56.66	56.75	56.82	56.88
340	171	.002100	.004203	.01052	.02109	.04239	.1076	.2213	55.96	56.05	56.12	56.18
360	182	.002049	.004100	.01026	.02057	.04131	.1047	.2146	55.22	55.31	55.40	55.46
380	193	.002000	.004002	.01002	.02007	.04029	.1019	.2084	54.47	54.56	54.65	54.71
400	204	.001954	.003908	.009781	.01960	.03933	.09938	.2026	.4238	53.74	53.82	53.91
420	216	.001909	.003819	.009557	.01914	.03841	.09696	.1973	.4104	52.88	52.97	53.08
440	227	.001866	.003734	.009343	.01871	.03753	.09466	.1923	.3982	51.98	52.08	52.17
460	238	.001826	.003653	.009139	.01830	.03670	.09249	.1876	.3870	50.99	51.13	51.23
480	249	.001787	.003575	.008944	.01791	.03590	.09042	.1832	.3766	1.049	50.08	50.20
500	260	.001750	.003500	.008756	.01753	.03514	.08845	.1790	.3670	1.008	48.97	49.12
520	271	.001714	.003429	.008576	.01717	.03441	.08657	.1750	.3580	.9728	1.603	47.94
540	282	.001680	.003360	.008405	.01682	.03371	.08477	.1712	.3496	.9413	1.530	46.64
560	293	.001647	.003294	.008239	.01649	.03304	.08305	.1676	.3416	.9128	1.468	2.142
580	304	.001615	.003230	.008080	.01617	.03240	.08140	.1642	.3341	.8870	1.415	2.035
600	316	.001585	.003169	.007927	.01587	.03178	.07982	.1609	.3270	.8633	1.367	1.947
620	327	.001555	.003111	.007780	.01557	.03119	.07830	.1577	.3202	.8413	1.325	1.871
640	338	.001527	.003054	.007638	.01529	.03061	.07683	.1547	.3137	.8209	1.287	1.804
660	349	.001499	.002999	.007501	.01501	.03006	.07543	.1518	.3076	.8019	1.252	1.746
680	360	.001473	.002947	.007369	.01475	.02953	.07408	.1490	.3017	.7840	1.219	1.693
700	371	.001448	.002896	.007242	.01449	.02902	.07278	.1464	.2960	.7671	1.189	1.645
720	382	.001423	.002847	.007119	.01425	.02852	.07152	.1438	.2906	.7510	1.161	1.601
740	393	.001400	.002799	.007000	.01401	.02804	.07030	.1413	.2854	.7359	1.135	1.560
760	404	.001376	.002753	.006885	.01378	.02758	.06913	.1389	.2804	.7215	1.111	1.523
780	416	.001354	.002709	.006774	.01355	.02713	.06800	.1366	.2755	.7077	1.087	1.488
800	427	.001333	.002666	.006666	.01334	.02670	.06690	.1344	.2709	.6946	1.065	1.455
820	438	.001312	.002624	.006562	.01313	.02628	.06584	.1322	.2664	.6820	1.045	1.424
840	449	.001292	.002584	.006461	.01293	.02587	.06482	.1301	.2621	.6700	1.025	1.394
860	460	.001272	.002545	.006363	.01273	.02548	.06382	.1281	.2579	.6584	1.006	1.367
880	471	.001253	.002507	.006268	.01254	.02509	.06286	.1261	.2539	.6473	.9877	1.340
900	482	.001235	.002470	.006175	.01235	.02472	.06192	.1242	.2500	.6366	.9703	1.315
920	493	.001217	.002434	.006086	.01217	.02436	.06101	.1224	.2462	.6263	.9537	1.291
940	504	.001199	.002399	.005998	.01200	.02401	.06013	.1206	.2425	.6163	.9377	1.269
960	516	.001182	.002365	.005914	.01183	.02367	.05928	.1187	.2389	.6068	.9223	1.247
980	527	.001166	.002332	.005832	.01167	.02334	.05845	.1172	.2355	.5976	.9075	1.226
1000	538	.001150	.002300	.005752	.01151	.02302	.05764	.1155	.2321	.5885	.8933	1.206
Saturated Steam		.002998	.005755	.01360	.02603	.04978	.1175	.2257	.4372	1.078	1.641	2.242
Saturated Water		61.96	61.61	60.94	60.28	59.42	57.90	56.37	54.38	50.63	48.33	46.32
Tsat °F		101.74	126.07	162.24	193.21	227.96	281.02	327.82	381.80	467.01	510.84	544.58

Temperature Relationship for Petroleum Oils

(Reproduced by permission from the Oil and Gas Journal)

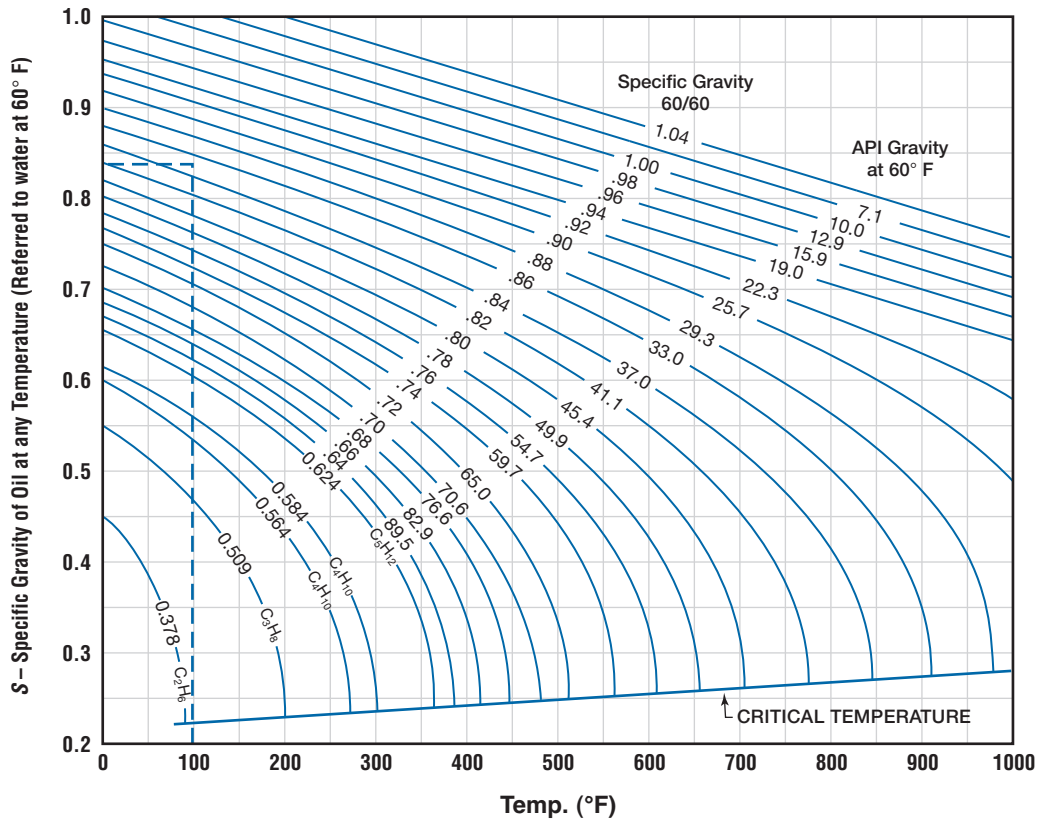

- C_2H_6 = Ethane
- C_3H_8 = Propane
- C_4H_{10} = Butane
- iC_4H_{10} = Isobutane
- iC_5H_{12} = Isopentane


Example: The specific gravity of an oil at 60°F is 0.85. The specific gravity at 100°F = 0.83.

To find the weight density of a petroleum oil at its flowing temperature when the specific gravity at 60°F is known, multiply the specific gravity of the oil at flowing temperature (see chart above) by 62.4, the density of water at 60°F.

*Reprinted from Crane Company's Technical Paper 410.

Specific Gravity versus API Gravity

(for hydrocarbon based products and water gravity °A.P.I.)

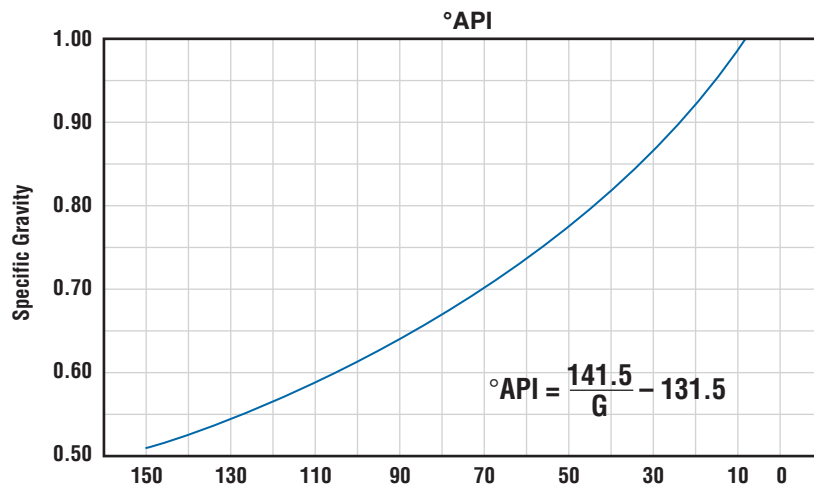

Properties: Density of Air

Temperature		Air Density lbm/ft ³											
°F	°C	14.73 PSIA	100 PSIA	200 PSIA	300 PSIA	400 PSIA	500 PSIA	600 PSIA	700 PSIA	800 PSIA	900 PSIA	1000 PSIA	1100 PSIA
-40	-40	0.0949	0.6488	1.3087	1.9796	2.661	3.3525	4.0533	4.7628	5.4768	6.2031	6.9315	7.6632
-20	-29	0.0905	0.6182	1.245	1.8799	2.5227	3.1728	3.8295	4.492	5.1594	5.8308	6.5051	7.1811
0	-18	0.0866	0.5905	1.1875	1.7906	2.3995	3.0135	3.6321	4.2547	4.8805	5.5086	6.1382	6.7684
20	-7	0.0830	0.5652	1.1353	1.71	2.2887	2.8711	3.4567	4.0447	4.6347	5.2258	5.8175	6.409
40	4	0.0797	0.5421	1.0878	1.6368	2.1886	2.7429	3.2992	3.857	4.4157	4.9748	5.5338	6.092
60	16	0.0765	0.5208	1.0442	1.5699	2.0974	2.6266	3.1569	3.6879	4.2191	4.7502	5.2805	5.8098
80	27	0.0737	0.5012	1.0041	1.5085	2.0141	2.5205	3.0275	3.5347	4.0416	4.5478	5.0529	5.5567
100	38	0.0711	0.4829	0.9670	1.4519	1.9375	2.4234	2.9093	3.3949	3.8798	4.3637	4.8464	5.3274
120	49	0.0687	0.4660	0.9327	1.3997	1.8668	2.3339	2.8006	3.2666	3.7316	4.1954	4.6577	5.1184
140	60	0.0664	0.4503	0.9007	1.3511	1.8013	2.2511	2.7001	3.1482	3.5951	4.0406	4.4845	4.9265
160	71	0.0641	0.4356	0.871	1.3061	1.7406	2.1744	2.6073	3.0391	3.4695	3.8985	4.3257	4.7509
180	82	0.0621	0.4218	0.8432	1.264	1.684	2.103	2.521	2.938	3.3529	3.7665	4.1783	4.5882
200	93	0.0602	0.4089	0.8171	1.2246	1.6311	2.0364	2.4405	2.8432	3.2444	3.6439	4.0417	4.4375
220	104	0.0585	0.3967	0.7927	1.1877	1.5815	1.9741	2.3654	2.7551	3.1432	3.5296	3.9144	4.2972
240	116	0.0568	0.3853	0.7697	1.1529	1.5349	1.9156	2.2948	2.6725	3.0485	3.4228	3.7953	4.1658
260	127	0.0552	0.3745	0.7480	1.1202	1.4911	1.8606	2.2288	2.5956	2.9608	3.3239	3.6846	4.0424
280	138	0.0537	0.3644	0.7275	1.0893	1.4497	1.8088	2.1666	2.5231	2.8779	3.2306	3.4803	3.9264
300	149	0.0523	0.3547	0.7081	1.0601	1.4107	1.7599	2.1078	2.4546	2.7997	3.1424	3.4819	3.8174
320	160	0.0510	0.3456	0.6898	1.0325	1.3737	1.7136	1.9997	2.3897	2.7256	3.059	3.389	3.7147
340	171	0.0497	0.3369	0.6724	1.0063	1.3388	1.6698	2.0523	2.6553	2.98	3.3013	3.6184	

Properties: Speed of Sound

Gases	m/sec	ft/sec
air, dry	331	1086
ammonia	415	1362
argon	308	1010
carbon dioxide	259	850
carbon monoxide	338	1109
chlorine	206	676
deuterium	890	2920
ethane	308	1010
ethylene	317	1040
helium	965	3166
hydrogen	1284	4213
hydrogen bromide	200	656
hydrogen chloride	206	676
hydrogen iodide	157	515
hydrogen sulfide	289	948
illuminating (coal gas)	453	1486
methane	430	1411
neon	435	1427
nitric oxide	324	1063
nitrogen	334	1096
nitrous oxide	263	863
oxygen	316	1037
sulfur dioxide	213	699

Vapors	m/sec	ft/sec
acetone	230	755
benzene	202	663
carbon tetrachloride	145	476
chloroform	171	561
ethanol	269	883
ethyl ether	206	676
methanol	335	1099
water	494	1621

Note: the speed of sound in gases is measured at 32°F (0°C) except ethane and nitric oxide which is measured at 50°F (10°C). The speed of sound in vapors is measured at 206°F (97°C) except water which is measured at 270°F (134°C).

Properties: Dielectric Constants of Liquids

This listing contains dielectric values for the most commonly used materials. This information can be used to help select a probe, establish how much capacitance information your particular application will develop, or determine the effect of a coating on the probe.

Liquids	Temperature		Dielectric Constant
	°F	°C	
Acenaphthene	70	21	3.0
Acetal	70	21	3.6
Acetaldehyde	50	10	22.2
Acetaldoxime	70	21	3.4
Acetamide	68	20	4.0
Acetanilide	71	22	2.9
Acetic Acid	65	18	6.1
Acetic Anhydride	70	21	22.0
Acetone	75	24	20.7
Acetone	80	27	20.7
Acetone	130	54	17.7
Acetonitrile	70	21	37.5
Acetophenone	75	24	17.3
Acetoxime	75	24	3.0
Acetylacetone	68	20	23.1
Acetyl bromide	68	20	16.5
Acetylchloride	68	20	15.8
Acetylmethyl Hexyl Ketone	66	19	27.9
Acrylic Resin	70	20	3.0
Aliphatic Amine	195	90	7.2
Allyl Alcohol	70	21	21.0
Allyl Bromide	66	19	7.0
Allyl Chloride	68	20	8.2
Allyl Iodide	66	19	6.1
Allyl Isothiocyanate	64	18	17.5
Alluminum Bromide	212	100	3.4
Alluminum Oleate	68	20	2.4
Alox 600	130	54	4.1
Aminox	275	135	2.4
Ammonia	-30	-34	22.4
Ammonia	-104	-75	25.0
Ammonia	75	24	16.9
Ammonia, Aqueous	70	21	16.8
Amyl Acetate	68	20	5.0
Amyl Alcohol	-180	-118	35.5
Amyl Alcohol	68	20	15.8
Amyl Alcohol	140	60	11.2
Amylamine	72	22	4.6
Amyl Benzoate	68	20	5.1
Amyl Bromide	50	10	6.3
Amyl Chloride	52	11	6.6
Amylene	70	21	2.0
Amylene Bromide	58	14	5.6
Amyl Ether	60	16	3.1
Amyl Formate	66	19	5.7
Amyl Iodide	62	17	6.9
Amylmercaptan	68	20	4.7
Amyl Nitrate	62	17	9.1
Amyl Thiocyanate	68	20	17.4
Aniline	32	0	7.8
Aniline	68	20	7.3
Aniline	212	100	5.5
Anisaldehyde	68	20	15.8
Anisoldoxine	145	63	9.2
Anisole	68	20	4.3
Antimony Pentachloride	68	20	3.2
Antimony Tribromide	212	100	20.9
Antimony Trichloride	166	74	33.0
Antimony Tricodide	347	175	13.9
Arsenic Tribromide	98	37	9.0

Non-conductive materials are those with dielectric values less than 10. Conductive materials are those with dielectric values greater than 10.

Liquids	Temperature		Dielectric Constant
	°F	°C	
Arsenic Trichloride	70	21	12.4
Arsenic Triiodide	302	150	7.0
Arsine	-58	-50	2.7
Asphalt	75	24	2.7
Azoxyanisole	122	50	2.3
Azoxybenzene	104	40	5.1
BPA	68	20	5.0
Beef Talo	70	21	2.8
Benzal Chloride	68	20	6.9
Benzaldehyde	68	20	17.0
Benzaldoxime	68	20	3.8
Benzene	68	20	2.3
Benzil	202	95	13.0
Benzonitrile	68	20	26.0
Benzonitrile	160	71	22.0
Benzophenone	68	20	13.0
Benzophenone	122	50	11.4
Benzotrichloride	68	20	7.4
Benzoylacetone	68	20	3.8
Benzoyl Chloride	158	70	22.1
Benzoyl Chloride	75	24	19.0
Benzyl Acetate	70	21	5.0
Benzyl Alcohol	68	20	13.0
Benzylamine	68	20	4.6
Benzyl Benzoate	68	20	4.8
Benzyl Chloride	68	20	6.4
Benzyl Cyanide	68	20	18.3
Benzyl Ethylamine	68	20	4.3
Benzyl Methylamine	67	19	4.4
Benzyl Salicylate	68	20	4.1
Bornyl Acetate	70	21	4.6
Boron Bromide	32	0	2.6
Boronyl Chloride	202	95	5.2
Bromal	70	21	7.6
Bromocotyl Bromide	68	20	12.6
Bromohexadecane	76	24	3.7
Bromine	68	20	3.1
Bromo-2-Ethoxyheptane	68	20	5.5
Bromoaniline	66	19	13.0
Bromoanisole	86	30	7.1
Bromobenzene	68	20	5.4
Bromobutylene	68	20	5.8
Bromobutyric Acid	68	20	7.2
Bromodecane	76	24	4.4
Bromodocosane	130	54	3.1
Bromododocane	76	24	4.1
Bromo-2-Othoxypentane	76	24	6.5
Bromoform	68	20	4.4
Bromoheptane	76	24	5.3
Bromohexane	76	24	5.8
Bromolsovoleric Acid	68	20	6.5
Bromonaphtholene	66	19	5.1
Bromooctodecane	86	30	3.5
Bromopentaecane	68	20	3.9
Bromopropionic Acid	68	20	11.0
Bromotoluene	68	20	5.1
Bromotridecane	50	10	4.2
Bromoundecane	15	-9	4.7
Butadiene	77	25	2.4
Butane	30	-1	1.4
N-Butylacetate	66	19	5.1

Properties: Dielectric Constants of Liquids (cont.)

Liquids	Temperature		Dielectric Constant
	°F	°C	
Iso-Butylacetate	68	20	5.6
Iso-Butylamine	70	21	4.5
N-Butyl Alcohol	66	19	7.8
Iso-Butyl Alcohol	112	45	31.7
Iso-Butyl Alcohol	32	0	20.5
Iso-Butyl Alcohol	68	20	18.7
Butylomine	70	21	5.4
N-Butyl Bromide	68	20	6.6
Butyl Chlorol	64	18	10.0
Butyl Chloride	68	20	9.6
N-Butyl Formate	317	158	2.4
N-Butyl Iodide	77	25	6.1
Iso-Butyl Iodide	68	20	5.8
Iso-Butyl Nitrate	66	19	11.9
Butyric Anhydride	68	20	12.0
Butyroldehyda	79	26	13.4
Butyric Acid	68	20	2.8
N-Butyricacid	68	20	2.9
Iso-Butyric Acid	68	20	2.7
Butyric Anhydride	68	20	12.9
Butyronitrile	70	21	20.7
Iso-Butyronitrile	75	24	20.8
Cable Oil	75	24	2.2
Camphanedione	398	203	16.0
Camphene	68	20	2.7
Camphorpinacane	68	20	3.6
Caproic Acid	160	71	2.6
Caprolactum	180	82	13.1
Caprylic Acid	65	18	3.2
Carbon Dioxide	32	0	1.6
Carbon Dioxide	-110	-80	2.1
Carbon Disulfide	68	20	2.6
Carbon Tetrachloride	68	20	2.2
Carvenone	68	20	18.4
Carveol	64	18	11.2
Carvone	71	22	11.0
Castor Oil	58	14	4.8
Castor Oil	75	24	2.6
Camphene	104	40	2.3
Camphoric Imide	480	249	5.5
Cetyl Iodide	68	20	3.3
Chloral Hydrate	59	15	5.5
Chloroctic Acid	140	60	12.3
Chlorine	32	0	2.0
Chloroocelle Acid	68	20	21.0
Chloroacetone	68	20	29.8
Chlorobenzene	68	20	5.9
Chlorobenzene	212	100	4.7
Chlorocyclohexane	76	24	7.6
Chloroheptane	71	22	5.5
Chloroform	32	0	5.5
Chloroheptane oxime	192	89	3.0
Chlorohydrate	68	20	3.3
Chloronophtholene	76	24	5.0
O-Chlorophenol	66	19	8.2
3-Chloro-1, Dihydroprone	68	20	31.0
Chlorooctane	76	24	5.1
Chlorotoluene	68	20	4.7
Cholestrol	80	27	2.9
Chorine	170	77	1.7
Chromyl Chloride	68	20	2.6
Cis-3-Hexene	76	24	2.1
Cinnamaldehyde	75	24	16.9
Citraconic Anhydride	68	20	40.3
Cocaine	68	20	3.1
Copper Oleate	68	20	2.8
Creosol	62	17	10.6
O-Cresol	75	24	5.8
M-Cresol	75	24	5.0
P-Cresol	75	24	5.6

Liquids	Temperature		Dielectric Constant
	°F	°C	
Cresol	75	24	5.0
Crisco Oil	130	54	2.2
Crotonic Nitric	68	20	28.0
Cumaldehyde	59	15	11.0
Cumene	68	20	2.4
Cumicaldehyde	58	14	10.7
Cupric Oxide	60	16	18.1
Cyanoacetic Acid	40	4	33.0
Cyanoethyl Acetate	68	20	19.3
Cyanogen	73	23	2.6
Cyclohedane	68	20	2.0
Cyclohexane	68	20	2.0
Cyclohexanecarboxylic Acid	88	31	2.6
Cyclohexanone oxime	192	89	3.0
Cyclohexanemethanol	140	60	9.7
Cyclohexanone	68	20	18.2
Cyclohexylomine	-5	-21	5.3
Cyclohexylphenol	130	54	4.0
Cyclohexyltrifluoromethane	-120	-84	11.0
Cyclohexanol	77	25	15.0
Cyclopentane	68	20	2.2
P-Cymene	63	17	2.3
Cymene	62	17	2.3
Decahydronaphthalene	68	20	2.2
Decamethylcyclopentasiloxane	68	20	2.5
Decamethyltetrasiloxane	68	20	2.4
Decane	68	20	2.0
Decane	340	171	1.8
Decylene	62	17	2.7
Decyne	68	20	2.2
Decanol	68	20	8.1
Deuterium	68	20	1.3
Deuterium Oxide	76	24	78.3
Diacetoxybutane	76	24	6.6
Diallyl Sufide	68	20	4.9
Dibenzyl Sebacate	68	20	4.6
Dibroheptane	24	-4	5.1
Dibromobenzene	68	20	8.8
P-Dibromobenzene	190	88	4.5
Dibromobutane	68	20	5.7
Dibromoethylene	32	0	7.7
Dibromomethane	50	10	7.8
Dibromoheptane	76	24	5.1
Dibromohexane	76	24	5.0
Dibromopropane	68	20	4.3
Dibromopropyl Alcohol	70	21	9.1
Dibenzylomine	68	20	3.6
Dibutyl phtolote	86	30	6.4
Dibutyl tartrote	109	43	9.4
Dichloroctic Acid	68	20	10.7
Dibutyl sebacote	86	30	4.5
Dichlorocotone	68	20	14.0
O-Dichlorobenzone	77	25	7.5
P-Dichlorobenzone	68	20	2.9
O-Dichlorobenzene	68	20	7.5
Dichlorobenzene	127	53	2.8
1, 2-Dichloroethane	77	25	10.7
Dichloroethane	68	20	16.7
Dichlorostyrene	76	24	2.6
Dichlorotoluene	68	20	6.9
Dicyclohexyladipate	95	35	4.8
Diesel	70	21	1.9
1-Diethoxyethane	76	24	3.8
Diethyloniline	66	19	5.5
Diethyl Benzalmamate	32	0	8.0
Diethyl Di-malmate	64	18	10.2
Diethyl Disulfide	64	18	15.9
Diethyl Glutarate	86	30	6.7
Diethyl Ketone	58	14	17.3
Diethyl-L-malate	68	20	9.5

Properties: Dielectric Constants of Liquids (cont.)

Liquids	Temperature		Dielectric Constant
	°F	°C	
Diethyl Malanate	70	21	7.9
Diethylamine	68	20	3.7
Diethyl Oxalate	70	21	8.2
Diethyl Oxalacetate	66	19	6.1
Diethyl Racemote	68	20	4.5
Diethyl Sebacate	86	30	5.0
Diethyl Succinate	86	30	6.6
Diethyl Succinosuccinate	66	19	2.5
Diethyl Sulfide	68	20	7.2
Diethyl Sulfite	68	20	15.9
Diethyl Tortrate	68	20	4.5
Diethyl Disulfide	66	19	15.9
Dihydrocoroane	66	19	8.7
Dihydrocorvane	66	19	8.5
Diimylamine	64	18	2.5
Diioomylene	62	17	2.4
Diiodoethylene	180	82	4.0
Diiodomethane	76	24	5.3
Diisoomyl	62	17	2.0
Diisobutylomine	71	22	2.7
Dimethoxybenzene	73	23	4.5
Dimethylbromoethylene	68	20	6.7
Dimethyldichloro Silane	68	20	12.3
Dimethyleyclohexyomine	180	82	4.4
Dimethyloniline	68	20	4.4
Dimethyl Ethyl	68	20	11.7
Dimethyl Ethyl Carbinol	68	20	11.7
Dimethylheptane	68	20	1.9
Dimethyl-2-hexane	68	20	2.4
Dimethyl-1-Hydroxybenzene	62	17	4.8
Dimethyl Malanate	68	20	10.4
Dimethyl Oxalate	68	20	3.0
Dimethylpentane	68	20	1.9
Dimethylquinoxaline	76	24	2.3
Dimethyl Sulfide	68	20	6.3
Dimethyl Sulfate	68	20	55.0
Dimethyltoluidine	68	20	3.3
M-Dinitro Benzene	68	20	2.8
Dinitrogen Oxide	32	0	1.6
Dinitrogen Tetroxide	58	14	2.5
Diocyl phthalate	76	24	5.1
Dioxane 1,4	77	25	2.2
Dipolmitin	161	72	3.5
Dipentene	68	20	2.3
Diphenyl	166	74	2.5
Diphenylomine	125	52	3.3
Diphenylethane	230	110	2.4
Diphenyl Ether	82	28	3.9
Diphenylmethane	62	17	2.6
Dipropylomine	70	21	2.9
Dipropyl Ketone	62	17	12.6
Distearin	172	78	3.3
Docosane	122	50	2.0
Dodeanol	76	24	6.5
Dodecamethylcyclohexisilox	68	20	2.6
Dodecamethylpentasiloxane	68	20	2.5
Dodecyne	76	24	2.2
Dowtherm	70	21	3.4
Epichlorohydrin	68	20	22.9
Epon Resin	75	24	13.3
Ethonedimine	68	20	14.2
Ethanethiol	58	14	6.9
Ethanethiolic Acid	68	20	13.0
Ethanol	77	25	24.3
Ether	75	25	4.3
Ethoxybenzene	68	20	4.2
Ethoxyethyl Acetate	86	30	7.6
Ethoxypentane	73	23	3.6
Ethoxy-3-methylbutane	68	20	4.0
Ethoxytoluene	68	20	3.9

Liquids	Temperature		Dielectric Constant
	°F	°C	
Ethoxynaphthalene	66	19	3.3
Ethyl Acetate	68	20	6.4
Ethyl Acetoacetate	71	22	15.9
Ethyl Acetoneoxalate	66	19	16.1
Ethyl Acetophenoneoxalate	66	19	3.3
Ethyl Alcohol	77	25	24.3
Ethyl Acrylate	257	125	11.7
Ethylamine	70	21	6.3
Ethyl Amyl Ether	68	20	4.0
Ethyloniline	68	20	5.9
Ethyl Benzene	68	0	5.5
Ethyl Benzoate	68	20	6.0
Ethyl Benzoylacetate	68	20	12.8
Ethyl Benzoylacetate	70	21	8.6
Ethyl Benzyl Ether	68	20	3.8
Ethyl 1-Brombutyrate	68	20	8.0
Ethyl Bromide	64	18	4.9
Ethyl Bromoisobutyrate	68	20	7.9
Ethyl Bromopropionate	68	20	9.4
Ethyl Butyrate	68	20	5.1
Ethyl Carbonate	68	20	3.1
Ethyl Chloracetate	68	20	11.6
Ethyl Chloroformate	68	20	11.3
Ethyl Chloropropionate	68	20	10.1
Ethyl Cinnamate	66	19	5.3
Ethyl Cyanoacetate	68	20	27.0
Ethyl Cyclobutane	68	20	2.0
Ethyl Dodeconoate	68	20	3.4
Ethylene	68	20	1.6
Ethylene Chloride	68	20	10.5
Ethylene Chlorohydrin	75	24	25.0
Ethylene Cyanide	136	58	58.3
Ethylenediamine	64	18	16.0
Ethylene Glycol	68	20	37.0
Ethylene Oxide	30	-1	13.9
Ethyl Ether	-148	-100	8.1
Ethyl Ether	-40	-40	5.7
Ethyl Ether	68	20	4.3
Ethyl Ethoxybenzoate	70	21	7.1
Ethyl Formate	66	19	8.4
Ethyl Formylphenylacetate	68	20	3.0
Ethyl Fumurate	73	23	6.5
Ethyl Iodide	68	20	7.4
Ethyl 2-Iodopropionate	68	20	8.8
Ethyl Iso-Thioconate	68	20	19.7
Ethyl Isothiocyanate	68	20	19.7
Ethyl Levulinatate	70	21	12.1
Ethyl Maleate	73	23	8.5
Ethyl Mercoptan	68	20	8.0
Ethyl Nitrate	68	20	19.7
Ethyl Oleate	80	27	3.2
Ethyl Polmitate	68	20	3.2
Ethyl Pentane	68	20	1.9
Ethyl Phenylacetate	70	21	5.4
Ethyl Propionate	68	20	5.7
Ethyl Solicylate	70	21	8.6
Ethyl Silicate	68	20	4.1
Ethyl Stearate	104	40	3.0
Ethyl Toluene	76	24	2.2
Ethyl Trichloroacetate	68	20	7.8
Ethyl Thiocyanate	68	20	29.6
Ethyl Undeconoate	68	20	3.6
Ethyl Voleate	68	20	4.7
Ethyl Benzene	76	24	3.0
Etibine	-58	-50	2.5
Eugenol	64	18	6.1
Fenchone	68	20	12.0
Ferric Oleate	68	20	2.6
Ferrous Oxide	60	16	14.2
Ferrous Sulfate	58	14	14.2

Properties: Dielectric Constants of Liquids (cont.)

Liquids	Temperature		Dielectric Constant
	°F	°C	
Flexol	75	24	5.3
Flourine	-332	-20	1.5
Fluorotoluene	86	30	4.2
Formamide	68	20	84.0
Formic Acid	60	16	58.5
Freon 12	70	21	2.4
Freon 11	70	21	3.1
Freon 113	70	21	2.6
Furan	76	24	2.9
Furfuraldehyde	68	20	41.9
Furmanium Tetrachloride	76	24	2.4
Furfural	70	21	42.0
Gasoline	70	21	2.0
Germanium Tetrachloride	77	25	2.4
Grapeseed Oil	60	16	2.9
Glycerine	68	20	47.0
Glycerol	68	20	43.0
Glycerol	32	0	47.2
Glycerol Triacetate	70	21	6.0
Glycol	68	20	42.2
Glycol	122	50	35.6
Glycolic Nitrile	68	20	27.0
Guaiaicol	0	-18	11.0
Glucoshepitol	248	120	27.0
Hagemannic Ester	68	20	10.6
Helium-3	58	14	1.1
Heptadecanone	140	60	5.3
Heptane	68	20	1.9
Heptanone	68	20	11.9
Heptanoic Acid	160	71	2.6
Heptyl Alcohol	70	21	6.7
Hexamethylene	75	24	14.1
Hexamethylene Diamine	150	66	6.0
Hexomethyldisiloxane	68	20	2.2
Hexane	68	20	1.9
Hexanol	76	24	13.3
Hexanone	59	15	14.6
Hexdecamethylcyloheptasiloxane	68	20	2.7
Hexyl Iodide	68	20	6.6
Hexylene	62	17	2.0
Hydrocyanic Acid	70	21	2.3
Hydrofluoric Acid	32	0	83.6
Hydrogen	-423	-253	1.2
Hydrogen Bromide	76	24	3.8
Hydrogen Chloride	82	28	4.6
Hydrogen Cyanide	70	21	95.4
Hydrogen Fluoride	32	0	84.0
Hydrogen Iodide	72	22	2.9
Hydrogen Peroxide	32	0	84.2
Hydrogen Sulfide	-120	-84	9.3
Hydrogen Sulfide	48	9	5.8
Hydroxy-4-Methyl-2-Pentanone	76	24	18.2
Hydroxymethylene Camphor	86	30	5.2
Hydroxymethylenebenzyl Cyanide	68	20	6
Hydrazine	68	20	52.9
Indanol	140	60	7.8
Ido-Iodoheptadecane	68	20	3.5
Iodine	284	140	11.0
Iodoheptane	68	20	5.4
Iodoheptane	71	22	4.9
Iodomethane	68	20	7.0
Iodotoluene	68	20	6.1
Isoamyl Alcohol	74	23	15.3
Iodoctane	76	24	4.6
Isoamyl Bromide	76	24	6.1
Isoamyl Butyrate	68	20	3.9
Isoamyl Chloracetate	68	20	7.8
Isoamyl Chloride	64	18	6.4
Isoamyl Chloroformate	68	20	7.8
Isoamyl Iodide	65	18	5.6

Liquids	Temperature		Dielectric Constant
	°F	°C	
Isoamyl Propionate	68	20	4.2
Isoamyl Solicylate	68	20	5.4
Isoamyl Volelate	66	20	3.6
Isobutyl Acetate	68	20	5.6
Isobutyl Alcohol	68	20	18.7
Isobutylamine	70	21	4.5
Isobutyl Benzene	62	17	2.3
Isobutyl Benzoate	68	20	5.9
Isobutyl Bromide	68	20	6.6
Isobutyl Bulryate	68	20	4.0
Isobutyl Chloride	68	20	7.1
Isobutyl Cyanide	74	23	13.3
Isobutyl Chloroformate	68	20	9.2
Isobutyl Formate	66	18	6.5
Isobutylene Bromide	68	20	4.0
Isobutyl Iodide	68	20	5.8
Isobutyl Nitrate	66	19	11.9
Isobutyl Rininoate	70	21	4.7
Isobutyl Volelate	66	19	3.8
Isobutyric Acid	68	20	2.6
Isobutyric Anhydride	68	20	13.9
Isobutyronitrila	75	24	20.8
Isocopronitrilo	68	20	15.7
Isopropyl Alcohol (IPA)	68	20	18.3
Isopropylamine	68	20	5.5
Isopropyl Benzene	68	20	2.4
Isopropylether	77	25	3.9
Isopropyl Nitrate	66	19	11.5
Isoquinoline	76	24	10.7
Isonofrol	70	21	3.4
IsoValeric Acid	68	20	2.7
Jet Fuel (Military—JP4)	70	21	1.7
Kerosene	70	21	1.8
Lactic Acid	66	19	19.4
Lactonitrilla	68	20	38.4
Lead Carbonate	60	16	18.1
Lead Nomoxide	60	16	25.9
Lead Oleate	64	18	3.2
Lead Tetrachloride	68	20	2.8
Lecithin	120	49	3.5
Lemon Oil	70	21	2.3
Limonene	68	20	2.3
Linseed Oil	55	13	3.4
Linoleic Acid	32	0	2.9
Lonone	65	18	10.0
Malonic Nitrate	97	36	47.0
Maleic Anhydride	140	60	51.0
Mannitol	71	22	3.0
Mandelic Nitrile	73	23	18.1
Mandenitrile	73	23	17.0
Menthol	107	42	4.0
Menthenol	110	43	2.1
Methallmine	77	25	9.4
Methoxyethyl Stearate	140	60	3.4
Mercury Diethyl	68	20	2.3
Mesitylene	68	20	2.4
Mesitylene	68	20	3.4
Mesityl Oxide	68	20	15.4
Methal Cyanacetate	69	21	29.4
Methane	32	0	1.6
Methane	-280	-173	1.7
Methanol	77	25	33.6
Methoxybenzene	76	24	4.3
Methoxytoluene	68	20	3.5
Methoxy-4-Methylphenol	60	16	11.0
Methyl Acetate	68	20	7.3
Methyl Acetopheononoaxalate	64	18	2.8
Methylal	68	20	2.7
Methyl Alcohol	-112	-80	56.6
Methyl Alcohol	32	0	37.5

Properties: Dielectric Constants of Liquids (cont.)

Liquids	Temperature		Dielectric Constant
	°F	°C	
Methyl Alcohol	68	20	33.1
Methylamine	70	21	10.5
Methyl Benzoate	68	20	6.6
Methyl Benzylamine	65	18	4.4
Methyl Butane	68	20	1.8
Methyl Butyl Ketone	62	17	12.4
Methyl Butyrate	68	20	5.6
Methyl Chloracetate	68	20	12.9
Methyl Chloride	77	25	12.9
Methyl Cyclohexonal	68	20	13.0
Methyl Cyclohexanone	192	89	18.0
Methyl Cyclopentane	68	20	2.0
Methyl-1-Cyclopentanol	95	35	6.9
Methylene Chloride	70	20	9.3
Methylene Iodide	70	21	5.1
Methyl Ether	78	26	5.0
Methyl Ethyl Ketone	72	22	18.4
Methyl Ethyl Ketoxime	68	20	3.4
Methyl Heptanol	68	20	5.3
Methyl Hexane	68	20	1.9
Methyl Kezyl Ketone	62	17	10.7
Methyl Iodide	68	20	7.1
Methyl-5 Ketocyclohexylene	68	20	24.0
Methyl Nitrobenzoate	80	27	27.0
Methyl Octane	69	21	30.0
Methoxyphenol	82	28	11.0
Methyl O-Methoxybenzoate	70	21	7.8
Methyl-2, 4-Pentondiol	86	30	24.4
Methyl-2-Pentoene	68	21	13.1
Methylphenyl Hydrazin	66	19	7.3
Methyl Propionate	66	19	5.4
Methyl Propyl Ketone	58	14	16.8
Methyl p-toluate	91	33	4.3
Methyl Salicylate	68	20	9.0
Methyl Thiocyanate	68	20	35.9
Methyl Trichloro Silane	68	20	6.8
Methyl Tertiary-butyl Ether (MTBE)	68	20	2.6
Methyl Volorate	66	19	4.3
Metilox	160	71	4.5
Mineral Oil	80	27	2.1
Misella	68	20	1.9
Monomyristin	158	70	6.1
Monopalmitin	152	67	5.3
Monostearin	170	77	4.9
Nanene	50	10	2.0
Naptha	68	20	2.0
Napthalene	185	85	2.3
Napthalene	68	20	2.5
Napthonitrile	70	21	6.4
Napthyl Ethyl Ether	67	19	3.2
Nitric Acid	57	14	40.0
Nitroenisole	68	20	24.0
Nitrobenzol Doxime	248	120	48.1
Nitrobenzene	68	20	36.1
Nitrobenzene	77	25	34.9
Nitrobenzene	176	80	26.3
Nitrobenzyl Alcohol	68	20	22.0
Nitroethane	68	20	19.7
Nitrogen	-203	-130	1.5
Nitromethane	68	20	39.4
Nitroglycerin	68	20	19.0
Nitrosodimethylamine	68	20	54.0
Nitrosyl Bromide	4	-16	13.4
Nitrosyl Chloride	10	-12	18.2
Nitrotoluene	68	20	25.0
Nitrous Oxide	32	0	1.6
Nonane	68	20	2.0
O-Chlorophenol	66	19	8.2
Octadecanol	136	58	3.4
Octamethyltrisiloxane	68	20	2.3

Liquids	Temperature		Dielectric Constant
	°F	°C	
Octanone	68	20	10.3
Octane	68	20	2.0
Octane	76	24	2.1
Octyl Alcohol	64	18	3.4
Octylene	65	18	4.1
Octyl Iodide	68	20	4.9
Octic Acid	68	20	2.5
Oil, Almond	68	20	2.8
Oil, Cottonseed	57	14	3.1
Oil, Grapeseed	61	16	2.9
Oil, Lemon	70	21	2.3
Oil, Linseed	55	13	3.4
Oil, Olive	68	20	3.1
Oil, Paraffin	68	20	2.2-4.7
Oil, Peanut	52	11	3.0
Oil, Petroleum	68	20	2.1
Oil, Pyranol	68	20	5.3
Oil, Sesame	55	13	3.0
Oil, Sperm	68	20	3.2
Oil, Terpentine	68	20	2.2
Oil, Transformer	68	20	2.2
Oleic Acid	68	20	2.5
Oxygen	-315	-193	1.5
Palmitic Acid	160	71	2.3
Paraffin	68	20	2.2
Paraldehyde	68	20	14.5
Peanut Oil	110	43	3.5
Pentochloroethane	60	16	3.7
Pentane	68	20	1.8
Phenethiene	68	20	2.8
Phenenthrene	230	110	2.7
Phenetidine	70	21	7.3
Phenetole	70	21	4.5
Phenol	130	54	8.8
Phenol Ether	85	29	9.8
Phenol Isobuthyl	85	29	14.9
Phenoxyacetylene	76	24	4.8
Phenylacetaldehyde	68	20	4.8
Phenylacetanitrile	80	27	18.0
Phenylacetate	68	20	6.9
Phenylacetic	68	20	3.0
Phenylethanol	68	20	13.0
Phenylethyl Acetate	58	14	4.5
Phenylisocyanate	68	20	8.9
Phenyliso-Thiocyanate	68	20	10.7
Phosgene	32	0	4.7
Phenyl-1-Iropane	68	20	2.7
Phosphine	-76	-60	2.5
Phosphorus	93	34	4.1
Phenylsilylate	122	50	6.3
Phtholide	166	75	36.0
Pinocolin	62	17	12.8
Pinocone	75	24	7.4
Pinane	68	20	2.7
Piperidine	68	20	5.9
Propane	32	0	1.6
Propionoldehyde	62	17	18.9
Propionic Acid	66	19	3.1
Propionic Anhydride	60	16	18.0
Propionitrile	68	20	27.7
Propyl Acetate	68	20	6.3
Propyl Alcohol	68	20	21.8
Propyl Benzene	68	20	2.4
Propyl Bromide	68	20	7.2
Propyl Butyrate	68	20	4.3
Propyl Cholorformate	68	20	11.2
Propyl Ether	78	26	3.4
Propyl Formate	66	19	7.9
Propyl Nitrate	64	18	14.2
Propyl Propionate	68	20	4.7

Properties: Dielectric Constants of Liquids (cont.)

Liquids	Temperature		Dielectric Constant
	°F	°C	
Propyl Volerate	65	18	4.0
Prnopylene	77	25	1.9
Pseudocumene	60	16	2.4
Pulegone	68	20	9.5
Pulezone	66	19	9.7
Pyridine	68	20	12.5
Pyroanol Oil	68	20	5.3
Quinoline	77	25	9.0
Quinoline	460	238	5.1
Safrol	70	21	3.1
Salicyladehyde	68	20	13.9
Santowax	70	21	2.3
Sealtherm 800	750	400	2.2
Sealtherm XLT	750	400	2.3
Selenium	482	250	5.4
Sesame Oil	55	13	3.0
Silicon Tetrachloride	60	16	2.4
Sodium Hydroxide	70	20	80.0
Sodium Oleate	68	20	2.7
Sorbitol	176	80	33.5
Stannic Chloride	72	22	3.2
Stearic Acid	71	160	2.3
Styrene (phenylethene)	77	25	2.4
Succinamide	72	22	2.9
Succinic Acid	78	26	2.4
Sulfur Dioxide	-4	-20	17.6
Sulfurous Oxychloride	72	22	9.1
Sulfur Monochloride	58	14	4.8
Sulfur Trioxide	64	18	3.1
Sulfuryl Chloride	72	22	10.0
Sulfur	752	400	3.4
Sulfur	245	118	3.5
Sulfur Dioxide	32	0	15.6
Sulfuric Acid	68	20	84.0
Sulfuric Oxychloride	72	22	9.2
Sulfur Trioxide	70	21	3.6
Tallow (Beef)	68	20	2.8
Tallowamine	108	42	2.6
Tartaric Acid	68	20	6.0
Tartaric Acid	58	14	35.9
Terpinene	70	21	2.7
Terpineol	68	20	2.8
Tetrobromiethone	68	20	7.1
Tetrachloroethylene	70	21	2.5
Tetradecamethylcycloheptas	68	20	2.7
Tetraethyl Silicate	68	20	4.1
Tetradecanal	100	38	4.7
Tetraethyl Amylenetetrarar	66	189	4.4
Tetraethyl Propane Tetracarboxylate	66	19	5.2
Tetraethyl Propylene Tetracarboxylate	66	19	5.2
Tetrahydro-B-Naphthol	68	20	11.0
Tetratriocontadiene	70	21	2.8
Tetronitrimethane	68	20	2.2
Thioacetic Acid	68	20	13.0
Thionyl Bromide	68	20	9.1
Thionyl Chloride	68	20	9.3
Thiophene	68	20	2.8
Thiophosphoryl Chloride	70	21	5.8
Tin Tetrochloride	68	20	2.9
Titanium Tetrochloride	68	20	2.8
Thujone	32	0	10.0
Toluene	68	20	2.4
Toluidine	68	20	6.0
Tolunitrile	73	23	18.8
Totane	111	44	5.5
Tolyl Methyl Ether	68	20	3.5
Trans-3-Hexane	76	24	2.0
Transformer Oil	68	20	2.2
Transmission Oil	80	27	2.2
Trichloroethane	68	20	7.5

Liquids	Temperature		Dielectric Constant
	°F	°C	
Triethylamine	75	24	2.4
Triethylamine	39	4	2.9
Trifluoroacetic Acid	68	20	39.0
Trinitrotoluene	68	20	22.0
Triethyl Ethanetricarbox	66	19	6.5
Trimethyl-3-Heptane	68	20	2.2
Tribomopropane	68	20	6.4
Tributylphosphate	86	30	8.0
Trichloroacetic Acid	141	61	4.5
Trichlorotoluene	70	21	6.9
Trichloroethylene	61	16	3.4
Trichloropropane	76	24	2.4
Tricosanane	176	80	4.0
Tricosyl Phosphate	104	40	6.9
Triethyl Aconitate	68	20	6.4
Triethylamine	70	21	3.2
Triethylene Glycol	70	21	24.2
Triethyl Aluminum	68	20	2.9
Triethyl Isoaconitate	68	20	7.2
Trifluoroactic Acid	68	20	39.0
Trifluorotoluene	86	30	9.2
Triethylomine	39	4	2.9
Trimethylbenzene	68	20	2.3
Trimethylborate	68	20	8.2
Trimethylbutane	68	20	1.9
Trimethylpentane	68	20	2.0
Trimethylsulfanilic Acid	64	18	89.0
Trinitrobenzene	68	20	2.2
Trinitrotoluene	69	21	22.0
Triolein	76	24	3.2
Tripolmitin	140	60	2.9
Triphenylmethane	212	100	2.5
Tristearin	158	70	2.8
Turpentine	68	20	2.2
Undecane	68	20	2.0
Undecanone	58	14	8.4
Urea	71	22	3.5
Urethane	74	23	3.2
Valaraldehyde	58	14	11.8
Valeric Acid	62	17	2.6
Valeronitrile	70	21	17.7
Vanadium Oxybromide	78	26	3.6
Vanadium Oxychloride	78	26	3.4
Vanadium Tetrachloride	78	26	3.0
Vegetable Oil	100	38	4.0
Vegetable Oil	230	110	3.3
Veratrol	73	23	4.5
Vinyl Ether	68	20	3.9
Water	32	0	88.0
Water	68	20	80.0
Water	212	100	48.0
Water (Ultra-Clean, DI)	68	20	12-15
Wax	100	38	7.5
Xylene	68	20	2.4
Xylenol	62	17	3.9
Xylidine	68	20	5.0

Properties: Dielectric Constants of Solids

Material	Dielectric Constant
Acetamide	41.0
Acetanilide	2.8
Acetic Acid	4.1
Aluminum Phosphate	6.0
Ammonium Bromide	7.2
Ammonium Chloride	7.0
Antimony Trichloride	5.3
Asbestos	4.8
Asphalt	2.7
Bakelite	5.0
Barium Chloride	11.0
Barium Chloride	9.4
Barium Nitrate	5.8
Barium Sulfate	11.4
Calcium Carbonate	9.1
Calcium Fluoride	7.4
Calcium Sulfate	5.6
Cellulose	4.0
Cellulose Acetate	3.6–7.5
Cement	1.5–2.1
Cereals	3.0–5.0
Charcoal	1.2–1.8
Cupric Oleafe	2.8
Cupric Oxide	18.1
Cupric Sulfate	10.3
Diamond	10.0
Diphenylethane	2.7
Dolomite	8.0
Ferrous Oxide	14.2
Fly Ash	1.9–2.6
Glass	3.7–4.2
Iodine	4.0
Lead Acetate	2.5
Lead Carbonate	18.1
Lead Chloride	4.2
Lead Nomoxide	25.9
Lead Nitrate	37.7
Lead Oleate	3.3
Lead Oxide	25.9
Lead Sulfate	14.3
Magnesium Oxide	9.7
Malachite	7.2
Mercuric Chloride	3.2
Mercurous Chloride	9.4
Mica	7.0
Napthalane	2.5

Material	Dielectric Constant
Nylon	3.7
Paper	2.0
Paraffin	2.2
Phenonthrene	2.8
Phenol	4.3
Phosphorus, Red	4.1
Phosphorus, Yellow	3.6
Polyethylene	4.0–5.0
Polypropylene	1.5
Porcelain	5.0–7.0
Potassium Aluminum Sulphate	3.8
Potassium Carbonate	5.6
Potassium Chlorate	5.1
Potassium Chloride	5.0
Potassium Chloronate	7.3
Potassium Iodide	5.6
Potassium Nitrate	5.0
Potassium Sulfate	5.9
Quartz	4.4
Resorcinol	3.2
Rice	3.5
Rubber	3.0
Sand	3.0–5.0
Selenium	11.0
Shellac	3.5
Silver Bromide	12.2
Silver Chloride	11.2
Silver Cyanide	5.6
Slate	7.0
Sodium Carbonate	8.4
Sodium Carbonate	5.3
Sodium Chloride	6.1
Sodium Nitrate	5.2
Sodium Oleate	2.8
Sodium Perchlorate	5.4
Sulfur	3.4
Sugar	3.0
Sucrose	3.3
Tantalum Oxide	11.6
Thallium Chloride	46.9
Thorium Oxide	10.6
P-Toluidine	3.0
Urea	3.5
Zinc Sulfide	8.2
Zirconium Oxide	12.5
Teflon	2.0

Properties: Viscosity of Gases and Vapors

The curves for hydrocarbon vapors and natural gases in the chart at the upper right are taken from Maxwell; the curves for all other gases (except helium) in the chart are based upon Sutherland's formula, as follows:

$$\mu = \mu_o \left(\frac{0.555 T_o + C}{0.555 T + C} \right) \left(\frac{T}{T_o} \right)^{3/2}$$

where:

μ = viscosity, in centipoise at temperature T .

μ_o = viscosity, in centipoise at temperature T_o .

T = absolute temperature, in degrees Rankine (460 + deg. F) for which viscosity is desired.

T_o = absolute temperature, in degrees Rankine, for which viscosity is known.

C = Sutherland's constant.


Note: The variation of viscosity with pressure is small for most gases. For gases given on this page, the correction of viscosity for pressure is less than 10% for pressures up to 500 pounds per square inch.

Fluid	Approximate Values of "C"
O ₂	127
Air	120
N ₂	111
CO ₂	240
CO	118
SO ₂	416
NH ₃	370
H ₂	72


Upper chart example: The viscosity of sulphur dioxide gas (SO₂) at 200°F (93°C) is 0.016 centipoise.

Lower chart example: The viscosity of carbon dioxide gas (CO₂) at about 80°F (26.7°) is 0.015 centipoise.

Viscosity of various gases

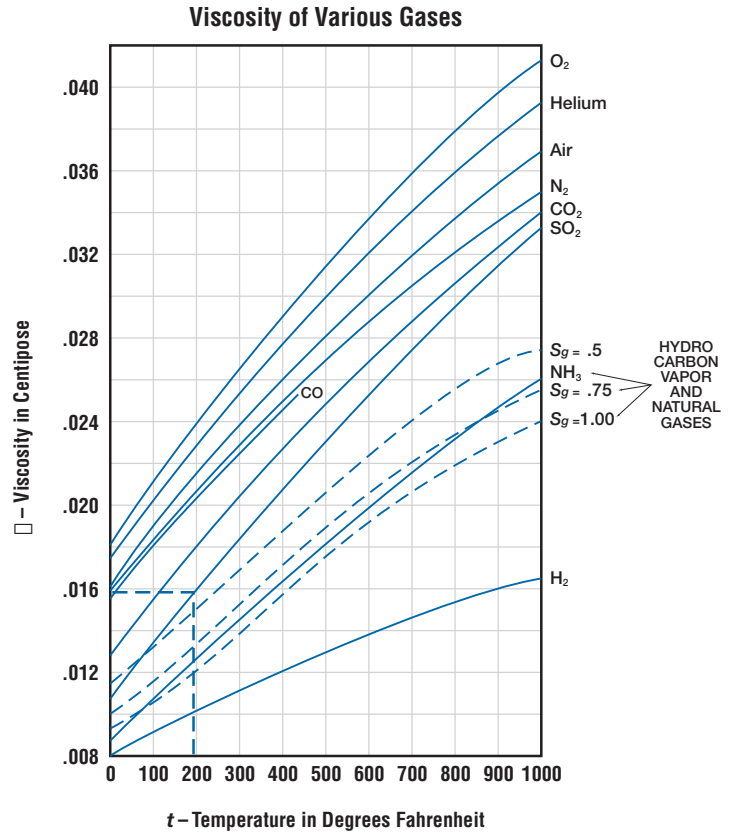

Viscosity of Refrigerant Vapors (saturated and superheated vapors)

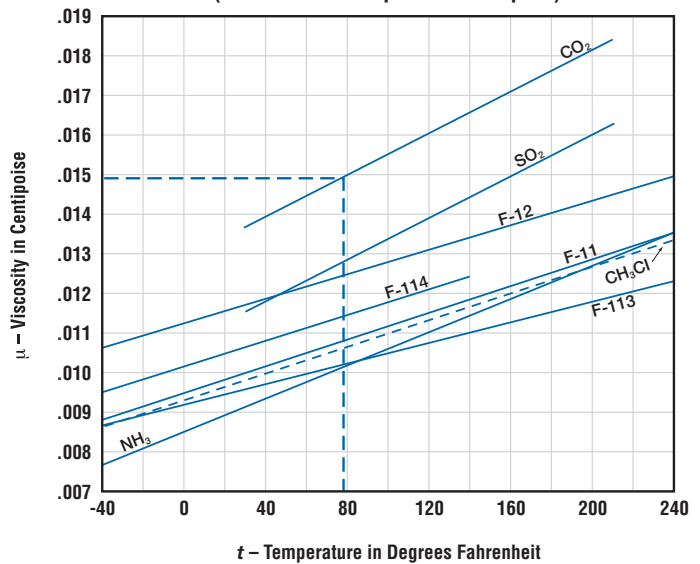

Properties: Viscosity of Water and Steam


Temperature °F (°C)	Viscosity of Water and Steam – in Centipoise (μ)									
	1 PSIA	2 PSIA	5 PSIA	10 PSIA	20 PSIA	50 PSIA	100 PSIA	200 PSIA	500 PSIA	1000 PSIA
Saturated Water	.667	.524	.388	.313	.255	.197	.164	.138	.111	.094
Saturated Steam	.010	.010	.011	.012	.012	.013	.014	.015	.017	.019
<hr style="border-top: 1px dashed black;"/>										
1000 (538)	.030	.030	.030	.030	.030	.030	.030	.030	.030	.031
950 (510)	.029	.029	.029	.029	.029	.029	.029	.029	.029	.030
900 (482)	.028	.028	.028	.028	.028	.028	.028	.028	.028	.028
850 (454)	.026	.026	.026	.026	.026	.026	.027	.027	.027	.027
800 (427)	.025	.025	.025	.025	.025	.025	.025	.025	.026	.026
750 (399)	.024	.024	.024	.024	.024	.024	.024	.024	.025	.025
700 (371)	.023	.023	.023	.023	.023	.023	.023	.023	.023	.024
650 (343)	.022	.022	.022	.022	.022	.022	.022	.022	.023	.023
600 (316)	.021	.021	.021	.021	.021	.021	.021	.021	.021	.021
550 (288)	.020	.020	.020	.020	.020	.020	.020	.020	.020	.019
500 (260)	.019	.019	.019	.019	.019	.019	.019	.018	.018	.103
450 (232)	.018	.018	.018	.018	.017	.017	.017	.017	.115	.116
400 (204)	.016	.016	.016	.016	.016	.016	.016	.016	.131	.132
350 (177)	.015	.015	.015	.015	.015	.015	.015	.152	.153	.154
300 (149)	.014	.014	.014	.014	.014	.014	.182	.183	.183	.184
250 (121)	.013	.013	.013	.013	.013	.228	.228	.228	.228	.229
200 (93)	.012	.012	.012	.012	.300	.300	.300	.300	.300	.301
150 (66)	.011	.011	.427	.427	.427	.427	.427	.427	.427	.428
100 (37.8)	.680	.680	.680	.680	.680	.680	.680	.680	.680	.680
50 (10)	1.299	1.299	1.299	1.299	1.299	1.299	1.299	1.299	1.299	1.298
32 (0)	1.753	1.763	1.753	1.753	1.753	1.753	1.753	1.752	1.751	1.749

Values below the line are for water.


Properties: Viscosity of Various Liquids

1. Carbon DioxideCO₂
2. AmmoniaNH₃
3. Methyl ChlorideCH₃Cl
4. Sulphur Dioxide.....SO₂
5. Freon 12F-12
6. Freon 114F-114
7. Freon 11F-11
8. Freon 113F-113
9. Ethyl AlcoholC₂H₅OH
10. Isopropyl Alcohol(CH₃)₂CH₂O
11. 20% Sulphuric Acid20% H₂SO₄
12. Dowtherm E
13. Dowtherm A
14. 20% Sodium Hydroxide.....20% NaOH
15. MercuryHg
16. 10% Sodium Chloride Brine10% NaCl
17. 20% Sodium Chloride Brine20% NaCl
18. 10% Calcium Chloride Brine10% CaCl₂
19. 20% Calcium Chloride Brine20% CaCl₂

Example: The viscosity of ammonia at 40°F is 0.14 centipoise.

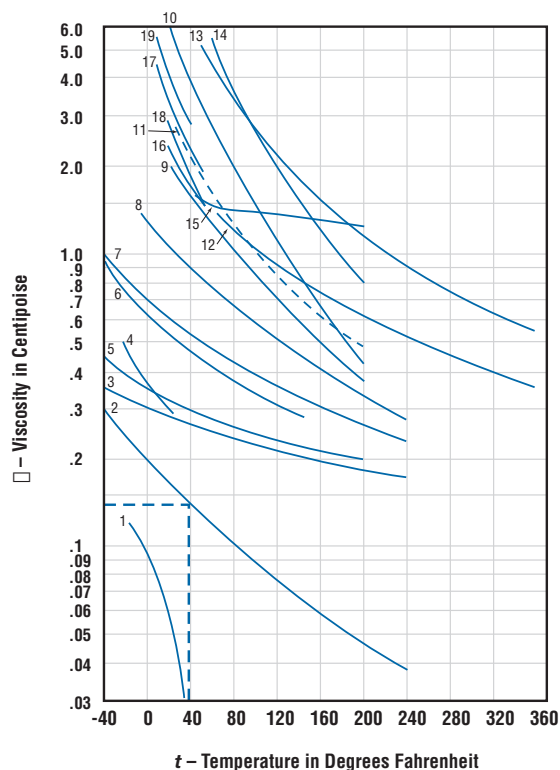

Properties: Viscosity of Liquid Petroleum Products

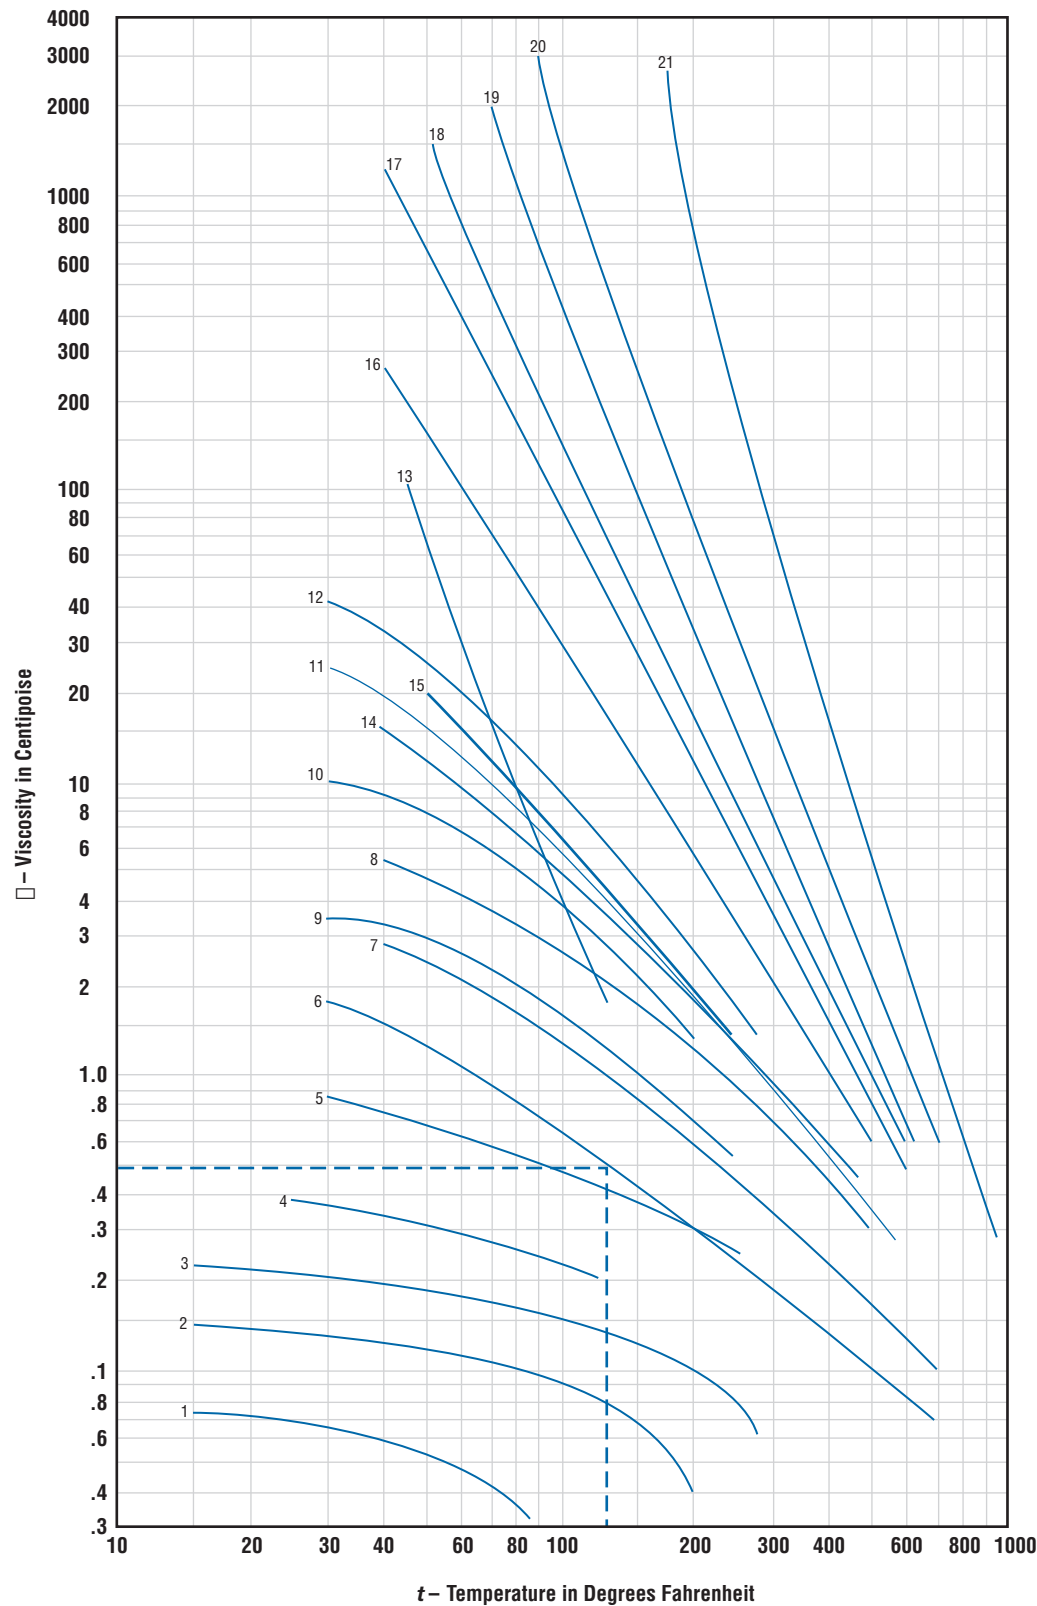


1. Ethane (C₂H₆)
2. Propane (C₃H₈)
3. Butane (C₄H₁₀)
4. Natural Gasoline
5. Gasoline
6. Water
7. Kerosene
8. Distillate
9. 48 Deg. API Crude
10. 40 Deg. API Crude
11. 35.6 Deg. API Crude
12. 32.6 Deg. API Crude
13. Salt Creek Crude
14. Fuel 3 (Max.)
15. Fuel 5 (Min.)
16. SAE 10 Lube (100 V.I.)
17. SAE 30 Lube (100 V.I.)
18. Fuel 5 (Max.) or Fuel 6 (Min.)
19. SAE 70 Lube (100 V.I.)
20. Bunker C Fuel (Max.) and M.C. Residuum
21. Asphalt

Example: The viscosity of water at 125°F is 0.52 centipoise (Curve No. 6).

Note: Consult factory whenever viscosity of fluid exceeds 300 centipoise.

Pipe Data: Dimensions of Blind Flanges

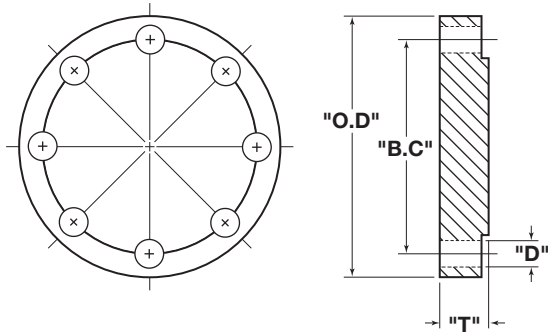

NOTE: Pressure ratings shown for forged steel flanges apply to all ASA/ANSI standard flanges.


Cast Iron-125#					
Nominal Pipe Size	Outside Dia. of Flange "O.D."	Thickness "T"	Dia. of Bolt Circle "BC"	No. of Holes	Dia. of Bolt Holes "D"
1"	4 1/4"	7/16"	3 1/8"	4	5/8"
1 1/2"	5"	9/16"	3 7/8"	4	5/8"
2"	6"	5/8"	4 3/4"	4	3/4"
2 1/2"	7"	11/16"	5 1/2"	4	3/4"
3"	7 1/2"	3/4"	6"	4	3/4"
3 1/2"	8 1/2"	13/16"	7"	8	3/4"
4"	9"	15/16"	7 1/2"	8	3/4"
5"	10"	15/16"	8 1/2"	8	7/8"
6"	11"	1"	9 1/2"	8	7/8"
8"	13 1/2"	1 1/8"	11 3/4"	8	7/8"

Cast Iron-250#					
Nominal Pipe Size	Outside Dia. of Flange "O.D."	Thickness "T"	Dia. of Bolt Circle "BC"	No. of Holes	Dia. of Bolt Holes "D"
1"	4 7/8"	1 1/16"	3 1/2"	4	3/4"
1 1/2"	6"	1 3/16"	4 1/2"	4	7/8"
2"	6 1/2"	7/8"	5"	8	3/4"
2 1/2"	7 1/2"	1"	5 5/8"	8	7/8"
3"	8 1/4"	1 1/8"	6 3/8"	8	7/8"
3 1/2"	9"	1 3/16"	7 1/4"	8	7/8"
4"	10"	1 1/4"	7 7/8"	8	7/8"
5"	11"	1 1/2"	9 1/4"	8	7/8"
6"	12 1/2"	1 5/8"	10 5/8"	12	7/8"
8"	15"	1 7/8"	13"	12	1"


Forged Steel - 150#					
Nominal Pipe Size	Outside Dia. of Flange "O.D."	Thickness "T"	Dia. of Bolt Circle "BC"	No. of Holes	Dia. of Bolt Holes "D"
1/2"	3 1/2"	7/16"	2 3/8"	4	5/8"
3/4"	3 3/4"	1/2"	2 3/4"	4	5/8"
1"	4 1/4"	9/16"	3 3/8"	4	5/8"
1 1/2"	5"	1 1/16"	3 3/8"	4	5/8"
2"	6"	3/4"	4 3/4"	4	3/4"
2 1/2"	7"	7/8"	5 1/2"	4	3/4"
3"	7 1/2"	15/16"	6"	4	3/4"
3 1/2"	8 1/2"	15/16"	7"	8	3/4"
4"	9"	15/16"	7 1/2"	8	3/4"
5"	10"	15/16"	8 1/2"	8	7/8"
6"	11"	1"	9 1/2"	8	7/8"
8"	13 1/2"	1 1/8"	11 3/4"	8	7/8"

Forged Steel - 300#					
Nominal Pipe Size	Outside Dia. of Flange "O.D."	Thickness "T"	Dia. of Bolt Circle "BC"	No. of Holes	Dia. of Bolt Holes "D"
1/2"	3 3/4"	9/16"	2 5/8"	4	5/8"
3/4"	4 1/8"	5/8"	3 1/4"	4	3/4"
1"	4 3/8"	1 1/16"	3 1/2"	4	3/4"
1 1/2"	6"	1 3/16"	4 1/2"	4	7/8"
2"	6 1/2"	7/8"	5"	8	3/4"
2 1/2"	7 1/2"	1"	5 5/8"	8	7/8"
3"	8 1/4"	1 1/8"	6 3/8"	8	7/8"
3 1/2"	9"	1 3/16"	7 1/4"	8	7/8"
4"	10"	1 1/4"	7 7/8"	8	7/8"
5"	11"	1 1/2"	9 1/4"	8	7/8"
6"	12 1/2"	1 5/8"	10 5/8"	12	7/8"
8"	15"	1 7/8"	13"	12	1"

Forged Steel - 600#					
Nominal Pipe Size	Outside Dia. of Flange "O.D."	Thickness "T"	Dia. of Bolt Circle "BC"	No. of Holes	Dia. of Bolt Holes "D"
1/2"	3 3/4"	9/16"	2 5/8"	4	5/8"
3/4"	4 5/8"	5/8"	3 3/4"	4	3/4"
1"	4 7/8"	1 1/16"	3 1/2"	4	3/4"
1 1/2"	6 1/8"	7/8"	4 1/2"	4	7/8"
2"	6 1/2"	1"	5"	8	3/4"
2 1/2"	7 1/2"	1 1/8"	5 5/8"	8	7/8"
3"	8 1/4"	1 1/4"	6 3/8"	8	7/8"
3 1/2"	9"	1 3/16"	7 1/4"	8	1"
4"	10 3/4"	1 1/2"	8 1/2"	8	1"
5"	13"	1 3/4"	10 1/2"	8	1 1/8"
6"	14"	1 7/8"	11 1/2"	12	1 1/8"
8"	16 1/2"	2 3/16"	13 3/4"	12	1 1/4"



150# & 300#




600# & above

Pipe Data: Dimensions of Blind Flanges


Forged Steel – 900#					
Nominal Pipe Size	Outside Dia. of Flange "O.D."	Thickness "T"	Dia. of Bolt Circle "BC"	No. of Holes	Dia. of Bolt Holes "D"
1/2"	4 3/4"	7/8"	3 1/4"	4	7/8"
3/4"	5 1/8"	1"	3 1/2"	4	7/8"
1"	5 5/8"	1 1/8"	4"	4	1"
1 1/2"	7"	1 1/4"	4 7/8"	4	1 1/8"
2"	8 1/2"	1 1/2"	6 1/2"	8	1"
2 1/2"	9 5/8"	1 5/8"	7 1/2"	8	1 1/8"
3"	9 1/2"	1 1/2"	7 1/2"	8	1"
4"	11 1/2"	1 3/4"	9 1/4"	8	1 1/4"
5"	13 3/4"	2"	11"	8	1 5/8"
6"	15"	2 1/8"	12 1/2"	12	1 1/4"
8"	18 1/2"	2 1/2"	15 1/2"	12	1 1/2"

Forged Steel – 1500#					
Nominal Pipe Size	Outside Dia. of Flange "O.D."	Thickness "T"	Dia. of Bolt Circle "BC"	No. of Holes	Dia. of Bolt Holes "D"
1/2"	4 3/4"	7/8"	3 1/4"	4	7/8"
3/4"	5 1/8"	1"	3 1/2"	4	7/8"
1"	5 5/8"	1 1/8"	4"	4	1"
1 1/2"	7"	1 1/4"	4 7/8"	4	1 1/8"
2"	8 1/2"	1 1/2"	6 1/2"	8	1"
2 1/2"	9 5/8"	1 5/8"	7 1/2"	8	1 1/8"
3"	10 1/2"	1 7/8"	8"	8	1 1/4"
4"	12 1/4"	2 1/8"	9 1/2"	8	1 3/8"
5"	14 3/4"	2 3/8"	11 1/2"	8	1 5/8"
6"	15 1/2"	3 1/4"	12 1/2"	12	1 1/2"
8"	19"	3 5/8"	15 1/2"	12	1 3/4"

Forged Steel – 2500#					
Nominal Pipe Size	Outside Dia. of Flange "O.D."	Thickness "T"	Dia. of Bolt Circle "BC"	No. of Holes	Dia. of Bolt Holes "D"
1/2"	5 1/4"	1 1/16"	3 1/2"	4	7/8"
3/4"	5 1/2"	1 1/4"	3 3/4"	4	7/8"
1"	6 1/4"	1 3/8"	4 1/4"	4	1"
1 1/2"	8"	1 3/4"	5 3/4"	4	1 1/4"
2"	9 1/4"	2"	6 3/4"	8	1 1/8"
2 1/2"	10 1/2"	2 1/4"	7 3/4"	8	1 1/4"
3"	12"	2 5/8"	9"	8	1 3/8"
4"	14"	3"	10 3/4"	8	1 5/8"
5"	16 1/2"	3 5/8"	12 3/4"	8	1 7/8"
6"	19"	4 1/4"	14 1/2"	8	2 1/8"
8"	21 3/4"	5"	17 3/4"	12	2 1/8"



150# & 300#



600# & above

Pipe Data: Flange Ratings

Flanges DIN versus ANSI

Pressure Rating		Sizes	
ANSI	DIN	ANSI	DIN
125 lbs.	PN 6 / PN 10	1"	DN 25
150 lbs.	PN 16	1 1/2"	DN 40
300 lbs.	PN 25 / PN 40	2"	DN 50
400 lbs.	PN 64	2 1/2"	DN 65
600 lbs.	PN 100	3"	DN 80
900 lbs.	PN 150	4"	DN 100
1500 lbs.	PN 250	5"	DN 125
2500 lbs.	PN 320 / PN 400	6"	DN 150

Type

- Flat Face = Form B flange
- Raised Face = Form C flange (Form E is smoother facing finish)
- Ring Joint Flange = Only for ANSI flanges

A DIN flange is never identical to an ANSI flange; the table at left is a guideline to find the most equivalent ANSI/DIN flange. DIN increments differ from country to country, the table refers to the German DIN standard.

Class 150 pressure-temperature ratings (pressure-PSIG)

Temp. °F	Materials																	Temp. °F	
	304 SS	304L or 316L SS	310 SS	316SS 316/316L SS Dual Grade	321 SS	347/348 SS	A105 Carbon Steel	Carp. 20SS	Grade F1 C-1/2 Mo	Grade F11 1 1/2 Cr-1/2 Mo	Grade F22 2 1/2 Cr-1 Mo	Grade F91 9 Cr-1 Mo-V	Hast. B2	Hast. C & Inconel 625 & Incoloy 825	Incoloy 800	Inconel 600	Monel 400 & 405		Nickel 200
-20 to 100	275	230	275	275	275	275	285	290	265	290	290	290	290	290	275	290	230	185	-20 to 100
200	230	195	245	235	250	255	260	260	260	260	260	260	260	260	255	260	200	185	200
300	205	175	225	215	230	230	230	230	230	230	230	230	230	230	230	230	190	185	300
400	190	160	200	195	200	200	200	200	200	200	200	200	200	200	200	200	180	185	400
500	170	150	170	170	170	170	170	170	170	170	170	170	170	170	170	170	170	170	500
600	140	140	140	140	140	140	140	140	140	140	140	140	140	140	140	140	140	140	600
650	125	125	125	125	125	125	125	125	125	125	125	125	125	125	125	125	125	-	650
700	110	110	110	110	110	110	110	110	110	110	110	110	110	110	110	110	110	-	700
750	95	95	95	95	95	95	95	95	95	95	95	95	95	95	95	95	95	-	750
800	80	80	80	80	80	80	80	80	80	80	80	80	80	80	80	80	80	-	800
850	65	65	65	65	65	65	65	-	65	65	65	65	-	65	65	65	65	-	850
900	50	-	50	50	50	50	50	-	50	50	50	50	-	50	50	50	50	-	900
950	35	-	35	35	35	35	35	-	35	35	35	35	-	35	35	35	-	-	950
1000	20	-	20	20	20	20	20	-	20	20	20	20	-	20	20	20	-	-	1000

Pipe Data: Flange Ratings (cont.)

Class 300 pressure-temperature ratings (pressure-PSIG)

Temp. °F	Materials																	Temp. °F.	
	304 SS	304L or 316L SS	310 SS	316SS 316/316L SS Dual Grade	321 SS	347/348 SS	A105 Carbon Steel	Carp. 20SS	Grade F1 C-½ Mo	Grade F11 1½ Cr-½ Mo	Grade F22 2½ Cr-1 Mo	Grade F91 9 Cr-1 Mo-V	Hast. B2	Hast. C & Inconel 625 & Incoloy 825	Incoloy 800	Inconel 600	Monel 400 & 405		Nickel 200
-20 to 100	720	600	720	720	720	720	740	750	695	750	750	750	750	750	720	750	600	480	-20 to 100
200	600	510	635	620	650	660	680	740	695	750	750	750	750	750	665	750	525	480	200
300	540	455	580	560	595	615	655	710	685	720	730	730	730	640	730	490	480	300	
400	495	420	540	515	550	575	635	680	660	695	705	705	705	700	620	705	475	480	400
500	465	395	515	480	515	540	605	655	640	665	665	665	665	600	665	475	455	500	
600	440	370	495	450	485	515	570	605	605	605	605	605	605	590	605	475	415	600	
650	430	365	485	440	475	505	550	590	590	590	590	590	590	580	590	475	-	650	
700	420	360	480	435	465	495	530	570	570	570	570	570	570	570	570	470	-	700	
750	415	355	470	425	460	490	505	530	530	530	530	530	530	530	530	465	-	750	
800	405	345	465	420	450	485	410	510	510	510	510	510	510	510	510	460	-	800	
850	395	340	460	420	445	485	320	-	485	485	485	485	-	485	485	375	-	850	
900	390	-	450	415	440	450	230	-	450	450	450	450	-	450	450	275	-	900	
950	380	-	385	385	385	385	135	-	280	320	385	385	-	385	385	365	-	950	
1000	355	-	365	365	365	365	85	-	165	215	265	365	-	365	365	240	-	1000	
1050	325	-	355	360	360	360	-	-	-	145	175	360	-	360	360	155	-	1050	
1100	255	-	260	305	310	325	-	-	-	95	110	300	-	325	325	105	-	110	
1150	205	-	190	235	235	275	-	-	-	65	70	225	-	275	275	75	-	1150	
1200	165	-	135	185	186	205	-	-	-	40	40	145	-	205	205	70	-	1200	
1250	135	-	105	145	140	180	-	-	-	-	-	-	-	165	145	-	-	1250	
1300	115	-	75	115	110	140	-	-	-	-	-	-	-	120	70	-	-	1300	
1350	95	-	60	95	85	105	-	-	-	-	-	-	-	-	55	-	-	1350	
1400	75	-	45	75	65	75	-	-	-	-	-	-	-	-	40	-	-	1400	
1450	60	-	35	60	50	60	-	-	-	-	-	-	-	-	35	-	-	1450	
1500	40	-	25	40	40	40	-	-	-	-	-	-	-	-	25	-	-	1500	

Class 600 pressure-temperature ratings (pressure-PSIG)

Temp. °F	Materials																	Temp. °F.	
	304 SS	304L or 316L SS	310 SS	316SS 316/316L SS Dual Grade	321 SS	347/348 SS	A105 Carbon Steel	Carp. 20SS	Grade F1 C-½ Mo	Grade F11 1½ Cr-½ Mo	Grade F22 2½ Cr-1 Mo	Grade F91 9 Cr-1 Mo-V	Hast. B2	Hast. C & Inconel 625 & Incoloy 825	Incoloy 800	Inconel 600	Monel 400 & 405		Nickel 200
-20 to 100	1440	1200	1440	1440	1440	1440	1480	1500	1395	1500	1500	1500	1500	1500	1440	1500	1200	960	-20 to 100
200	1200	1020	1270	1240	1295	1325	1360	1485	1395	1500	1500	1500	1500	1500	1330	1500	1050	960	200
300	1075	910	1160	1120	1190	1235	1310	1420	1375	1445	1455	1455	1455	1455	1275	1455	980	960	300
400	995	840	1085	1025	1105	1150	1265	1365	1325	1385	1410	1410	1410	1395	1240	1410	945	960	400
500	930	785	1025	955	1030	1085	1205	1310	1285	1330	1330	1330	1330	1330	1205	1330	945	905	500
600	885	745	990	900	975	1030	1135	1210	1210	1210	1210	1210	1210	1210	1175	1210	945	825	600
650	865	730	970	885	950	1015	1100	1175	1175	1175	1175	1175	1175	1175	1155	1175	945	-	650
700	845	720	955	870	930	995	1060	1135	1135	1135	1135	1135	1135	1135	1135	1135	940	-	700
750	825	705	940	855	915	985	1015	1065	1065	1065	1065	1065	1065	1065	1065	1065	930	-	750
800	810	690	930	845	900	975	825	1015	1015	1015	1015	1015	1015	1015	1015	1015	915	-	800
850	790	675	915	835	895	970	640	-	975	975	975	975	-	975	975	975	755	-	850
900	780	-	900	830	885	900	460	-	900	900	900	900	-	900	900	900	550	-	900
950	765	-	775	775	775	775	275	-	560	640	775	775	-	775	775	725	-	-	950
1000	710	-	725	725	725	725	170	-	330	430	535	725	-	725	725	480	-	-	1000
1050	650	-	705	720	720	720	-	-	-	290	350	720	-	720	720	310	-	-	1050
1100	515	-	520	610	625	645	-	-	-	190	220	605	-	645	645	205	-	-	1100
1150	410	-	375	475	475	550	-	-	-	130	135	445	-	550	550	150	-	-	1150
1200	330	-	275	370	320	410	-	-	-	80	80	290	-	410	410	135	-	-	1200
1250	265	-	205	295	280	365	-	-	-	-	-	-	-	330	290	-	-	-	1250
1300	225	-	150	235	220	275	-	-	-	-	-	-	-	240	135	-	-	-	1300
1350	185	-	115	190	170	205	-	-	-	-	-	-	-	-	110	-	-	-	1350
1400	150	-	90	150	130	150	-	-	-	-	-	-	-	-	75	-	-	-	1400
1450	115	-	65	115	105	115	-	-	-	-	-	-	-	-	70	-	-	-	1450
1500	85	-	50	85	75	85	-	-	-	-	-	-	-	-	55	-	-	-	1500

Pipe Data: Flange Ratings (cont.)

Class 900 pressure-temperature ratings (pressure-PSIG)

Temp. °F	Materials																	Temp. °F.	
	304 SS	304L or 316L SS	310 SS	316SS 316/316L SS Dual Grade	321 SS	347/348 SS	A105 Carbon Steel	Carp. 20SS	Grade F1 C-½ Mo	Grade F11 1¼ Cr-½ Mo	Grade F22 2¼ Cr-1 Mo	Grade F91 9 Cr-1 Mo-V	Hast. B2	Hast. C & Inconel 625 & Incoloy 825	Incoloy 800	Inconel 600	Monel 400 & 405		Nickel 200
-20 to 100	2160	1800	2160	2160	2160	2160	2220	2250	2090	2250	2250	2250	2250	2250	2160	2250	1800	1440	-20 to 100
200	1800	1535	1910	1860	1945	1985	2035	2225	2090	2250	2250	2250	2250	2250	1995	2250	1575	1440	200
300	1615	1370	1740	1680	1785	1850	1965	2130	2060	2165	2185	2185	2185	2185	1915	2185	1470	1440	300
400	1490	1260	1625	1540	1655	1730	1900	2045	1985	2080	2115	2115	2115	2095	1860	2115	1420	1440	400
500	1395	1180	1540	1435	1545	1625	1810	1965	1925	1995	1995	1995	1995	1995	1805	1995	1420	1360	500
600	1325	1115	1485	1355	1460	1550	1705	1815	1815	1815	1815	1815	1815	1815	1765	1815	1420	1240	600
650	1295	1095	1455	1325	1425	1520	1650	1765	1765	1765	1765	1765	1765	1765	1735	1765	1420	-	650
700	1265	1080	1435	1305	1395	1490	1590	1705	1705	1705	1705	1705	1705	1705	1705	1705	1410	-	700
750	1240	1060	1410	1280	1375	1475	1520	1595	1595	1595	1595	1595	1595	1595	1595	1595	1395	-	750
800	1215	1035	1395	1265	1355	1460	1235	1525	1525	1525	1525	1525	1520	1525	1525	1525	1375	-	800
850	1190	1015	1375	1255	1340	1455	955	-	1460	1460	1460	1460	-	1460	1460	1460	1130	-	850
900	1165	-	1350	1245	1325	1350	690	-	1350	1350	1350	1350	-	1350	1350	1350	825	-	900
950	1145	-	1160	1160	1160	1160	410	-	845	955	1160	1160	-	1160	1160	1090	-	-	950
1000	1065	-	1090	1090	1090	1090	255	-	495	650	800	1090	-	1090	1090	720	-	-	1000
1050	975	-	1060	1080	1080	1080	-	-	-	430	525	1080	-	1080	1080	465	-	-	1050
1100	770	-	780	915	935	965	-	-	-	290	330	905	-	965	965	310	-	-	1100
1150	615	-	565	710	710	825	-	-	-	195	205	670	-	825	825	225	-	-	1150
1200	495	-	410	555	555	620	-	-	-	125	125	430	-	615	620	205	-	-	1200
1250	400	-	310	440	420	545	-	-	-	-	-	-	-	495	430	-	-	-	1250
1300	340	-	225	350	330	410	-	-	-	-	-	-	-	360	205	-	-	-	1300
1350	280	-	175	290	255	310	-	-	-	-	-	-	-	-	165	-	-	-	1350
1400	225	-	135	225	195	225	-	-	-	-	-	-	-	-	115	-	-	-	1400
1450	175	-	100	175	155	175	-	-	-	-	-	-	-	-	105	-	-	-	1450
1500	125	-	75	125	115	125	-	-	-	-	-	-	-	-	80	-	-	-	1500

Class 1500 pressure-temperature ratings (pressure-PSIG)

Temp. °F	Materials																	Temp. °F.	
	304 SS	304L or 316L SS	310 SS	316SS 316/316L SS Dual Grade	321 SS	347/348 SS	A105 Carbon Steel	Carp. 20SS	Grade F1 C-½ Mo	Grade F11 1¼ Cr-½ Mo	Grade F22 2¼ Cr-1 Mo	Grade F91 9 Cr-1 Mo-V	Hast. B2	Hast. C & Inconel 625 & Incoloy 825	Incoloy 800	Inconel 600	Monel 400 & 405		Nickel 200
-20 to 100	3600	3000	3600	3600	3600	3600	3705	3750	3480	3750	3750	3750	3750	3750	3600	3750	3000	2400	-20 to 200
200	3000	2555	3185	3095	3240	3310	3395	3710	3480	3750	3750	3750	3750	3750	3325	3750	2630	2400	200
300	2690	2280	2905	2795	2975	3085	3270	3550	3435	3610	3640	3640	3640	3640	3190	3640	2450	2400	300
400	2485	2100	2710	2570	2760	2880	3170	3410	3310	3465	3530	3530	3530	3490	3095	3530	2365	2400	400
500	2330	1970	2270	2390	2580	2710	3015	3275	3210	3325	3325	3325	3325	3325	3010	3325	2365	2270	500
600	2210	1860	2470	2255	2435	2580	2840	3025	3025	3025	3025	3025	3025	3025	2940	3025	2365	2065	600
650	2160	1825	2425	2210	2375	2530	2745	2940	2940	2940	2940	2940	2940	2940	2890	2940	2365	-	650
700	2110	1800	2390	2170	2330	2485	2655	2840	2840	2840	2840	2840	2840	2840	2840	2840	2350	-	700
750	2065	1765	2350	2135	2290	2460	2535	2660	2660	2660	2660	2660	2660	2660	2660	2660	2330	-	750
800	2030	1730	2330	2110	2255	2435	2055	2540	2540	2540	2540	2540	2540	2540	2540	2540	2290	-	800
850	1980	1690	2290	2090	2230	2425	1595	-	2435	2435	2435	2435	-	2435	2435	2435	1885	-	850
900	1945	-	2245	2075	2210	2245	1150	-	2245	2245	2245	2245	-	2245	2245	2245	1370	-	900
950	1910	-	1930	1930	1930	1930	685	-	1405	1595	1930	1930	-	1930	1930	1815	-	-	950
1000	1770	-	1820	1820	1820	1820	430	-	825	1080	1335	1820	-	1820	1820	1200	-	-	1000
1050	1630	-	1765	1800	1800	1800	-	-	-	720	875	1800	-	1800	1800	770	-	-	1050
1100	1285	-	1305	1525	1560	1610	-	-	-	480	550	1510	-	1610	1610	515	-	-	1100
1150	1030	-	934	1185	1185	1370	-	-	-	325	345	1115	-	1370	1370	375	-	-	1150
1200	825	-	685	925	925	1030	-	-	-	205	205	720	-	1030	1030	345	-	-	1200
1250	670	-	515	735	705	910	-	-	-	-	-	-	-	825	720	-	-	-	1250
1300	565	-	375	585	660	685	-	-	-	-	-	-	-	600	345	-	-	-	1300
1350	465	-	290	480	430	515	-	-	-	-	-	-	-	-	275	-	-	-	1350
1400	380	-	225	380	325	380	-	-	-	-	-	-	-	-	190	-	-	-	1400
1450	290	-	165	290	255	290	-	-	-	-	-	-	-	-	170	-	-	-	1450
1500	205	-	130	205	190	205	-	-	-	-	-	-	-	-	135	-	-	-	1500

Pipe Data: Flange Ratings (cont.)

Class 2500 pressure-temperature ratings (pressure-PSIG)

Temp. °F	Materials																Temp. °F.		
	304 SS	304L or 316L SS	310 SS	316SS 316/316L SS Dual Grade	321 SS	347/348 SS	A105 Carbon Steel	Carp. 20SS	Grade F1 C-½ Mo	Grade F11 1½ Cr-½ Mo	Grade F22 2½ Cr-1 Mo	Grade F91 9 Cr-1 Mo-V	Hast. B2	Hast. C & Inconel 625 & Incoloy 825	Incoloy 800	Inconel 600		Monel 400 & 405	Nickel 200
-20 to 100	6000	5000	6000	6000	6000	6000	6170	6250	5805	6250	6250	6250	6250	6250	6000	6250	5000	4000	-20 to 100
200	5000	4260	5300	5160	5400	5520	5625	6180	5805	6250	6250	6250	6250	6250	5540	6250	4380	4000	200
300	4480	3800	4840	4660	4960	5140	5450	5920	5725	6015	6070	6070	6070	5320	6070	4080	4000	300	
400	4140	3500	4520	4280	4600	4800	5280	5680	5520	5775	5880	5880	5880	5820	5160	5880	3940	4000	400
500	3880	3280	4280	3980	4300	4520	5025	5460	5350	5540	5540	5540	5540	5540	5020	5540	3940	3780	500
600	3680	3100	4120	3760	4060	4300	4730	5040	5040	5040	5040	5040	5040	5040	4900	5040	3940	3440	600
650	3600	3040	4040	3680	3960	4220	4575	4905	4905	4905	4905	4905	4905	4905	4820	4905	3940	-	650
700	3520	3000	3980	3620	3880	4140	4425	4730	4730	4730	4730	4730	4730	4730	4730	4730	3920	-	700
750	3440	2940	3920	3560	3820	4100	4230	4430	4430	4430	4430	4430	4430	4430	4430	4430	3880	-	750
800	3380	2880	3880	3520	3760	4060	3430	4230	4230	4230	4230	4230	4230	4230	4230	4230	3820	-	800
850	3300	2820	3820	3480	3720	4040	2655	-	4060	4060	4060	4060	-	4060	4060	4060	3145	-	850
900	3240	-	3745	3460	3680	3745	1915	-	3745	3745	3745	3745	-	3745	3745	3745	2285	-	900
950	3180	-	3220	3220	3220	3220	1145	-	2345	2655	3220	3220	-	3220	3220	3030	-	-	950
1000	2950	-	3030	3030	3030	3030	715	-	1370	1800	2230	3030	-	3030	3030	2000	-	-	1000
1050	2715	-	2945	3000	3000	3000	-	-	-	1200	1455	3000	-	3000	3000	1285	-	-	1050
1100	2145	-	2170	2545	2600	2685	-	-	-	800	915	2515	-	2685	2685	855	-	-	1100
1150	1715	-	1570	1970	1970	2285	-	-	-	545	570	1855	-	2285	2285	630	-	-	1150
1200	1370	-	1145	1545	1545	1715	-	-	-	345	345	1200	-	1715	1715	570	-	-	1200
1250	1115	-	855	1230	1170	1515	-	-	-	-	-	-	-	1370	1200	-	-	-	1250
1300	945	-	630	970	915	1145	-	-	-	-	-	-	-	1000	570	-	-	-	1300
1350	770	-	485	800	715	860	-	-	-	-	-	-	-	-	455	-	-	-	1350
1400	630	-	370	630	545	630	-	-	-	-	-	-	-	-	315	-	-	-	1400
1450	485	-	275	485	430	485	-	-	-	-	-	-	-	-	285	-	-	-	1450
1500	345	-	215	345	315	345	-	-	-	-	-	-	-	-	230	-	-	-	1500

ANSI Flange Bolting Dimensions for Stud Bolts (inches)

Nominal Pipe Size	Flange Face	ANSI Pressure Class											
		150#		300#		600#		900#		1500#		2500#	
		Diam.	Length	Diam	Length	Diam	Length	Diam	Length	Diam	Length	Diam	Length
½"	RF	½"	2.25	½"	2.50	½"	3.00	¾"	4.25	¾"	4.25	¾"	4.75
	RTJ		---		3.00		3.00		4.25		4.25		4.75
¾"	RF	½"	2.50	¾"	3.00	¾"	3.50	¾"	4.50	¾"	4.50	¾"	5.00
	RTJ		---		3.50		3.50		4.50		4.50		5.00
1"	RF	½"	2.50	¾"	3.00	¾"	3.50	¾"	5.00	¾"	5.00	¾"	5.50
	RTJ		3.00		3.50		3.50		5.00		5.00		5.50
1¼"	RF	½"	2.75	¾"	3.25	¾"	3.75	¾"	5.00	¾"	5.00	1"	6.00
	RTJ		3.25		3.75		3.75		5.00		5.00		6.00
1½"	RF	½"	2.75	¾"	3.50	¾"	4.25	1"	5.50	1"	5.50	1½"	6.75
	RTJ		3.25		4.00		4.25		5.50		5.50		6.75
2"	RF	¾"	3.25	¾"	3.50	¾"	4.25	¾"	5.75	¾"	5.75	1"	7.00
	RTJ		3.75		4.00		4.25		5.75		5.75		7.00
2½"	RF	¾"	3.50	¾"	4.00	¾"	4.75	1"	6.25	1"	6.25	1½"	7.75
	RTJ		4.00		4.50		4.75		6.25		6.25		8.00
3"	RF	¾"	3.50	¾"	4.25	¾"	5.00	¾"	5.75	1½"	7.00	1½"	8.75
	RTJ		4.00		4.75		5.00		5.75		7.00		9.00
3½"	RF	¾"	3.50	¾"	4.25	¾"	5.50	---	---	---	---	---	---
	RTJ		4.00		5.00		5.50		---		---		---
4"	RF	¾"	3.50	¾"	4.50	¾"	5.75	1½"	6.75	1½"	7.75	1½"	10.00
	RTJ		4.00		5.00		5.75		6.75		7.75		10.25
5"	RF	¾"	3.75	¾"	4.75	1"	6.50	1½"	7.50	1½"	9.75	1½"	11.75
	RTJ		4.25		5.25		6.50		7.50		9.75		12.25
6"	RF	¾"	4.00	¾"	4.75	1"	6.75	1½"	7.50	1½"	10.25	2"	16.50
	RTJ		4.50		5.50		6.75		7.75		10.50		14.00
8"	RF	¾"	4.25	¾"	5.50	1½"	7.25	1½"	8.75	1½"	11.50	2"	15.00
	RTJ		4.75		6.00		7.75		8.75		12.75		15.50

*3MHP Type torqued to 20 ft. lb. with Buna-N gasket

Service Ratings of Tri-Clamp Connections

TEMP (°F)	Pressure Rating (PSI)					
	1"/1.5"	2"	2.5"	3"	4"	5"
70	1500	1000	1000	1000	1000	300
250	1200	800	800	800	800	200
400	950	725	N/A	N/A	450	N/A

RF flanges 150# and 300# class, RF-0.06"; 600# and greater, RF=0.25"

Pipe Data: Plastic Flange Ratings

Temperature (°F)	Material					
	PVC	CPVC	PVDF (Kynar®)	PTFE (Teflon®)	Fiberglass (1" to 3")	Fiberglass (4")
73	150	150	150	15	450	225
100	93	127	150	13	450	225
120	60	97	150	11	450	225
140	33	75	150	10	450	225
160	—	60	133	8	450	225
180	—	37	115	—	450	225
200	—	30	97	—	450	225
220	—	—	80	—	450	225
240	—	—	60	—	—	—
260	—	—	43	—	—	—
280	—	—	25	—	—	—
300	—	—	—	—	—	—
400	—	—	—	—	—	—

Pipe Data: Cast Iron Pipe

Cast Iron Pipe—ASA Standard

Pipe Size	Pipe O.D.	Class 50 50 PSIG		Class 100 100 PSIG		Class 150 150 PSIG		Class 200 200 PSIG		Class 250 250 PSIG		Class 300 300 PSIG		Class 350 350 PSIG	
		WALL	I.D.	WALL	I.D.	WALL	I.D.	WALL	I.D.	WALL	I.D.	WALL	I.D.	WALL	I.D.
3	3.96	0.32	3.32	0.32	3.32	0.32	3.32	0.32	3.32	0.32	3.32	0.32	3.32	0.32	3.32
4	4.80	0.35	4.10	0.35	4.10	0.35	4.10	0.35	4.10	0.35	4.10	0.35	4.10	0.35	4.10
6	6.90	0.38	6.14	0.38	6.14	0.38	6.14	0.38	6.14	0.38	6.14	0.38	6.14	0.38	6.14
8	9.05	0.41	8.23	0.41	8.23	0.41	8.23	0.41	8.23	0.41	8.23	0.41	8.23	0.41	8.23
10	11.10	0.44	10.22	0.44	10.22	0.44	10.22	0.44	10.22	0.44	10.22	0.48	10.14	0.52	10.06
12	13.20	0.48	12.24	0.48	12.24	0.48	12.24	0.48	12.24	0.52	12.16	0.51	12.16	0.56	12.08
14	15.30	0.48	14.34	0.51	14.28	0.51	14.28	0.55	14.20	0.59	14.12	0.59	14.12	0.64	14.02
16	17.40	0.54	16.32	0.54	16.32	0.54	16.32	0.58	16.24	0.63	16.14	0.68	16.04	0.68	16.04
18	19.50	0.54	18.42	0.58	18.34	0.58	18.34	0.63	18.24	0.68	18.14	0.73	18.04	0.79	17.92
20	21.60	0.57	20.46	0.62	20.36	0.62	20.36	0.67	20.26	0.72	20.16	0.78	20.04	0.84	19.92
24	25.80	0.63	24.54	0.68	24.44	0.73	24.34	0.79	24.22	0.79	24.22	0.85	24.10	0.92	23.96

Cast Iron Pipe—AWWA Standard

Pipe Size	Class A 100 Ft. 43 PSIG			Class B 200 Ft. 86 PSIG			Class C 300 Ft. 130 PSIG			Class D 400 Ft. 173 PSIG		
	O.D.	WALL	I.D.	O.D.	WALL	I.D.	O.D.	WALL	I.D.	O.D.	WALL	I.D.
3	3.80	0.39	3.02	3.96	0.42	3.12	3.96	0.45	3.06	3.96	0.48	3.00
4	4.80	0.42	3.96	5.00	0.45	4.10	5.00	0.48	4.04	5.00	0.52	3.96
6	6.90	0.44	6.02	7.10	0.48	6.14	7.10	0.51	6.08	7.10	0.55	6.00
8	9.05	0.46	8.13	9.05	0.51	8.03	9.30	0.56	8.18	9.30	0.60	8.10
10	11.10	0.50	10.10	11.10	0.57	9.96	11.40	0.62	10.16	11.40	0.68	10.04
12	13.20	0.54	12.12	13.20	0.62	11.96	13.50	0.68	12.14	13.50	0.75	12.00
14	15.30	0.57	14.16	15.30	0.66	13.98	15.65	0.74	14.17	15.65	0.82	14.01
16	17.40	0.60	16.20	17.40	0.70	16.00	17.80	0.80	16.20	17.80	0.89	16.02
18	19.50	0.64	18.22	19.50	0.75	18.00	19.92	0.87	18.18	19.92	0.96	18.00
20	21.60	0.67	20.26	21.60	0.80	20.00	22.06	0.92	20.22	22.06	1.03	20.00
24	25.80	0.76	24.28	25.80	0.89	24.02	26.32	1.04	24.22	26.32	1.16	24.00
30	31.74	0.88	29.98	32.00	1.03	29.94	32.40	1.20	30.00	32.74	1.37	30.00
36	37.96	0.99	35.98	38.30	1.15	36.00	38.70	1.36	39.98	39.16	1.58	36.00
42	44.20	1.10	42.00	44.50	1.28	41.94	45.10	1.54	42.02	45.58	1.78	42.02
48	50.50	1.26	47.98	50.80	1.42	47.96	51.40	1.71	47.98	51.98	1.96	48.06
54	56.66	1.35	53.96	57.10	1.55	54.00	57.80	1.90	54.00	58.40	2.23	53.94
60	62.80	1.39	60.02	63.40	1.67	60.06	64.20	2.00	60.20	64.82	2.38	60.06
72	75.34	1.62	72.10	75.00	1.95	72.10	76.88	2.39	72.10	—	—	—
84	87.54	1.72	84.10	88.54	2.22	84.10	—	—	—	—	—	—

Pipe Size	Class E 500 Ft. 217 PSIG			Class F 600 Ft. 260 PSIG			Class G 700 Ft. 304 PSIG			Class H 800 Ft. 347 PSIG		
	O.D.	WALL	I.D.	O.D.	WALL	I.D.	O.D.	WALL	I.D.	O.D.	WALL	I.D.
6	7.22	0.58	6.06	7.22	0.61	6.00	7.38	0.65	6.08	7.38	0.69	6.00
8	9.42	0.66	8.10	9.42	0.71	8.00	9.60	0.75	8.10	9.60	0.80	8.00
10	11.60	0.74	10.12	11.60	0.80	10.00	11.84	0.86	10.12	11.84	0.92	10.00
12	13.78	0.82	12.14	13.78	0.89	12.00	14.08	0.97	12.14	14.08	1.04	12.00
14	15.98	0.90	14.18	15.98	0.99	14.00	16.32	1.07	14.18	16.32	1.16	14.00
16	18.16	0.98	16.20	18.16	1.08	16.00	18.54	1.18	16.18	18.54	1.27	16.00
18	20.34	1.07	18.20	20.34	1.17	18.00	20.78	1.28	18.22	20.78	1.39	18.00
20	22.54	1.15	20.24	22.54	1.27	20.00	23.02	1.39	20.24	23.02	1.51	20.00
24	26.90	1.31	24.28	26.90	1.45	24.00	27.76	1.75	24.26	27.76	1.88	24.00
30	33.10	1.55	30.00	33.46	1.73	30.00	—	—	—	—	—	—
36	39.60	1.80	36.00	40.04	2.02	36.00	—	—	—	—	—	—

Pipe Data: Steel Pipe

Nominal Pipe Size, in.	Outside Diameter, in.	Schedule No.	Wall Thickness, in.	Inside Diameter, in.	Cross-sectional Area		Circumference, ft., or surface, ft/ft of length		Capacity at 1-ft/s velocity		Weight of plain-end pipe, lb/ft
					Metal, in ²	Flow, ft ²	Outside	Inside	U.S. gal/min	lb/h water	
¼	0.405	10S	.049	.307	.055	.00051	.106	.0804	.231	115.5	.19
		40ST, 40S	.068	.269	.072	.00040	.106	.0705	.179	89.5	.24
		80XS, 80S	.095	.215	.093	.00025	.106	.0563	.113	56.5	.31
¼	0.540	10S	.065	.410	.097	.00092	.141	.107	.412	206.5	.33
		40ST, 40S	.088	.364	.125	.00072	.141	.095	.323	161.5	.42
		80XS, 80S	.119	.302	.157	.00050	.141	.079	.224	112.0	.54
¾	0.675	10S	.065	.545	.125	.00162	.177	.143	.727	363.5	.42
		40ST, 40S	.091	.493	.167	.00133	.177	.129	.596	298.0	.57
		80XS, 80S	.126	.423	.217	.00098	.177	.111	.440	220.0	.74
½	0.840	5S	.065	.710	.158	.00275	.220	.186	1.234	617.0	.54
		10S	.083	.674	.197	.00248	.220	.176	1.112	556.0	.67
		40ST, 40S	.109	.622	.250	.00211	.220	.163	0.945	472.0	.85
		80XS, 80S	.147	.546	.320	.00163	.220	.143	0.730	365.0	1.09
		160	.188	.464	.385	.00117	.220	.122	0.527	263.5	1.31
		XX	.294	.252	.504	.00035	.220	.066	0.155	77.5	1.71
¾	1.050	5S	.065	.920	.201	.00461	.275	.241	2.072	1036.0	0.69
		10S	.083	.884	.252	.00426	.275	.231	1.903	951.5	0.86
		40ST, 40S	.113	.824	.333	.00371	.275	.216	1.665	832.5	1.13
		80XS, 80S	.154	.742	.433	.00300	.275	.194	1.345	672.5	1.47
		160	.219	.612	.572	.00204	.275	.160	0.917	458.5	1.94
		XX	.308	.434	.718	.00103	.275	.114	0.461	230.5	2.44
1	1.315	5S	.065	1.185	.255	.00768	.344	.310	3.449	1725	0.87
		10S	.109	1.097	.413	.00656	.344	.287	2.946	1473	1.40
		40ST, 40S	.133	1.049	.494	.00600	.344	.275	2.690	1345	1.68
		80XS, 80S	.179	0.957	.639	.00499	.344	.250	2.240	1120	2.17
		160	.250	0.815	.836	.00362	.344	.213	1.625	812.5	2.84
		XX	.358	0.599	1.076	.00196	.344	.157	0.878	439.0	3.66
1¼	1.660	5S	.065	1.530	0.326	.01277	.435	.401	5.73	2865	1.11
		10S	.109	1.442	0.531	.01134	.435	.378	5.09	2545	1.81
		40ST, 40S	.140	1.380	0.668	.01040	.435	.361	4.57	2285	2.27
		80XS, 80S	.191	1.278	0.881	.00891	.435	.335	3.99	1995	3.00
		160	.250	1.160	1.107	.00734	.435	.304	3.29	1645	3.76
		XX	.382	0.896	1.534	.00438	.435	.235	1.97	985	5.21
1½	1.900	5S	.065	1.770	0.375	.01709	.497	.463	7.67	3835	1.28
		10S	.109	1.682	0.614	.01543	.497	.440	6.94	3465	2.09
		40ST, 40S	.145	1.610	0.800	.01414	.497	.421	6.34	3170	2.72
		80XS, 80S	.200	1.500	1.069	.01225	.497	.393	5.49	2745	3.63
		160	.281	1.338	1.429	.00976	.497	.350	4.38	2190	4.86
		XX	.400	1.100	1.885	.00660	.497	.288	2.96	1480	6.41
2	2.375	5S	.065	2.245	0.472	.02749	.622	.588	12.34	6170	1.61
		10S	.109	2.157	0.776	.02538	.622	.565	11.39	5695	2.64
		40ST, 40S	.154	2.067	1.075	.02330	.622	.541	10.45	5225	3.65
		80ST, 80S	.218	1.939	1.477	.02050	.622	.508	9.20	4600	5.02
		160	.344	1.687	2.195	.01552	.622	.436	6.97	3485	7.46
		XX	.436	1.503	2.656	.01232	.622	.393	5.53	2765	9.03
2½	2.875	5S	.083	2.709	0.728	.04003	.753	.709	17.97	8985	2.48
		10S	.120	2.635	1.039	.03787	.753	.690	17.00	8500	3.53
		40ST, 40S	.203	2.469	1.704	.03322	.753	.647	14.92	7460	5.79
		80XS, 80S	.276	2.323	2.254	.02942	.753	.608	13.20	6600	7.66
		160	.375	2.125	2.945	.02463	.753	.556	11.07	5535	10.01
		XX	.552	1.771	4.028	.01711	.753	.464	7.68	3840	13.69
3	3.500	5S	.083	3.334	0.891	.06063	.916	.873	27.21	13,605	3.03
		10S	.120	3.260	1.274	.05796	.916	.853	26.02	13,010	4.33
		40ST, 40S	.216	3.068	2.228	.05130	.916	.803	23.00	11,500	7.58
		80XS, 80S	.300	2.900	3.016	.04587	.916	.759	20.55	10,275	10.25
		160	.438	2.624	4.213	.03755	.916	.687	16.86	8430	14.32
		XX	.600	2.300	5.466	.02885	.916	.602	12.95	6475	18.58
3½	4.0	5S	.083	3.834	1.021	.08017	1.047	1.004	35.98	17,990	3.48
		10S	.120	3.760	1.463	.07711	1.047	0.984	34.61	17,305	4.97
		40ST, 40S	.226	3.548	2.680	.06870	1.047	0.929	30.80	15,400	9.11
		80XS, 80S	.318	3.364	3.678	.06170	1.047	0.881	27.70	13,850	12.50
4	4.5	5S	.083	4.334	1.152	.10245	1.178	1.135	46.0	23,000	3.92
		10S	.120	4.260	1.651	.09898	1.178	1.115	44.4	22,200	5.61
		40ST, 40S	.237	4.026	3.17	.08840	1.178	1.054	39.6	19,800	10.79
		80XS, 80S	.337	3.826	4.41	.07986	1.178	1.002	35.8	17,900	14.98
		120	.438	3.624	5.58	.07170	1.178	0.949	32.2	16,100	19.00
		160	.531	3.438	6.62	.06647	1.178	0.900	28.9	14,450	22.51
		XX	.674	3.152	8.10	.05419	1.178	0.825	24.3	12,150	27.54

Pipe Data: Steel Pipe (cont.)

Nominal Pipe Size, in.	Outside Diameter, in.	Schedule No.	Wall Thickness, in.	Inside Diameter, in.	Cross-sectional Area		Circumference, ft., or surface, ft/ft of length		Capacity at 1-ft/s velocity		Weight of plain-end pipe, lb/ft		
					Metal, in ²	Flow, ft ²	Outside	Inside	U.S. gal/min	lb/h water			
5	5.563	5S	.109	5.345	1.87	.1558	1.456	1.399	69.9	34,950	6.36		
		10S	.134	5.295	2.29	.1529	1.456	1.386	68.6	34,300	7.77		
		40ST, 40S	.258	5.047	4.30	.1390	1.456	1.321	62.3	31,150	14.62		
		80SX, 80S	.375	4.813	6.11	.1263	1.456	1.260	57.7	28,850	20.78		
		120	.500	4.563	7.95	.1136	1.456	1.195	51.0	25,500	27.04		
		160	.625	4.313	9.70	.1015	1.456	1.129	45.5	22,750	32.96		
		XX	.750	4.063	11.34	.0900	1.456	1.064	40.4	20,200	38.55		
6	6.625	5S	.109	6.407	2.23	.2239	1.734	1.677	100.5	50,250	7.60		
		10S	.134	6.357	2.73	.2204	1.734	1.664	98.9	49,450	9.29		
		40ST, 40S	.280	6.065	5.58	.2006	1.734	1.588	90.0	45,000	18.97		
		80XS, 80S	.432	5.761	8.40	.1810	1.734	1.508	81.1	40,550	28.57		
		120	.562	5.501	10.70	.1650	1.734	1.440	73.9	36,950	36.39		
		160	.719	5.187	13.34	.1467	1.734	1.358	65.9	32,950	45.34		
		XX	.864	4.897	15.64	.1308	1.734	1.282	58.7	29,350	53.16		
8	8.625	5S	.109	8.407	2.915	.3855	2.258	2.201	173.0	86,500	9.93		
		10S	.148	8.329	3.941	.3784	2.258	2.180	169.8	84,900	13.40		
		20	.250	8.125	6.578	.3601	2.258	2.217	161.5	80,750	22.36		
		30	.277	8.071	7.265	.3553	2.258	2.113	159.4	79,700	24.70		
		40ST, 40S	.322	7.981	8.399	.3474	2.258	2.089	155.7	77,850	28.55		
		60	.406	7.813	10.48	.3329	2.258	2.045	149.4	74,700	35.64		
		80XS, 80S	.500	7.625	12.76	.3171	2.258	1.996	142.3	71,150	43.39		
		100	.594	7.437	14.99	.3017	2.258	1.947	135.4	67,700	50.95		
		120	.719	7.187	17.86	.2817	2.258	1.882	126.4	63,200	60.71		
		140	.812	7.001	19.93	.2673	2.258	1.833	120.0	60,000	67.76		
		XX	.875	6.875	21.30	.2578	2.258	1.800	115.7	57,850	72.42		
		160	.906	6.813	21.97	.2532	2.258	1.784	113.5	56,750	74.69		
		10	10.75	5S	.134	10.482	4.47	.5993	2.814	2.744	269.0	134,500	15.19
10S	.165			10.420	5.49	.5922	2.814	2.728	265.8	132,900	18.65		
20	.250			10.250	8.25	.5731	2.814	2.685	257.0	128,500	28.04		
30	.307			10.136	10.07	.5603	2.814	2.655	252.0	126,000	34.24		
40ST, 40S	.365			10.020	11.91	.5475	2.814	2.620	246.0	123,000	40.48		
80S, 60XS	.500			9.750	16.10	.5185	2.814	2.550	233.0	116,500	54.74		
80	.594			9.562	18.95	.4987	2.814	2.503	223.4	111,700	64.43		
100	.719			9.312	22.66	.4729	2.814	2.438	212.3	106,150	77.03		
120	.844			9.062	26.27	.4479	2.814	2.372	201.0	100,500	89.29		
140, XX	1.000			8.750	30.63	.4176	2.814	2.291	188.0	94,000	104.13		
160	1.125			8.500	34.02	.3941	2.814	2.225	177.0	88,500	115.64		
12	12.75			5S	0.156	12.438	6.17	.8438	3.338	3.26	378.7	189,350	20.98
				10S	0.180	12.390	7.11	.8373	3.338	3.24	375.8	187,900	24.17
		20	0.250	12.250	9.82	.8185	3.338	3.21	367.0	183,500	33.38		
		30	0.330	12.090	12.88	.7972	3.338	3.17	358.0	179,000	43.77		
		ST, 40S	0.375	12.000	14.58	.7854	3.338	3.14	352.5	176,250	49.56		
		40	0.406	11.938	15.74	.7773	3.338	3.13	349.0	174,500	53.52		
		XS, 80S	0.500	11.750	19.24	.7530	3.338	3.08	338.0	169,000	65.42		
		60	0.562	11.626	21.52	.7372	3.338	3.04	331.0	165,500	73.15		
		80	0.688	11.374	26.07	.7056	3.338	2.98	316.7	158,350	88.63		
		100	0.844	11.062	31.57	.6674	3.338	2.90	299.6	149,800	107.32		
		120, XX	1.000	10.750	36.91	.6303	3.338	2.81	283.0	141,500	125.49		
		140	1.125	10.500	41.09	.6013	3.338	2.75	270.0	135,000	139.67		
		160	1.312	10.126	47.14	.5592	3.338	2.65	251.0	125,500	160.27		
		14	14	5S	0.156	13.688	6.78	1.0219	3.665	3.58	459	229,500	23.07
10S	0.188			13.624	8.16	1.0125	3.665	3.57	454	227,000	27.73		
10	0.250			13.500	10.80	0.9940	3.665	3.53	446	223,000	36.71		
20	0.312			13.376	13.42	0.9750	3.665	3.50	438	219,000	45.61		
30, ST	0.375			13.250	16.05	0.9575	3.665	3.47	430	215,000	54.57		
40	0.438			13.124	18.66	0.9397	3.665	3.44	422	211,000	63.44		
XS	0.500			13.000	21.21	0.9218	3.665	3.40	414	207,000	72.09		
60	0.594			12.812	25.02	0.8957	3.665	3.35	402	201,000	85.05		
80	0.750			12.500	31.22	0.8522	3.665	3.27	382	191,000	106.13		
100	0.938			12.124	38.49	0.8017	3.665	3.17	360	180,000	130.85		
120	1.094			11.812	44.36	0.7610	3.665	3.09	342	171,000	150.79		
140	1.250			11.500	50.07	0.7213	3.665	3.01	324	162,000	170.21		
160	1.406			11.188	55.63	0.6827	3.665	2.93	306	153,000	189.11		
16	16			5S	0.165	15.670	8.21	1.3393	4.189	4.10	601	300,500	27.90
		10S	0.188	15.624	9.34	1.3314	4.189	4.09	598	299,000	31.75		
		10	0.250	15.500	12.37	1.3104	4.189	4.06	587	293,500	42.05		
		20	0.312	15.376	15.38	1.2985	4.189	4.03	578	289,000	52.27		
		30, ST	0.375	15.250	18.41	1.2680	4.189	3.99	568	284,000	62.58		
		40, XS	0.500	15.000	24.35	1.2272	4.189	3.93	550	275,000	82.77		
		60	0.656	14.688	31.62	1.1766	4.189	3.85	528	264,000	107.50		

Pipe Data: Steel Pipe (cont.)

Nominal Pipe Size, in.	Outside Diameter, in.	Schedule No.	Wall Thickness, in.	Inside Diameter, in.	Cross-sectional Area		Circumference, ft., or surface, ft ² /ft of length		Capacity at 1-ft/s velocity		Weight of plain-end pipe, lb/ft
					Metal, in ²	Flow, ft ²	Outside	Inside	U.S. gal/min	lb/h water	
		80	0.844	14.312	40.19	1.1171	4.189	3.75	501	250,500	136.61
		100	1.031	13.938	48.48	1.0596	4.189	3.65	474	237,000	164.82
		120	1.219	13.562	56.61	1.0032	4.189	3.55	450	225,000	192.43
		140	1.438	13.124	65.79	0.9394	4.189	3.44	422	211,000	223.64
		160	1.594	12.812	72.14	0.8953	4.189	3.35	402	201,000	245.25
18	18	5S	0.165	17.670	9.25	1.7029	4.712	4.63	764	382,000	31.43
		10S	0.188	17.624	10.52	1.6941	4.712	4.51	760	379,400	35.76
		10	0.250	17.500	13.94	1.6703	4.712	4.58	750	375,000	47.39
		20	0.312	17.376	17.34	1.6468	4.712	4.55	739	369,500	58.94
		ST	0.375	17.250	20.76	1.6230	4.712	4.52	728	364,000	70.59
		30	0.438	17.124	24.16	1.5993	4.712	4.48	718	359,000	82.15
		XS	0.500	17.000	27.49	1.5763	4.712	4.45	707	353,500	93.45
		40	0.562	16.876	30.79	1.5533	4.712	4.42	697	348,500	104.67
		60	0.750	16.500	40.64	1.4849	4.712	4.32	666	333,000	138.17
		80	0.938	16.124	50.28	1.4180	4.712	4.22	636	318,000	170.92
		100	1.156	15.688	61.17	1.3423	4.712	4.11	602	301,000	207.96
		120	1.375	15.250	71.82	1.2684	4.712	3.99	569	284,500	244.14
		140	1.562	14.876	80.66	1.2070	4.712	3.89	540	270,000	274.22
160	1.781	14.438	90.75	1.1370	4.712	3.78	510	255,000	308.50		
20	20	5S	0.188	19.624	11.70	2.1004	5.236	5.14	943	471,500	39.78
		10S	0.218	19.564	13.55	2.0878	5.236	5.12	937	467,500	46.06
		10	0.250	19.500	15.51	2.0740	5.236	5.11	930	465,000	52.73
		20, ST	0.375	19.250	23.12	2.0211	5.236	5.04	902	451,000	78.60
		30, XS	0.500	19.000	30.63	1.9689	5.236	4.97	883	441,500	104.13
		40	0.594	18.812	36.21	1.9302	5.236	4.92	866	433,000	123.11
		60	0.812	18.376	48.95	1.8417	5.236	4.81	826	413,000	166.40
		80	1.031	17.938	61.44	1.7550	5.236	4.70	787	393,500	208.87
		100	1.281	17.438	75.33	1.6585	5.236	4.57	744	372,000	256.10
		120	1.500	17.000	87.18	1.5763	5.236	4.45	707	353,500	296.37
		140	1.750	16.500	100.3	1.4849	5.236	4.32	665	332,500	341.09
		160	1.969	16.062	111.5	1.4071	5.236	4.21	632	316,000	397.17
		24	24	5S	0.218	23.564	16.29	3.0285	6.283	6.17	1359
10, 10S	0.250			23.500	18.65	3.012	6.283	6.15	1350	675,000	63.41
20, ST	0.375			23.250	27.83	2.948	6.283	6.09	1325	662,500	94.62
XS	0.500			23.000	36.90	2.885	6.283	6.02	1295	642,500	125.49
30	0.562			22.876	41.39	2.854	6.283	5.99	1281	640,500	140.68
40	0.688			22.624	50.39	2.792	6.283	5.92	1253	626,500	171.29
60	0.969			22.062	70.11	2.655	6.283	5.78	1192	596,000	238.35
80	1.219			21.562	87.24	2.536	6.283	5.64	1138	569,000	296.58
100	1.531			20.938	108.1	2.391	6.283	5.48	1073	536,500	367.39
120	1.812			20.376	126.3	2.264	6.283	5.33	1016	508,000	429.39
140	2.062			19.876	142.1	2.155	6.283	5.20	965	482,500	483.12
160	2.344			19.312	159.5	2.034	6.283	5.06	913	456,500	542.13
30	30			5S	0.250	29.500	23.37	4.746	7.854	7.72	2130
		10, 10S	0.312	29.376	29.10	4.707	7.854	7.69	2110	1,055,000	98.93
		ST	0.375	29.259	34.90	4.666	7.854	7.66	2094	1,048,000	118.65
		20, XS	0.500	29.000	46.34	4.587	7.854	7.59	2055	1,027,500	157.53
		30	0.625	28.750	57.68	4.508	7.854	7.53	2020	1,010,000	196.08

5S, 10S, and 40S are extracted from Stainless Steel Pipe, ANSI B36.19-1976, the American Society of Mechanical Engineers, New York. ST = standard wall, XS = extra strong wall, XX = double extra strong wall, and Schedules 10 through 160 are extracted from Wrought-Steel and Wrought-Iron Pipe, ANSI B36.10-1975. Decimal thicknesses for respective pipe sizes represent their nominal or average wall dimensions. Mill tolerances as high as $\pm 12\frac{1}{2}$ percent are permitted.



Magnetrol®

Worldwide Level and Flow SolutionsSM

CORPORATE HEADQUARTERS

5300 Belmont Road • Downers Grove, Illinois 60515-4499 USA
Phone: 630-969-4000 • Fax: 630-969-9489
magnetrol.com • info@magnetrol.com

EUROPEAN HEADQUARTERS

Heikensstraat 6 • 9240 Zele, Belgium
Phone: 052 45.11.11 • Fax: 052 45.09.93

BRAZIL: Av. Dr. Mauro Lindemberg Monteiro • 185-Jd. Santa Fé, Osasco • São Paulo CEP 06278-010

CANADA: 145 Jardin Drive, Units 1 & 2 • Concord, Ontario L4K 1X7

CHINA: Room #8008 • Overseas Chinese Mansion • 129 Yan An Road (W) • Shanghai 200040

DEUTSCHLAND: Alte Ziegelei 2-4 • D-51491 Overath

DUBAI: DAFZA Office 5AE 722, P.O. Box 293671 • Dubai, United Arab Emirates

INDIA: C-20 Community Centre • Janakpuri, New Delhi 110 021

ITALIA: Via Arese, 12 • 20159 Milano

SINGAPORE: No. 48 Toh Guan Road East #05-123 • Enterprise Hub • Singapore 608586

UNITED KINGDOM: Regent Business Centre • Jubilee Road • Burgess Hill, West Sussex RH15 9TL

Magnetrol & Magnetrol logotype are trademarks of Magnetrol International.

Kynar® is a registered trademark of Pennsalt Chemicals Corp.

Teflon® is a registered trademark of DuPont.

Copyright © 2009 Magnetrol International. All rights reserved. Printed in the USA.

Bulletin: 41-600.6 • Effective: August 2009